


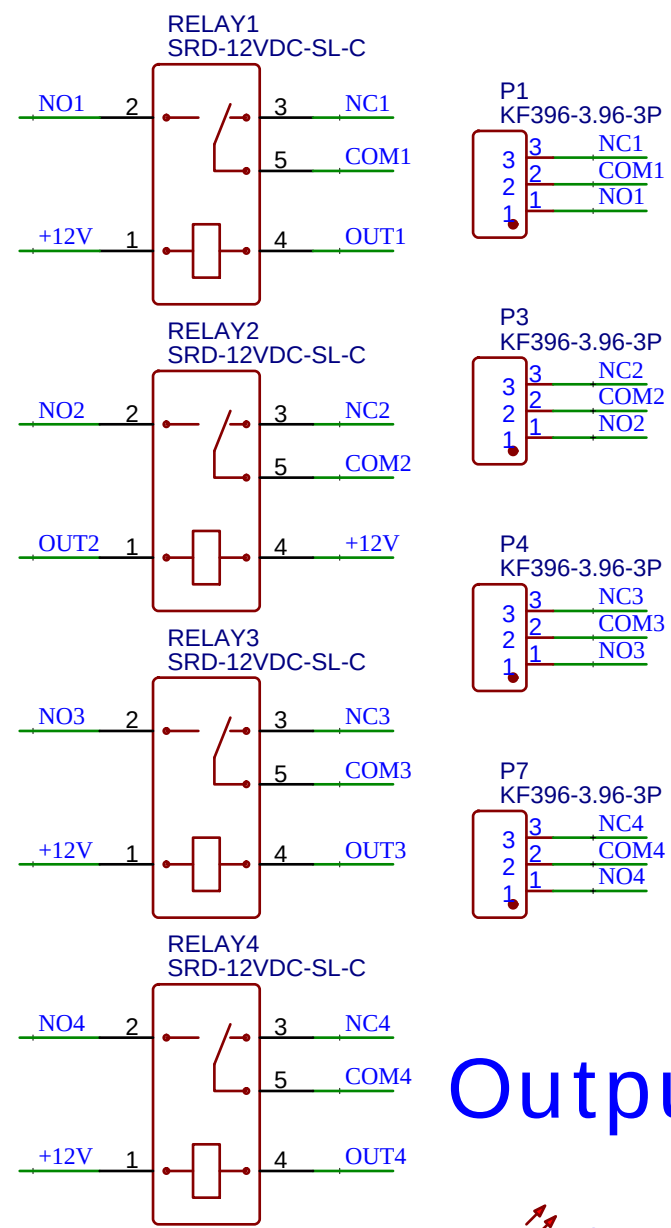
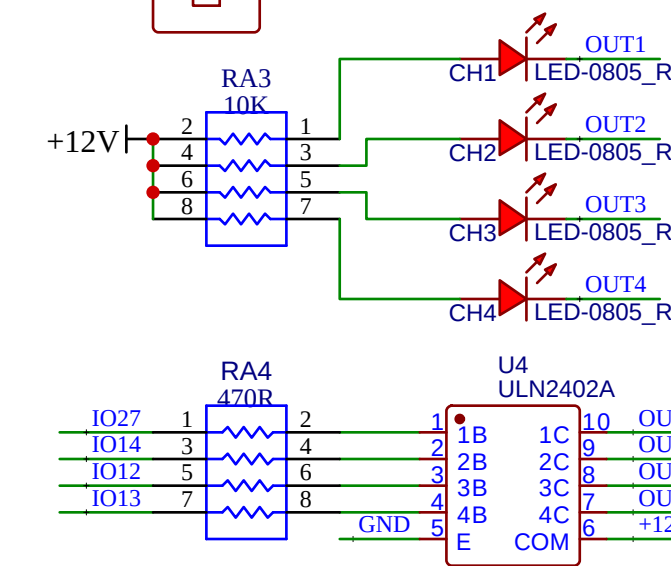






Output




CH1-CH4(Relay DO)
IO27/IO14/IO12/IO13



Free Port




IO33/IO32/IO15/IO2/IO0/IO4/IO16/IO21/IO23

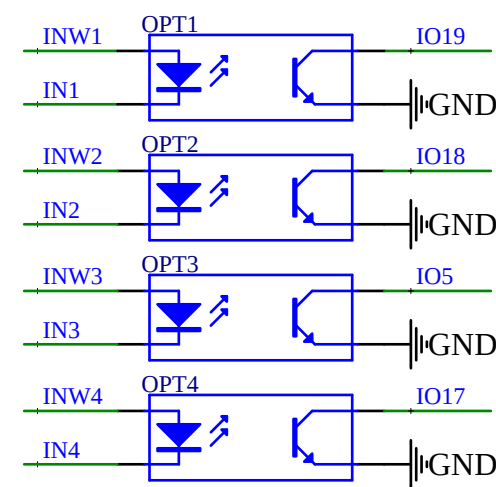








Input

Free Port

IN1-IN4(NPN DI) IO19/IO18/IO5/IO17

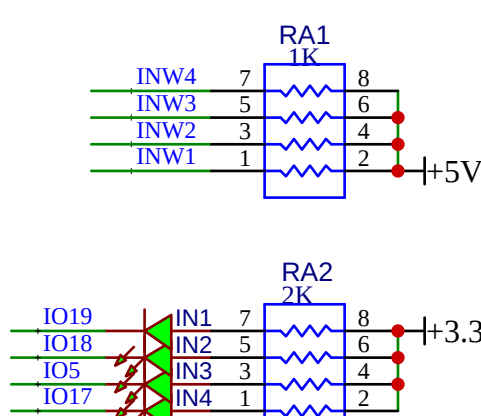


Analog Output

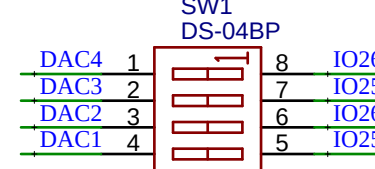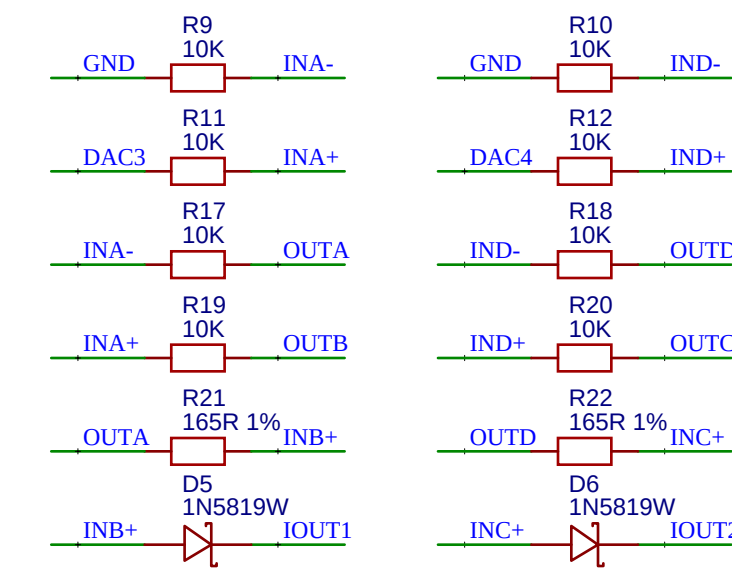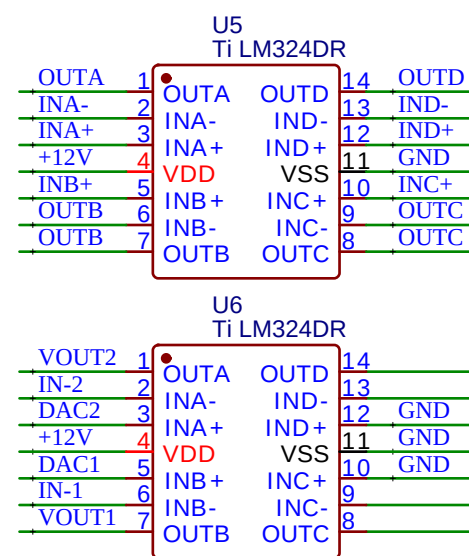


Vo1-Vo2(0-10V AO) IO25-IO26

Io1-Io2(0-20MA AO) IO25-IO26



Note: Vo1/Io1, Vo2/Io2 are multiplexed output ports,
only one of them can be enabled (selected by SW1 dip switch)

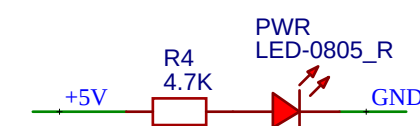

LED

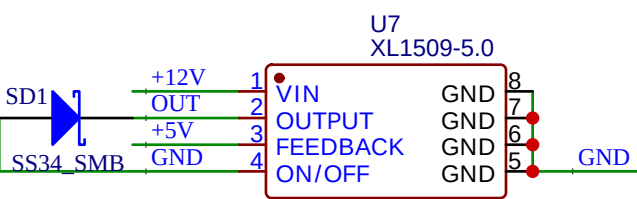


Power

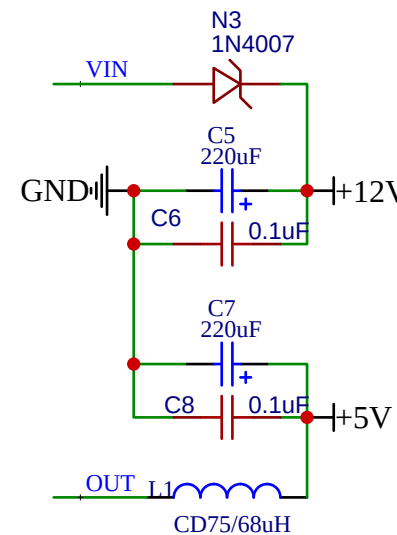


RS485

RS485 Port







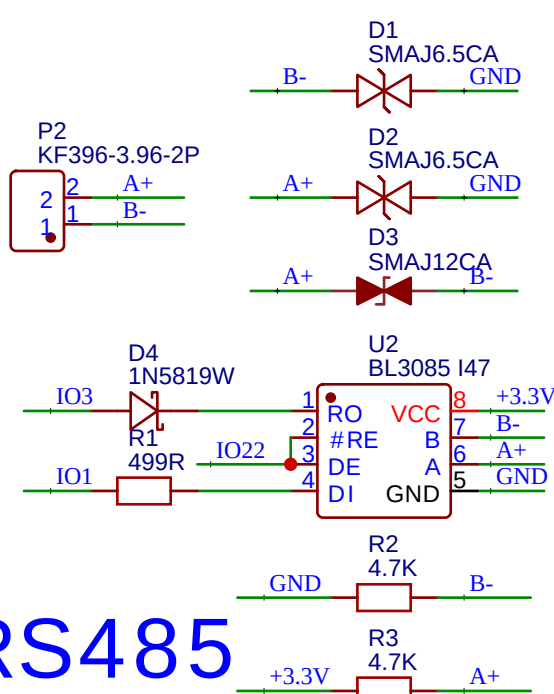


IO1/IO3/IO22

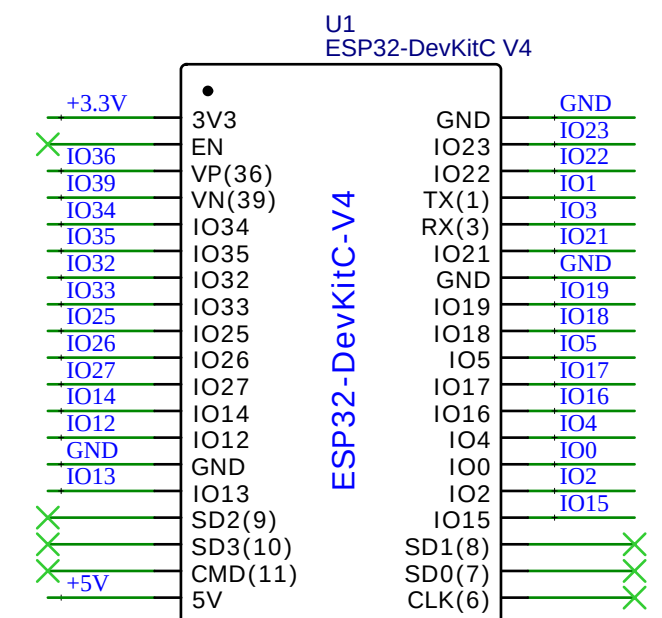

Development Board

Analog Input

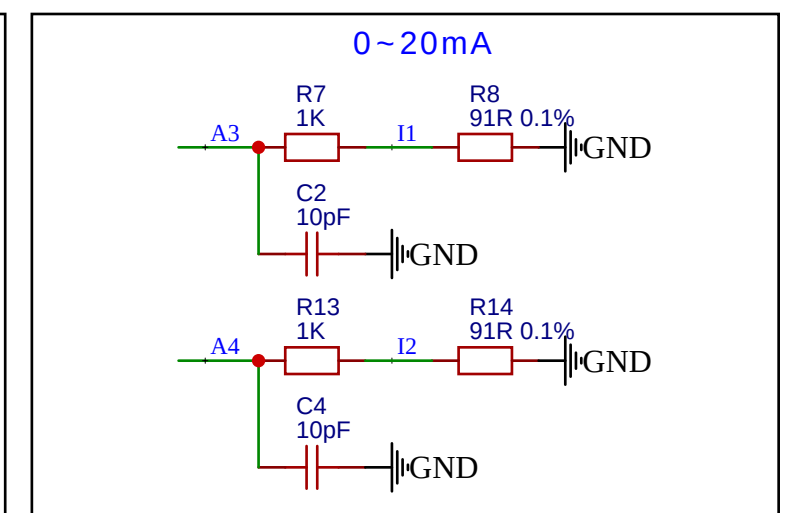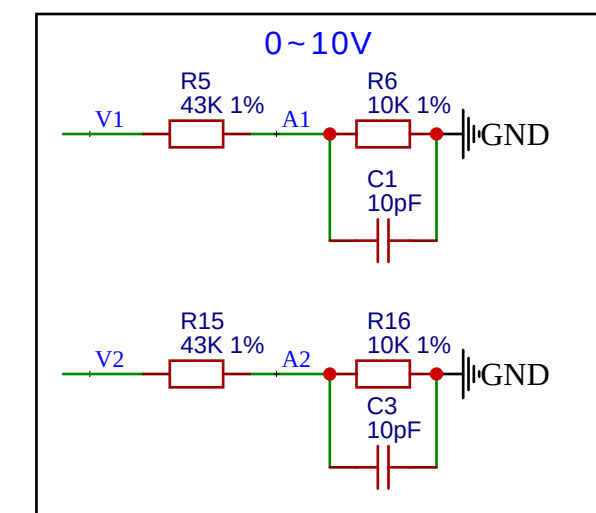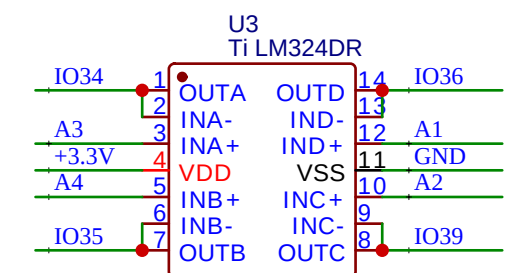

Vi1-Vi2(0-10V AI)

IO36/IO39

Ii1-Ii2(0-20MA AI)

IO34/IO35

TITLE: ES32C14		REV: 1.0
Company: 广州市超创智能科技有限公司		Sheet: 1/1
Date: 2023-07-13		Drawn By: 462645A