

# Fall Protection Roof Anchors

## Ridge Anchor Installation



- Roof Ridge Anchors must be installed properly.
- Lanyards/Ropes cannot be wrapped around the structure or nailed to the roof!
- If the crew wants the ease and efficiency of “wrap & go”...have them use the CROSS ARM STRAPS (Remember, angle does not matter, only 1 worker per cross arm strap anchor)
- The most common, the Guardian Temper ridge Anchor, is properly installed using 12 fasteners (6 per side) down the middle column. See the Guardian Instructions snips below:

### Substrate fastener requirements:

- Wood: 16d nails, or #12, 2" wood deck screws.

### Wood install:




- Into truss or support beam.
- Use (12) fasteners (6 per side) in center column of fastener installation holes.



Continue on Next Page ►


# Fall Protection Roof Anchors

## Roof Anchoring Continued

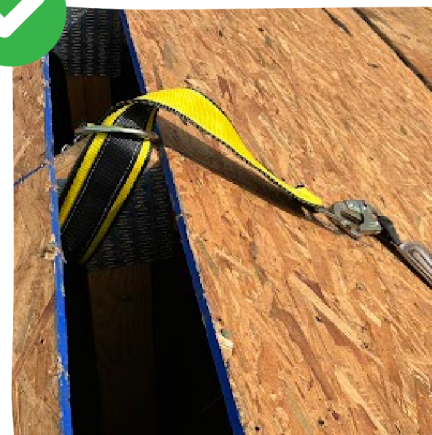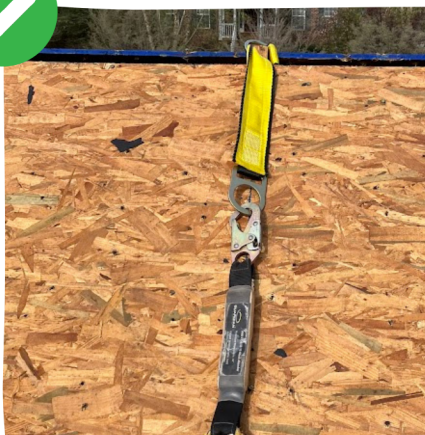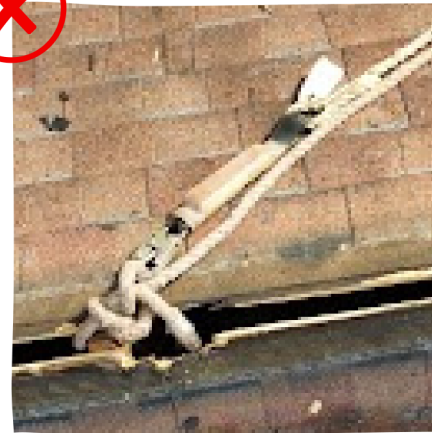

*Cross Arm Straps*

*Cross Arm Straps*

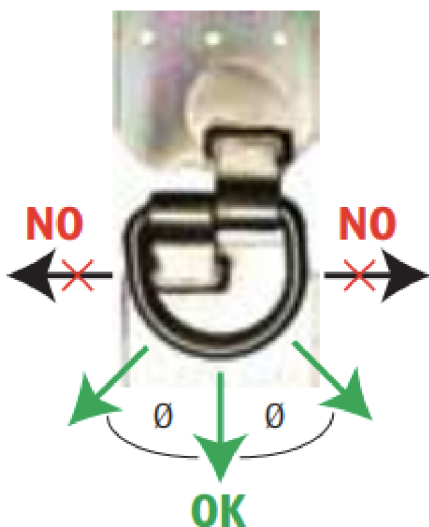

- Make sure anchors are set up so they are being used at the correct angles
- All typical anchors we use cannot be used at 90-degree angles (shown on the left)