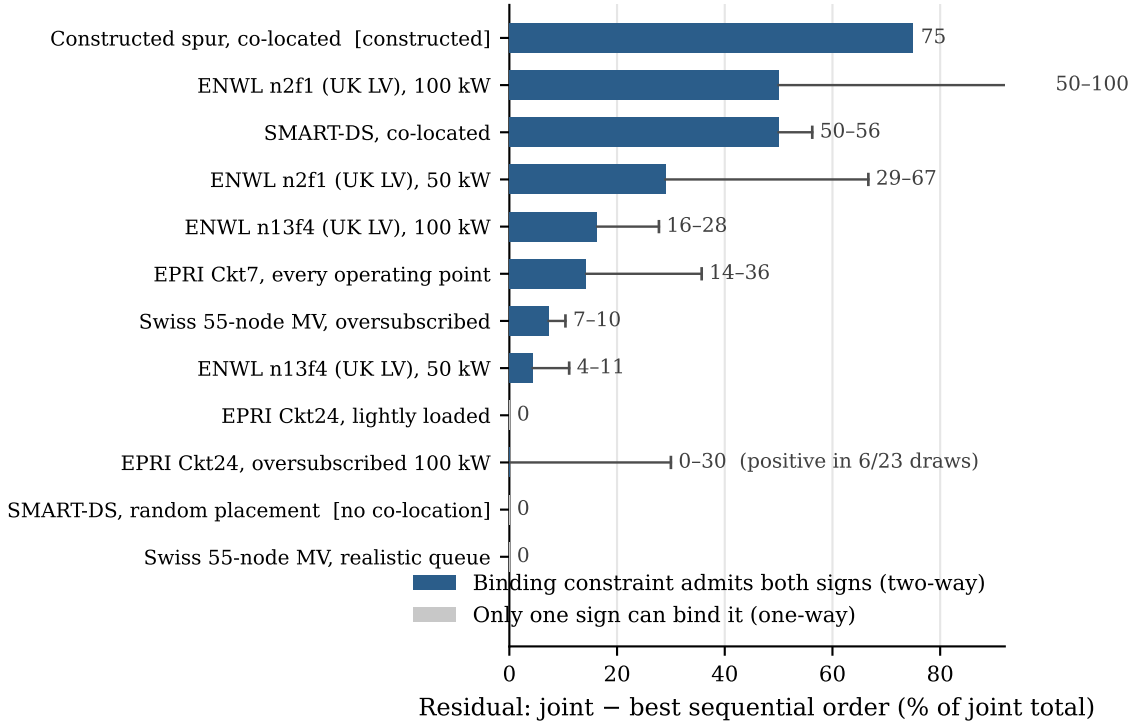
Constructed spur, co-located [constructed]
75
ENWL n2f1 (UK LV), 100 kW
50–100
SMART-DS, co-located
50–56
ENWL n2f1 (UK LV), 50 kW
29–67
ENWL n13f4 (UK LV), 100 kW
16–28
EPRI Ckt7, every operating point
14–36
Swiss 55-node MV, oversubscribed
7–10
ENWL n13f4 (UK LV), 50 kW
4–11
EPRI Ckt24, lightly loaded
0
EPRI Ckt24, oversubscribed 100 kW
0–30 (positive in 6/23 draws)
SMART-DS, random placement [no co-location]
0
Swiss 55-node MV, realistic queue
0
Binding constraint admits both signs (two-way)
Only one sign can bind it (one-way)
0
20
40
60
80
Residual: joint − best sequential order (% of joint total)