



REV.	DESCRIPTION	DATE
Α	NEW DRAWING	12/5/2005
В	Added dimensions	3/3/2006
С	dimension updates and additions	10/28/2010





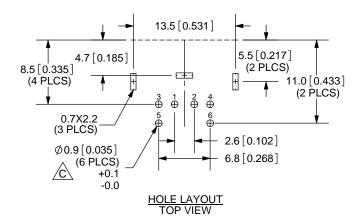





TOLERANCE: ±0.2mm UNLESS OTHERWISE SPECIFIED



20050 SW 112th Ave. Tualatin, OR 97062 Phone: 503-612-2300 800-275-4899 Fax: 503-612-2383 Website: www.cui.com

CONTACT RESISTANCE: 30m OHMS MAX INSERTION FORCE: 5KG MAX WITHDRAWAL FORCE: 0.8KG~3.5KG

SPECIFICATIONS: RATING: 12V DC @ 2A; 100V AC @ 1A

INSULATION RESISTANCE: 50M OHMS MIN: 250V DC

VOLTAGE WITHSTAND: 250V AC R.M.S. FOR 1 MINUTE

LIFE: 5,000 CYCLES

	Website. www.cui.com					
	MATERIAL	PLATING	TITLE: MINIATURE CIRCULAR DIN CONNECTOR		ONNECTOR	REV: C
SHIELDING PLATE	Steel	Tin	PART NO. MD-60SM		UNITS:	
CONTACT TERMINALS (1-6)	Phosphor Bronze	Silver			MM [INCHES]	
EARTH TERMINALS	Brass	Tin	DRAWN BY:	APPROVED BY:	•	SCALE:
HOUSING	PBT		ZRJ			2:1

PC FILE NAME: MD-60SM

COPYRIGHT 2010 BY CUI INC.