



Bootloader mode

Use A-to-A cable plugged into OTG adapter for bootloader mode, or use normal Micro-B cable and hold SW1 while plugging.

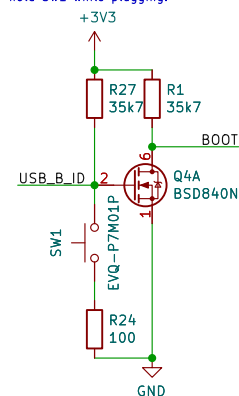


Microcontroller

Dual footprint, will accommodate STM32F072CBT (TQFP48) or STM32F072CBU (QFN48)

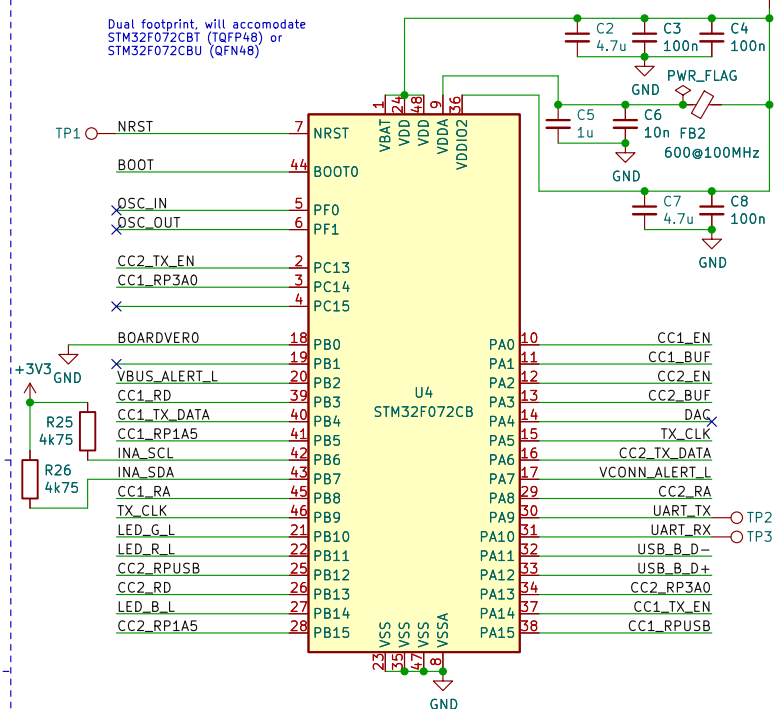

Power

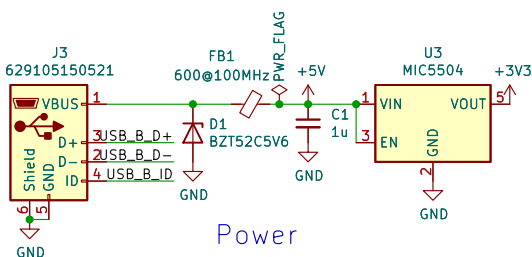

Sheet: /
File: twonkie.kicad_sch

Title:

Size: A4
KiCad E.D.A. kicad (6.0.10)

Date:

Rev:

Id: 1/1