




### Bootloader mode

Use A-to-A cable plugged into OTG adapter for bootloader mode, or use normal Micro-B cable and hold SW1 while plugging.

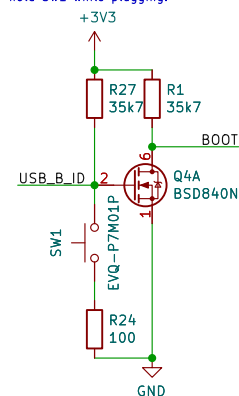

### Microcontroller

Dual footprint, will accommodate STM32F072CBT (TQFP48) or STM32F072CUB (QFN48)

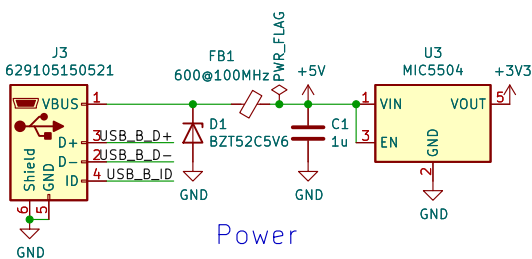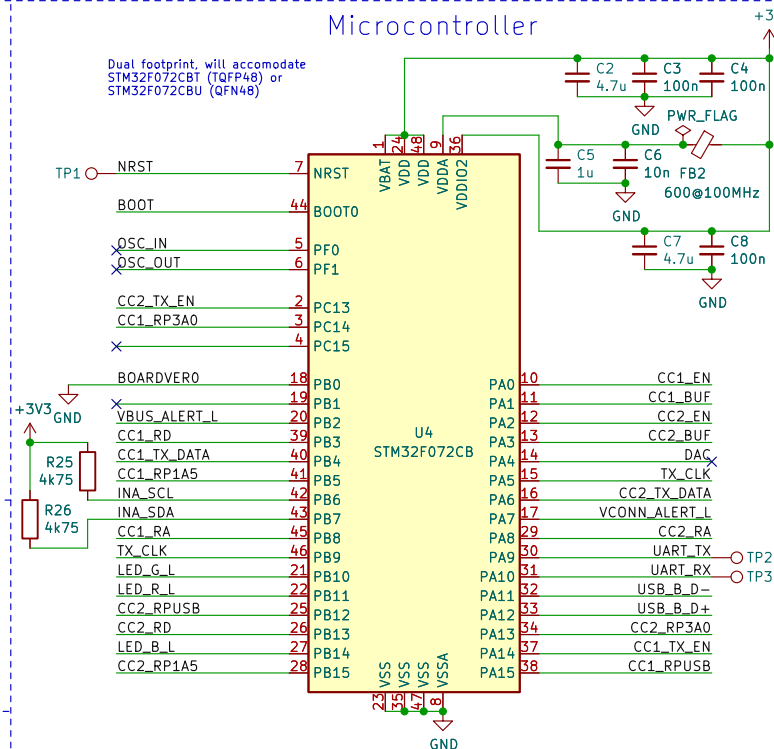

Sheet: /  
File: twonkie.kicad\_sch

### Title:

Size: A4 Date:  
KiCad E.D.A. kicad (6.0.10)

Rev:  
Id: 1/1