ON-DEMAND ANTENNA POSITIONING SYSTEM

- Humphrey Shikunzi
- Audrey Nzilani
- Supervisor : Eng. Louie Okeyo

PROBLEM STATEMENT

- Companies are more focused on 5G, yet about 95% of customers are still using 4G and below, which have their Antennas supported by RET

- Currently only Vertical tilt is done remotely while azimuth is set once manually and remains fixed making optimization limited.

Objectives

To build a low cost and efficient On-Demand Antenna Positioning System

To develop a clustering machine learning algorithm

To develop a localization algorithm for distance and bearing calculation

To use the developed clustering and localization algorithms, a microcontroller and motor to vary antenna bearing

Justification

Big Tech Companies Spend Billions of dollars on 5G Beam forming research, we can achieve same goal with a smaller investment and currently available local materials

Safaricom can sell our tech to other Telecom companies in East and Central Africa, making even more profift

Efficient network usage for on-site customers, happy customers rate the company highly, hence improved
company net promoter score

Reduced cost by Automation of Antenna Positioning, currently manual costs are incurred

Reduced number of Antennas per BTS, a few can be used in remote areas
unlike current method of sectoring in less populated areas

safaricom

Roll-Out Cost

Section	Requirements	Cost in US dollars
Software	Digital Ocean (Cloud Server)	$50 per month
Hardware	Control System • Raspberry pi Microprocessor controller • Arduino Mega	$50 $30
	Drive System • Encoded Motor • Motor driver • Power Supply • Power transmission-gears and bearings	$1000 $200 $150 $2000
	Enclosure and mounting • Casing for electronics • Mounting brackets and screws • Pole adjustment fitting	$500 $2000 $500
TOTAL		= $6530

Safaricom

METHODOLOGY
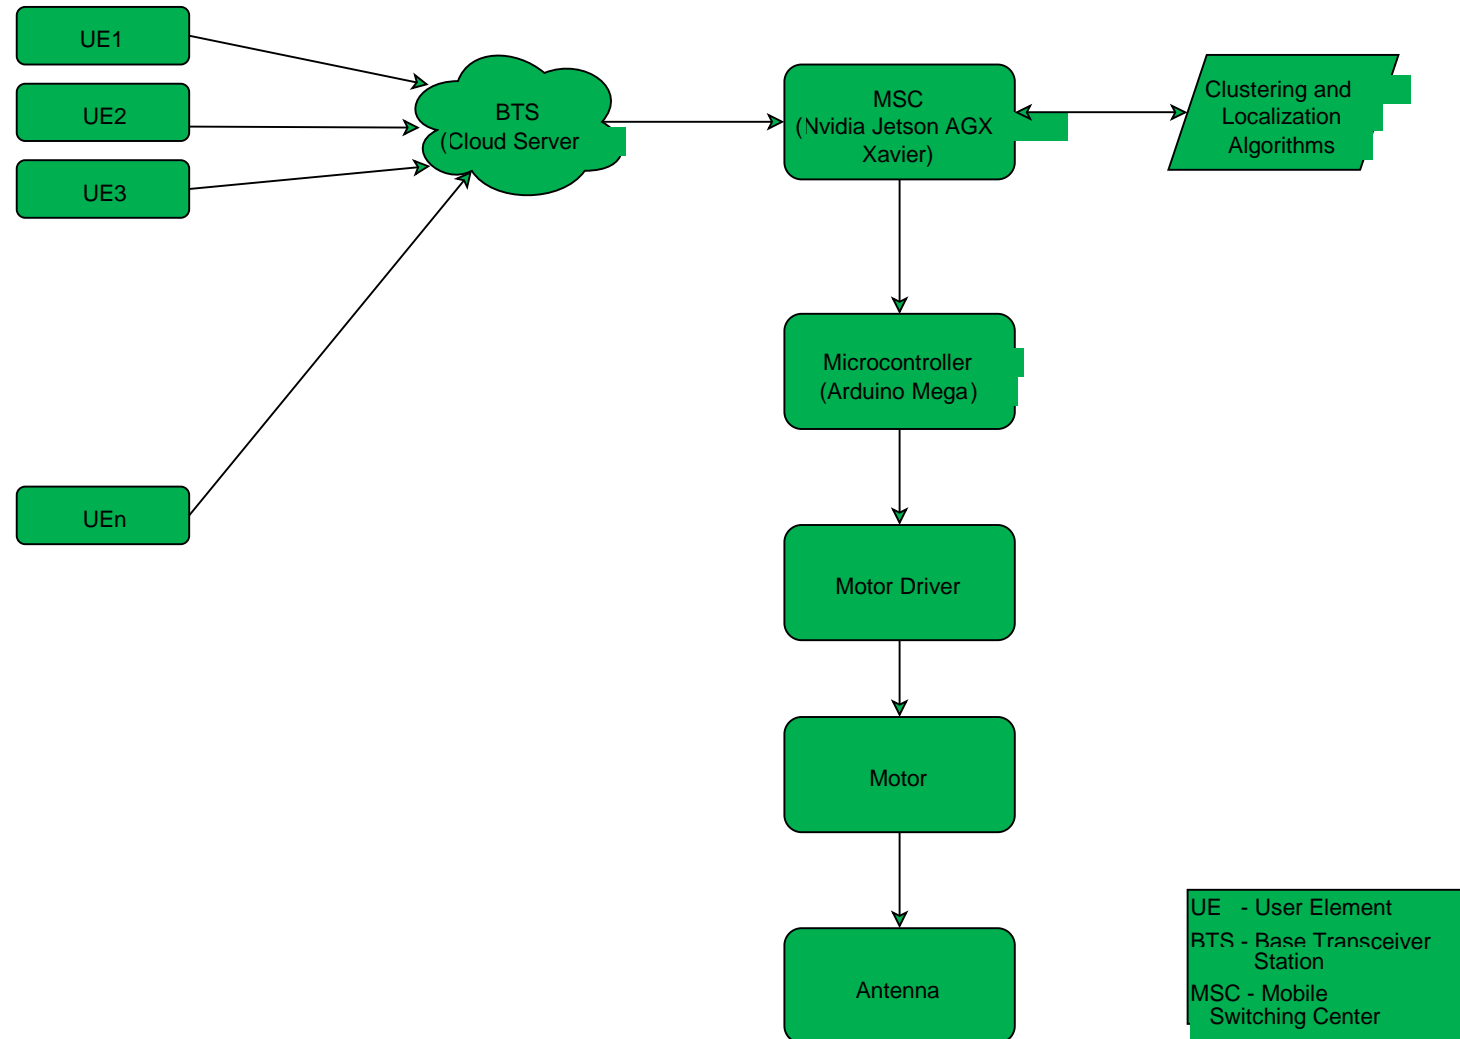
Ml Clustering Algorithm - Kmeans

Elbow Method
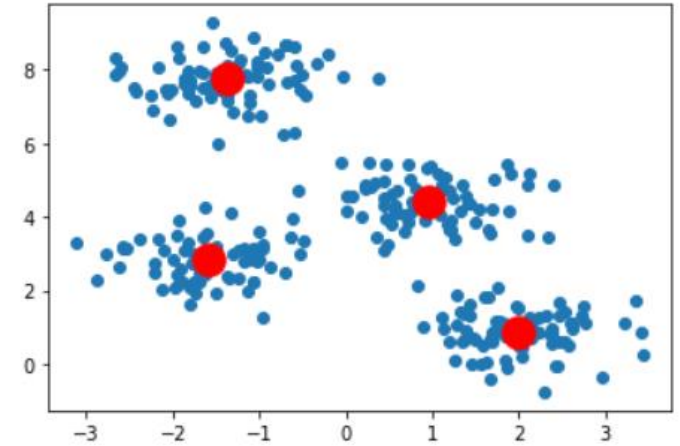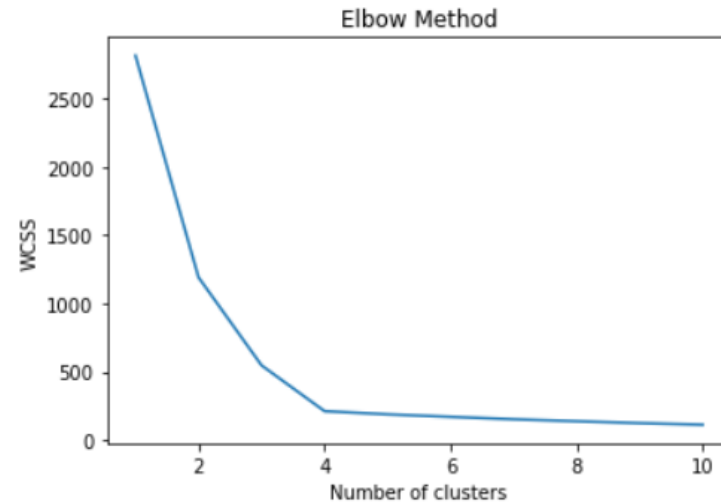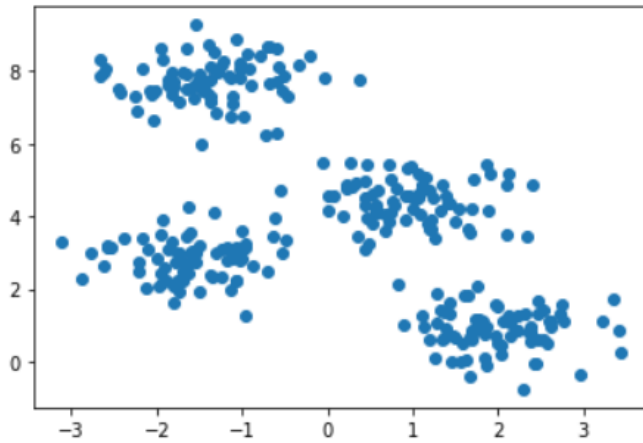
- Getting information about network users
- GPS Coordinates

- Cluster the users and determine optimal no. of clusters using Elbow and Silhoutte algorithm

- Select the largest cluster and determine its centroid
- Calculate Bearing based on centroid(Coordinates)

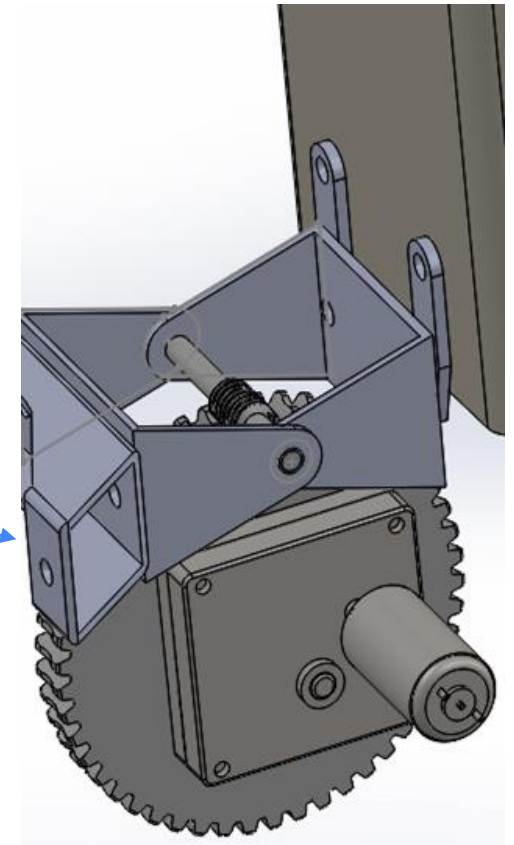GitHub : KMeans Algorithm

Safaricom

Design Of Actual Antenna
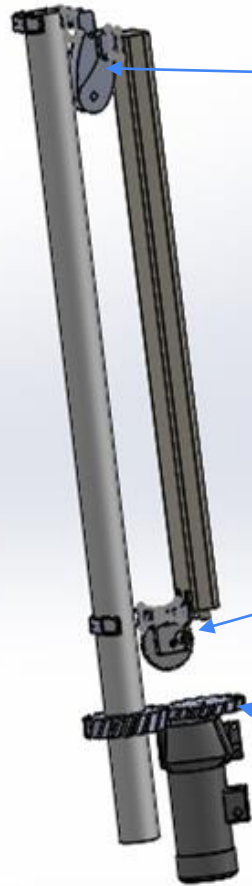
Linkages loosely set to allow for motion by the worm gear for elevation control

Inclination motion using a worm gear and position control motor

Rotation along z axis in x-y plane using helical gears and position control motor for azimuth control

Prospective design for the field antenna model : Kathrein 80010504V01
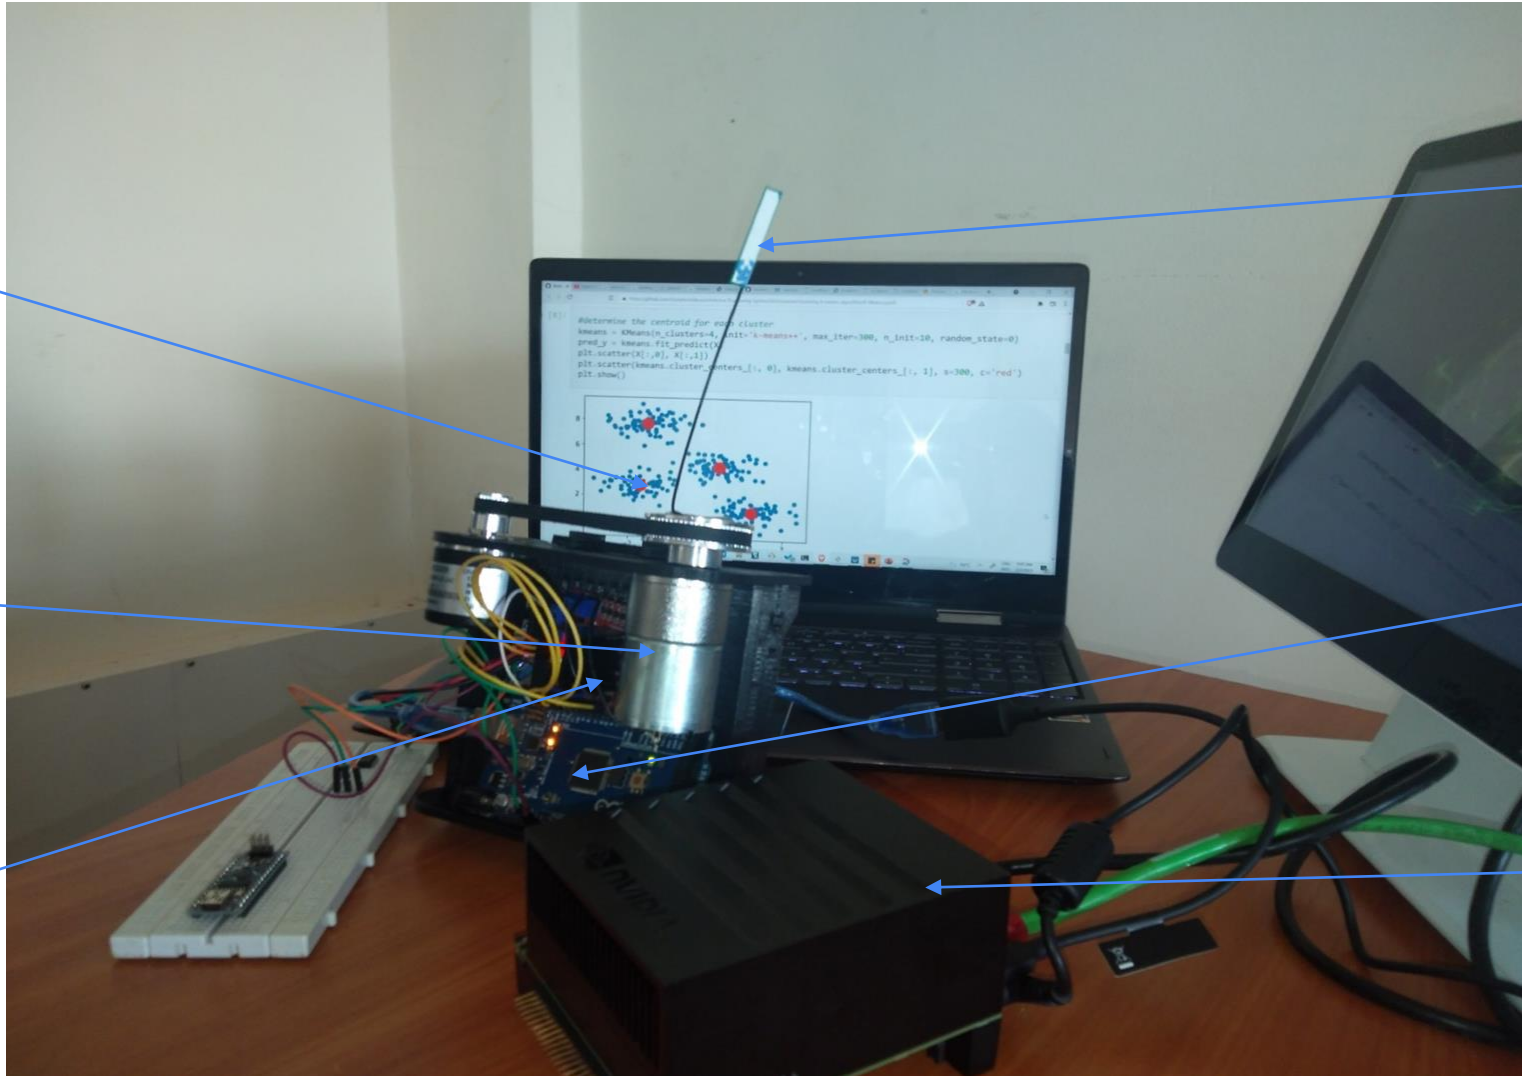
Lab Setup & Demo

Antenna
(Points to bigger cluster)

Network user clusters

Motor
(Mechanically Connected to Antenna and moves it)

Arduino
(Reads Jetson output(Bearing), Controls Motor Driver)

Jetson AGX Xavier
(Runs ML Algorithm and Compute Bearing, Send result to Arduino)

Motor Driver(Controls Motor)

Project Code : **Odap**

Safaricom

Challenges

- Figuring out the existing antenna technologies used by Telcom Companies

- Making sure that our project was economically viable regarding the existing 5G beam forming technology

Thank You

Q&A