

SPECTRAL STABILITY OF PLASMA FLOWS IN THE MAGNETIC NOZZLE

A thesis submitted to the
College of Graduate and Postdoctoral Studies
in partial fulfillment of the requirements
for the degree of Master of Science
in the Department of Physics and Engineering Physics
University of Saskatchewan
Saskatoon

By
Hunt Feng

©Hunt Feng, August 2024. All rights reserved.

Unless otherwise noted, copyright of the material in this thesis belongs to
the author.

Permission to Use

In presenting this thesis in partial fulfillment of the requirements for a Postgraduate degree from the University of Saskatchewan, I agree that the Libraries of this University may make it freely available for inspection. I further agree that permission for copying of this thesis in any manner, in whole or in part, for scholarly purposes may be granted by the professor or professors who supervised my thesis work or, in their absence, by the Head of the Department or the Dean of the College in which my thesis work was done. It is understood that any copying or publication or use of this thesis or parts thereof for financial gain shall not be allowed without my written permission. It is also understood that due recognition shall be given to me and to the University of Saskatchewan in any scholarly use which may be made of any material in my thesis.

Disclaimer

Reference in this thesis to any specific commercial products, process, or service by trade name, trademark, manufacturer, or otherwise, does not constitute or imply its endorsement, recommendation, or favoring by the University of Saskatchewan. The views and opinions of the author expressed herein do not state or reflect those of the University of Saskatchewan, and shall not be used for advertising or product endorsement purposes.

Requests for permission to copy or to make other uses of materials in this thesis in whole or part should be addressed to:

Head of the Department of Physics and Engineering Physics
116 Science Place
University of Saskatchewan
Saskatoon, Saskatchewan
Canada
S7N 5E2

OR

Dean
College of Graduate and Postdoctoral Studies
University of Saskatchewan
116 Thorvaldson Building, 110 Science Place
Saskatoon, Saskatchewan S7N 5C9 Canada

Abstract

In this thesis, spectral stability of plasmas is understood as an eigenvalue problem of linearized plasma equations describing time dynamics near some equilibrium state. Presence of eigenvalues with positive imaginary part would indicate the instability when small fluctuations will grow (typically exponentially) in time. A particular focus is the stability of plasma with stationary flows, in particular, flows in the magnetic nozzle. Magnetic nozzle, or magnetic mirror configurations, with converging-diverging magnetic field are used to accelerate plasma in plasma propulsion systems (magnetic Laval nozzle) and in fusion devices aiming to confine plasma and reach controlled thermonuclear fusion. We consider the linear stability of plasma flows under different boundary conditions. The linearized plasma equations are discretized and spectral stability problem is reduced to a polynomial eigenvalue problem. We found that the subsonic and supersonic flows are stable for Dirichlet boundary conditions. The supersonic flow is unstable for the mixed (fixed-open) boundary conditions. The subsonic flow has conflicting modes; i.e., the ground mode is unstable while the rest are stable. We show that different spectral methods, spectral-collocation and spectral-Galerkin methods agree. Phenomena of spectral pollution resulting in spurious unstable modes is discussed. By studying the convergence of different modes, we successfully eliminated the spurious modes. The stability problem of the transonic velocity profile has an additional difficulty due to the singularity at the sonic point, the point when the flow velocity is equal to the local sound velocity. At this point, the coefficient in front of the highest derivative of the differential eigenvalue equation becomes zero. In this case, the direct application of the spectral methods is problematic. To solve this problem, we solve the equation near the singularity by the Frobenius method and then use the regular solution with the shooting method to find the eigenvalues. We find that the transonic accelerating velocity profile is stable.

Acknowledgements

I would like to express my gratitude to my supervisor, Prof. Andrei Smolyakov, for his continuous support, motivation and guidance throughout my work on this thesis. I am thankful to be able to learn from him and be supervised by him. I am also thankful to Prof. Adam Bourassa for his help. I extend my heartfelt thanks to my family and especially my wife Alice. Her continuous support has made my master's program a joyful journey. I also grateful to my little baby boy, Johnathan, who gives me courage and inspiration every day. Lastly, I want to thank all my good friends in Saskatoon. The time we spent discussing physics, movies, musics and French made Saskatoon feel like home.

Contents

Permission to Use	i
Abstract	ii
Acknowledgements	iii
Contents	iv
List of Tables	vi
List of Figures	vii
1 Introduction	1
1.1 Plasma	1
1.1.1 Definition of Plasma	1
1.2 Stability	5
1.2.1 Plasma Stability	5
1.2.2 Spectral Stability of Partial Differential Equations	6
1.3 Magnetic Nozzle	8
1.3.1 Magnetic Field in Magnetic Nozzle	8
1.3.2 Velocity Profiles of Plasma Flow in Magnetic Nozzle	10
1.4 Flow in Similar Configuration: Bondi-Parker Flow	10
1.5 Goals of this Thesis	12
2 Basic Fluid Equations and Plasma Flow in Magnetic Nozzle	14
2.1 Kinetic Theory	14
2.1.1 Single Particle Motion in Uniform Magnetic and Electric Fields	14
2.1.2 Adiabatic Invariant - Magnetic Moment	16
2.1.3 From Kinetic Theory to Fluid Description	16
2.2 Equation of Motion of the Plasma Flow in Nozzle	18
2.3 Plasma Flow in the Equilibrium	20
2.3.1 Velocity Profiles	20
3 Eigenvalue Problem	23
3.1 Linearized Governing Equations	23
3.2 Polynomial Eigenvalue Problem	24
3.3 Analytical Solutions to Constant Velocity Case	25
3.3.1 Dirichlet Boundary	25
3.3.2 Fixed-Open Boundary	26
4 Spectral Method	28
4.1 Spectral Collocation Method	29
4.2 Spectral Galerkin Method	33
4.3 Spectral Theory in Finite-Dimensional Normed Spaces	36
4.4 Spectral Pollution and Spurious Modes	37
4.4.1 Analysis of Numerical Spectrum	37
4.4.2 Convergence Test	38
4.5 Plasma Flow with Constant Velocity Profile	40
4.5.1 Constant Subsonic Velocity Case	41
4.5.2 Constant Supersonic Velocity Case	42

4.6	Plasma Flow with Spatially Varying Velocity Profiles	45
4.6.1	Subsonic Case	45
4.6.2	Supersonic Case	46
5	Singular Perturbation	50
5.1	Presence of Singularity in Transonic Cases	50
5.2	Expansion at Singularity	50
5.3	Shooting Method	52
5.4	Plasma Flow with Accelerating Velocity Profile	54
6	Discussion	55
6.1	Summary of the Results	55
6.2	Limitations and Future Work	56
6.2.1	Spectral Method	56
6.2.2	Shooting Method	56
	References	57
	Appendix A Analytical Solutions	59

List of Tables

4.1 With Dirichlet boundary condition, all methods have good accuracy, so using 101 nodes in the region $[0, 1]$ is enough. For FE and SE methods, we use 50 basis functions. 40

List of Figures

1.1	Typical plasmas. Adapted from [2].	2
1.2	Debye shielding. Adapted from [1]. A positive test charge is put into a plasma. Electrons will surround the charge. Ions are neglected from the picture since they are repelled away from the charge.	2
1.3	Potential distribution near a positive charge in a plasma. The charge is centered at the origin, the potential generated by this positive charge decreases exponentially.	4
1.4	Mechanism of plasma oscillations. Adapted from [1]. As the electrons are pulled away from the ions, electric field forms and will pull the electrons back to the equilibrium position. Hence oscillation happens.	5
1.5	Mechanical analogy of various types of equilibrium. Adapted from [1].	6
1.6	Visualization of two-stream instability in the phase space. Each point in the phase space represents location and velocity of a particle. (a) Initially the ion (top cluster) and electron (bottom cluster) flow in opposite direction. (b) The velocity of both flows start to oscillate. (c) Chaotic behavior occurs. (d) The chaotic behavior continues. The perturbations gain their energy from the external energy that drives the beams. Adapted from [3].	6
1.7	A simplified example of a magnetic nozzle configuration. On the left ($z = -1$) is the entrance of the nozzle. The plasma flows into the nozzle from the left and will be accelerated and finally exhaust through the exit on the right ($z = 1$). The magnetic field lines are shaped in such a way that it forms a magnetic mirror configuration. Plasma flow with specific subsonic speed at the entrance will be accelerated to supersonic speed.	9
1.8	This is the magnetic field in nozzle with $R = 1.5$, and the spread of magnetic field, $\delta = 0.1/0.3 = 0.3$	10
1.9	Representative trajectories of the steady-state BP flow in non-dimensional units. The velocities are shown in absolute values. Adapted from [8]. The upward pink line represents an accelerating flow, it accelerates from subsonic to supersonic. The downward pink line represents a decelerating flow. The green lines below the pink lines represent subsonic flows, and the green lines above represent supersonic flows. Orange lines are physically impossible scenarios. If the sign of the velocity is positive, then it is an outward (Parker) flow, otherwise it is an inward (Bondi) flow.	12
2.1	A charged particle gyrates about the magnetic field line. The velocity along the field line is \mathbf{v}_{\parallel} and the Larmor frequency is $\omega_c = q B/m$, and the Larmor radius is $r_L = mv_{\perp}/ q B$. Moreover, for static, nonuniform magnetic field, the charged particle will stay on the same magnetic field line as it gyrates.	15
2.2	A particle bouncing between turning points a and b in a magnetic mirror. Adapted from [1].	17
2.3	The graph of $y = W(x)$ for real $x < 5$ and $y > -4$. The upper branch (blue) with $y \geq -1$ is the graph of the function $W_0(x)$ (principal branch), the lower branch (orange) with $y \leq -1$ is the graph of the function $W_{-1}(x)$. The left most point of the curve is at $(-1/e, -1)$	21
2.4	The velocity profile in the magnetic nozzle is completely determined by the midpoint mach number v_m and the branch k . A subsonic profile can be obtained by selecting $v_m < 1$ and $k = 0$. On the other hand, a supersonic profile can be obtained by setting $v_m > 1$ and $k = -1$. Lastly, for the transonic velocity profiles, the midpoint velocity is set to unity, $v_m = 1$, and then by choose $k = 0$ for $x < 0$ and $k = -1$ for $x > 0$ we get accelerating profile. Decelerating profile can be obtained similarly.	22
3.1	The plots show the first three non-zero exact solutions to Eq. (3.7) with Dirichlet boundary for both subsonic and supersonic plasma flow. The subsonic and supersonic plasma flows are stable.	26

3.2	The plots show the first three exact solutions to Eq. (3.7) with fixed-open boundary for both subsonic and supersonic plasma flows. The flow is stable for subsonic case and unstable for supersonic case.	27
4.1	Construction of N -point Chebyshev differentiation matrix. The nodes $x_j = \cos(j\pi/N)$ are Chebyshev points. Adapted from [16].	30
4.2	Comparison of accuracy between Chebyshev differentiation matrix and 2nd order finite difference differentiation matrix. Both methods are applied to compute the derivative of function $f(x) = \ln(2 + \sin(x))$ on $[-1, 1]$ using different resolutions, i.e. number of points N . We see that Chebyshev achieve higher accuracy using same amount of points.	31
4.3	Since the function v is zero at x_0 and x_N , the first and last columns has no effect and the same argument applies to first and last rows. Adapted from [16].	32
4.4	Compact Legendre combinations satisfying Dirichlet boundary condition.	34
4.5	Compact Legendre combinations satisfying fixed-open boundary condition.	35
4.6	(a) Eigenfunction corresponding to a spurious eigenvalue, the oscillation frequency is so high that the wave length is about the grid size. (b) Eigenfunction corresponding to a true eigenvalue.	39
4.7	The figure shows eigenvalues under different resolutions. True eigenvalues converge to the analytical eigenvalues as resolution increases. Spurious eigenvalues diverges with no obvious pattern.	40
4.8	Showing the first five eigenvalues obtained by spectral-collocation and spectral-Galerkin methods. The plasma flow in the magnetic nozzle with constant subsonic velocity and Dirichlet boundary is stable. Spectral methods agree with exact eigenvalues.	41
4.9	Showing the absolute errors of spectral-collocation and spectral-Galerkin methods. The accuracy of eigenvalues obtained by spectral-Galerkin method drops faster than that of spectral-collocation method. We only focus on the first eigenmodes.	42
4.10	Showing the first five eigenvalues obtained by spectral-collocation and spectral-Galerkin methods. The plasma flow in the magnetic nozzle with constant subsonic velocity and fixed-open boundary is stable. Spectral methods agree with exact eigenvalues.	43
4.11	Showing the first five eigenvalues obtained by spectral-collocation and spectral-Galerkin methods. The plasma flow in the magnetic nozzle with constant subsonic velocity and fixed-open boundary is stable. Spectral methods agree with exact eigenvalues.	43
4.12	Showing the first five true eigenvalues obtained by spectral-collocation and spectral-Galerkin methods. The plasma flow in the magnetic nozzle with constant supersonic velocity and Dirichlet boundary is stable. Spectral methods agree with exact eigenvalues.	44
4.13	Showing the first five true eigenvalues obtained by spectral-collocation and spectral-Galerkin methods. The plasma flow in the magnetic nozzle with constant supersonic velocity and Dirichlet boundary is stable. Spectral methods agree with exact eigenvalues.	44
4.14	Showing the first five true eigenvalues obtained by spectral-collocation and spectral-Galerkin methods. The plasma flow in the magnetic nozzle with constant supersonic velocity and fixed-open boundary is unstable.	45
4.15	Showing the first five true eigenvalues obtained by spectral-collocation and spectral-Galerkin methods. The plasma flow in the magnetic nozzle with constant supersonic velocity and fixed-open boundary is unstable.	46
4.16	Showing the first five eigenvalues obtained by spectral-collocation and spectral-Galerkin method. This indicates that the subsonic plasma flow in magnetic nozzle with Dirichlet boundary is stable. Two methods agree with each other reasonably well the eigenvalues are overlapped.	47
4.17	Showing the first five eigenvalues obtained by spectral-collocation and spectral-Galerkin method. This indicates that the subsonic plasma flow in magnetic nozzle with fixed-open boundary is stable (except ground mode). Two methods agree with each other reasonably well the eigenvalues are overlapped.	47

4.18	Showing the first five true eigenvalues obtained by spectral-collocation and spectral-Galerkin method. This indicates that the supersonic plasma flow in magnetic nozzle with Dirichlet boundary is stable. Two methods agree well on the first 3 eigenmodes, and starts to deviate from each other after that. Nevertheless, these eigenvalues have near-zero imaginary parts. The eigenvalues obtained by spectral-Galerkin have imaginary parts within $\pm 10^{-3}$ and the eigenvalues obtained by spectral-collocation have imaginary parts within $\pm 10^{-13}$	48
4.19	Showing the first five true eigenvalues obtained by spectral-collocation and spectral-Galerkin method. Two methods agree well on the first three modes, and start to have significant difference after that. Despite having some different eigenvalues, these eigenvalues all have positive imaginary parts, suggesting that the supersonic plasma flow in the magnetic nozzle with fixed-open boundary is unstable.	49
5.1	An attempt to solve the polynomial eigenvalue problem, Eq. (3.6) using finite-difference. Eigenfunctions are squeezed to the center of the nozzle due to the existence of the singularity at $z = 0$	51
5.2	Showing the first 5 eigenmodes, they are stable.	54

1 Introduction

This thesis involves several concepts, plasma, spectral instability, and magnetic nozzle. In the first chapter, we will introduce these concepts. We will start by introducing the definition of plasma, then discuss the relation between the plasma stability and the spectral stability of the governing equations. The general procedure of analyzing spectral stability will be discussed. Following that, magnetic nozzle and magnetic mirror configuration will be introduced. After having these necessary knowledge, we are able to discuss the methods for analyzing the spectral instability of plasma flow in magnetic nozzle.

1.1 Plasma

Plasma is one of the fundamental states of matter, distinct from solids, liquids, and gases. In a plasma, atoms or molecules are ionized, meaning they have been stripped of their electrons, resulting in a collection of charged particles—ions and electrons. Often referred to as the fourth state of matter, plasma differs from the other states as it does not involve a phase transition. Plasma is ubiquitous in the universe, present in stars like the Sun, where nuclear fusion occurs at extremely high temperatures, and in phenomena such as solar wind, lightning, and auroras. These natural plasmas are visible in the sky because plasma emits light [1]. Plasma also has numerous scientific and technological applications. Artificially generated plasma is used in fluorescent lights, neon signs, and various advanced technologies. It plays a crucial role in nuclear fusion research, plasma cutting and welding, plasma medicine for disease treatment, and even spacecraft propulsion. Overall, plasma is a fascinating and versatile state of matter with significant implications across science, technology, and industry. Fig. 1.1 illustrates some common examples of natural and artificial plasmas.

1.1.1 Definition of Plasma

In simple terms, a plasma is an ionized ideal gas which is quasineutral and exhibits collective behavior [1]. The following subsections will give precise definition of quasineutrality and collective behavior.

Debye Shielding and Quasineutrality

A key characteristic of plasma is its capability to shield external electric field. Imagine a positive test charge is put into a plasma (Fig. 1.2, ions are neglected from the figure). Suppose there is sufficient amount of electrons in the plasma, and the plasma is cold, meaning that no thermal motions exist, the electric field generated by the ball will be shielded out by the surrounding electron cloud. If the plasma has finite temperature, then

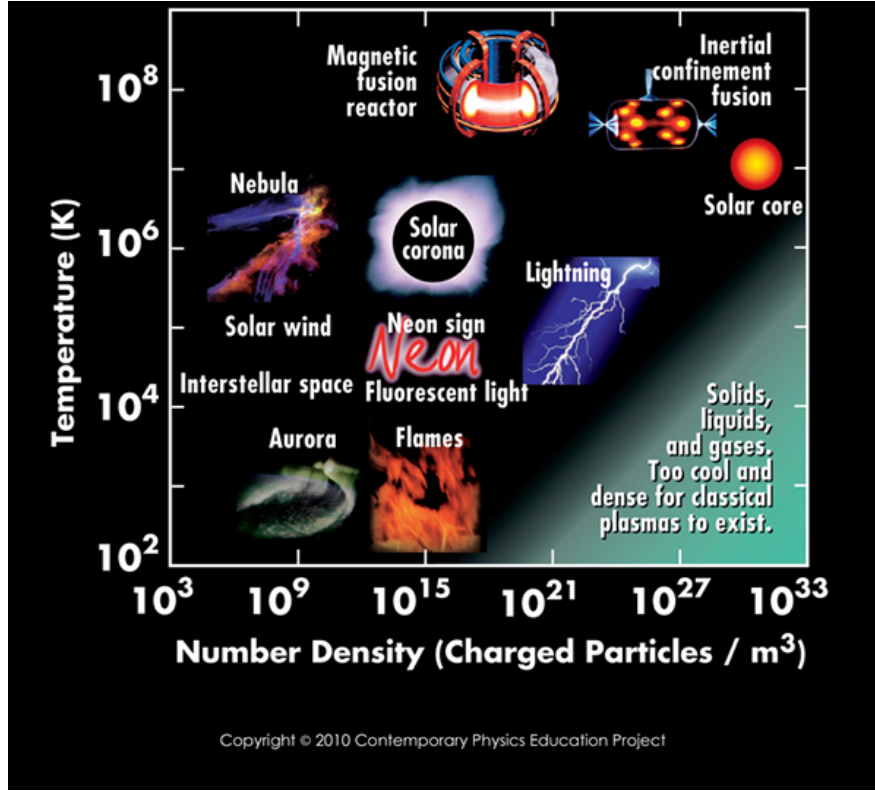


Figure 1.1: Typical plasmas. Adapted from [2].

due to the thermal motions of electrons, the shielding will be incomplete and the edge of the electron cloud will be at the radius where potential energy is approximately equal to the thermal energy KT [1].

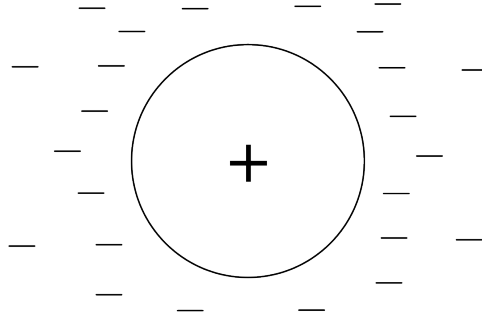


Figure 1.2: Debye shielding. Adapted from [1]. A positive test charge is put into a plasma. Electrons will surround the charge. Ions are neglected from the picture since they are repelled away from the charge.

The Debye length is the thickness of the electron layer around the charge. To find out Debye length, we need to compute the potential near the positive test charge. For simplicity, we assume massless electron, $m/M \rightarrow 0$. This means that the electrons move so fast that the ions can be treated as a static background. That is,

$$n_i = n_0, \quad (1.1)$$

where n_0 is a constant. Meanwhile, it can be proven using Fluid description of plasma that the electron density follows the Boltzmann distribution [1],

$$n_e = n_0 \exp(e\phi/KT_e). \quad (1.2)$$

Now we introduce an external test charge with charge q into the plasma. As a result, the electric potential ϕ is perturbed by an amount of $\delta\phi$. The perturbed charge density of the plasma can be written as,

$$\begin{aligned} \delta\rho &= \delta\rho_{\text{ext}} + e(\delta n_i - \delta n_e) \\ &= q\delta^3(\mathbf{r}) - \frac{e^2 n_0}{KT_e} \delta\phi. \end{aligned} \quad (1.3)$$

There are two parts in the perturbed charge density. The external perturbed charge density $\delta\rho_{\text{ext}}$ and the perturbed charge density in the plasma $e(\delta n_i - \delta n_e)$. The external perturbed charge density is given by a localized point charge q , hence Dirac delta function $\delta^3(\mathbf{r})$ is used. As for the expression for the perturbed charge density in the plasma, we can derive it by Taylor expanding Eq. (1.1) and Eq. (1.2).

The perturbed Poisson's equation now reads,

$$\nabla^2 \delta\phi = -\frac{\delta\rho}{\epsilon_0} = -\frac{q\delta^3\mathbf{r} - e^2 n_0 \delta\phi/KT_e}{\epsilon_0}. \quad (1.4)$$

Rearrange the terms, we obtain

$$\left(\nabla^2 - \frac{e^2 n_0}{\epsilon_0 KT_e} \right) \delta\phi = -\frac{q\delta^3\mathbf{r}}{\epsilon_0}. \quad (1.5)$$

Therefore, the perturbed potential can be written as

$$\delta\phi = \frac{q}{4\pi\epsilon_0 r} \exp\left(-\frac{r}{\lambda_D}\right), \quad (1.6)$$

where λ_D is the symbol for Debye length. It characterizes the thickness of the electron layer near the test charge, and it is defined as

$$\lambda_D = \left(\frac{\epsilon_0 KT_e}{n_0 e^2} \right). \quad (1.7)$$

The potential is shown in Fig. 1.3.

Assuming the system size L is much larger than the Debye length λ_D , this suggests that the electric potential from the test charge $q/4\pi\epsilon_0 r$ is shielded by the electrons and decays exponentially $\exp(-r/\lambda_D)$. Therefore, the plasma stays neutral if it is initially electrically neutral.

A plasma is said to be quasineutral, if a plasma is neutral enough so that we can take $n_i \simeq n_e$ but a small charge imbalance can give rise to potentials of the order of KT/e . In this case, we use the symbol n to denote the common density and call it the plasma density [1].

Plasma Oscillation

Simply speak, the collective behavior of a plasma is mostly governed by the electromagnetic forces rather than the gas dynamics. To quantify this statement, we introduce the concept of plasma oscillation. The

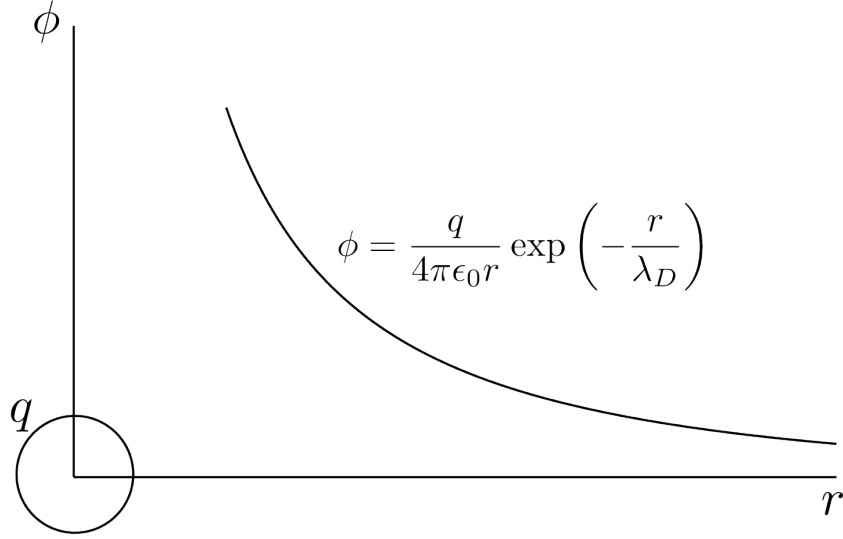


Figure 1.3: Potential distribution near a positive charge in a plasma. The charge is centered at the origin, the potential generated by this positive charge decreases exponentially.

plasma oscillation frequency characterizes the response time of a plasma to an applied electric field. Imagine the ions are too heavy to move, and they form a uniform background. The electrons are pulled (using an applied electric field) to some distance away from the ions (Fig. 1.4) and then release. The electric field will pull the electrons toward the ions, after the electrons pass the ions, the electric field will decelerate them and started to pull them to the other side. The frequency of this oscillation is called plasma frequency,

$$\omega_p = \left(\frac{n_0 e^2}{\epsilon_0 m} \right)^{1/2}. \quad (1.8)$$

Criteria of Plasma

We are now able to give more detailed definition for plasma. According to [1], not all ionized gas can be called plasma, there are three conditions a plasma must satisfy:

1. Debye length is much smaller than the system size, $\lambda_D \ll L$.
2. Collective behavior requires lots of particles in a Debye sphere, $N_D = n \frac{4\pi}{3} \lambda_D^3 \gg 1$.
3. The particles in a ionized gas is governed by electromagnetic forces rather than the collisions, $\omega_p \tau > 1$ where ω_p typical plasma oscillation frequency and τ is the mean free time of collisions between neutral atoms.

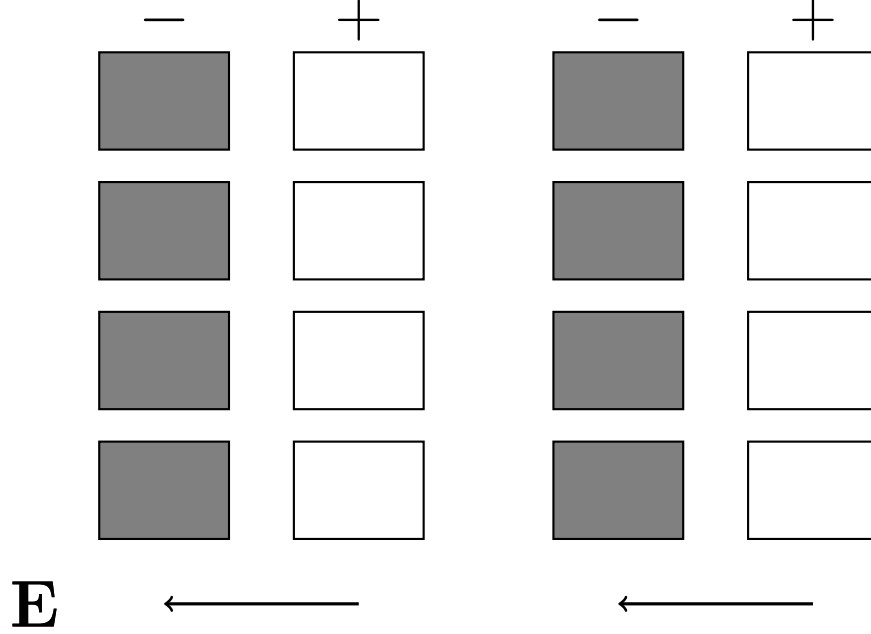


Figure 1.4: Mechanism of plasma oscillations. Adapted from [1]. As the electrons are pulled away from the ions, electric field forms and will pull the electrons back to the equilibrium position. Hence oscillation happens.

1.2 Stability

Magnetic nozzle is one of the most actively researched configurations in plasma propulsion systems, which is being developed for space missions due to their potential for high efficiency and thrust. Understanding and controlling instabilities in the plasma flow within these nozzles is essential for optimizing their performance and achieving efficient propulsion. Investigating instabilities in plasma flow within magnetic nozzles also contributes to our broader understanding of fundamental plasma physics phenomena. For instance, in astrophysics, the solar wind is accelerated by a magnetic mirror configuration similar to that of a magnetic nozzle, suggesting that our methodologies can also be applied to such problems.

1.2.1 Plasma Stability

The stability of plasma refers to its robustness against perturbations. It can be understood as the simple mechanical analogy with a ball on crest / in valley. On the left of Fig. 1.5 shows us a ball in its equilibrium and it is a stable equilibrium. Small perturbations given to the system will not push the ball far away from the equilibrium position, the valley. If friction exists, the ball oscillates with decreasing amplitude and will eventually reach the equilibrium state as time goes to infinity. Hence, the equilibrium is stable. On the right, any small perturbations will cause the ball to fall downhill and will never come back to the initial equilibrium position. Hence this equilibrium is unstable.

The instabilities in plasma can arise from various factors, such as the interaction of particles with elec-

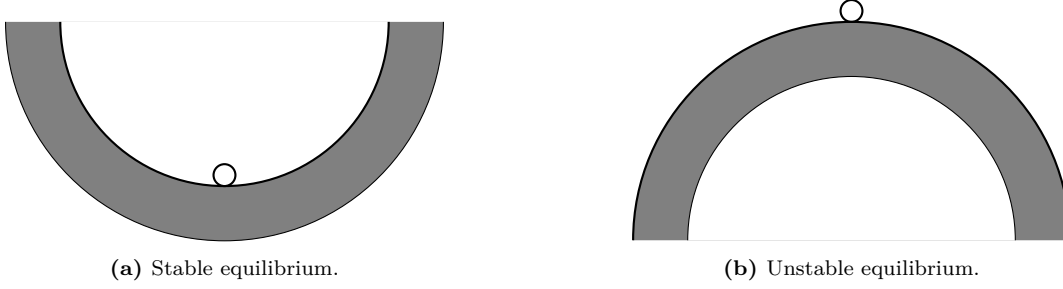


Figure 1.5: Mechanical analogy of various types of equilibrium. Adapted from [1].

tromagnetic fields, collective effects, or the presence of gradients in plasma parameters. A famous example of instability is the two stream instability. The configuration starts with two oppositely traveling beams of ions and electrons. As time evolves, the two beams can no longer stay in its equilibrium state due to the electromagnetic interactions, and chaotic behavior develops as shown in Fig. 1.6. The perturbations gain their energy from the external energy that drives the electron and ion beams.

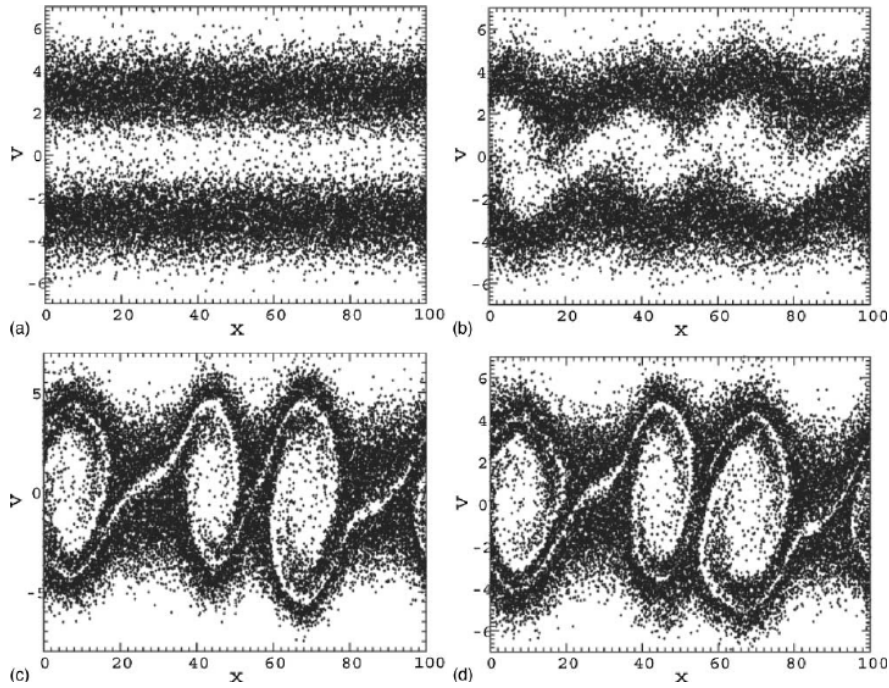


Figure 1.6: Visualization of two-stream instability in the phase space. Each point in the phase space represents location and velocity of a particle. (a) Initially the ion (top cluster) and electron (bottom cluster) flow in opposite direction. (b) The velocity of both flows start to oscillate. (c) Chaotic behavior occurs. (d) The chaotic behavior continues. The perturbations gain their energy from the external energy that drives the beams. Adapted from [3].

1.2.2 Spectral Stability of Partial Differential Equations

In the study of partial differential equations (PDEs), there are two types of stability: structural stability and dynamic stability. The structural stability refers to the robustness of solution against perturbations

in the PDE parameters, while the dynamic stability refers to the robustness of stationary solution against perturbations [4]. We are interested in the dynamic stability. In this subsection, we will describe the process for investigating plasma stability, and explain why we can investigate the dynamic stability by analyzing the spectrum of the linear operator of the corresponding linearized PDE. Hence the name spectral stability. We will discuss the connection between spectral stability and the plasma stability later in this subsection.

In order to investigate the plasma instability, the first step is to state the governing equations for the plasma flow in the magnetic nozzle. The governing equations are time-dependent fluid equations involving the number density n and fluid velocity v of the plasma flow along the central axis of the nozzle,

$$\frac{\partial}{\partial t} \begin{bmatrix} n \\ v \end{bmatrix} + \mathbf{F}(n, v) = \mathbf{0}. \quad (1.9)$$

This PDE system has two first-order PDEs: conservation of density, Eq. (2.27), and conservation of momentum, Eq. (2.28). The term $\mathbf{F}(n, v)$ stands for the terms other than time derivatives in these conservation laws,

$$\mathbf{F}(n, v) = \begin{bmatrix} n\partial_z v + v\partial_z n - nv\partial_z B/B \\ v\partial_z v + \partial_z n/n \end{bmatrix}. \quad (1.10)$$

Detail derivation of the conservation laws will be given in Sec. 2.2.

Following this we find the equilibrium state (stationary solution) to the above PDE system, Eq. (1.9). In other words, we find n_0 and v_0 such that $\mathbf{F}(n_0, v_0) = \mathbf{0}$. The expression of equilibrium velocity v_0 is given by Eq. (2.33) and it can be found in Sec. 2.3. The details of derivation will be explained in Sec. 2.3. As for n_0 , it is not required to obtain its expression because we are able to reduce the linearized first-order PDE system Eq. (1.9) into a second-order PDE by eliminating the density n .

Now we are in a stage ready to investigate the dynamic instability of the problem. The system will be given small spatial perturbations, they serve as small fluctuations on number density and velocity, $\tilde{n}(z)$ and $\tilde{v}(z)$. All variables n and v in the governing equations will be substituted by perturbed quantities, $n_0 + \tilde{n}$ and $v_0 + \tilde{v}$. The PDE system Eq. (1.9) now becomes,

$$\underbrace{\frac{\partial}{\partial t} \begin{bmatrix} \tilde{n} \\ \tilde{v} \end{bmatrix} + d\mathbf{F}(n_0, v_0) \begin{bmatrix} \tilde{n} \\ \tilde{v} \end{bmatrix}}_{\text{linear terms}} + \underbrace{\mathbf{F}(n_0 + \tilde{n}, v_0 + \tilde{v}) - d\mathbf{F}(n_0, v_0) \begin{bmatrix} \tilde{n} \\ \tilde{v} \end{bmatrix}}_{\text{non-linear terms}} = \mathbf{0}, \quad (1.11)$$

where the Jacobian matrix $d\mathbf{F}$ is given by,

$$d\mathbf{F}(n_0, v_0) = \begin{bmatrix} v_0(\partial_z - \partial_z n_0/n_0) & n_0\partial_z + \partial_z n_0 - n_0\partial_z B/B \\ v_0(\partial_z - \partial_z n_0/n_0) & v_0\partial_z + \partial_z v_0 \end{bmatrix}. \quad (1.12)$$

Since \tilde{n} and \tilde{v} are small, we expect the higher order mixed terms such as $\tilde{n}\tilde{v}$, $\tilde{n}\partial_z\tilde{v}$, $\tilde{v}\partial_z\tilde{n}$ are negligible comparing to the linear terms. So we drop the non-linear terms. Now we obtain the so-called linearized governing equations, they are the linearized conservation of density, Eq. (3.1) and the linearized conservation of momentum, Eq. (3.2), respectively.

Since we are dealing with linear operators, let the perturbations take the form of exponential $\exp(-i\omega t)$. This indicates that physically the perturbations are oscillating with frequency ω in time. Any time derivative on the perturbations in the linearized governing equations simply becomes $\partial_t \rightarrow -i\omega$. Now we obtain equations involving perturbations, \tilde{n} and \tilde{v} , and their spatial derivatives, and ω . Reducing the number of equations by eliminating the density \tilde{n} , we obtain Eq. (3.6).

The problem of investigating the plasma instability becomes the problem of finding the eigenvalues, ω , of Eq. (3.6) under different boundary conditions. The connection between the eigenvalue ω and the plasma instability is clear: The oscillation frequency ω is a complex number. If the imaginary part of the temporal frequency is greater than zero, i.e. $\text{Im}(\omega) > 0$, then the system is unstable. This is because the perturbation grows exponentially $\exp(\text{Im}(\omega)t)$ in time. On the other hand, if the imaginary part of the temporal frequency is less than or equal to zero, $\text{Im}(\omega) \leq 0$, then the system is said to be stable. Since the perturbations will not be growing, $\text{Im}(\omega) = 0$, or even damped, $\text{Im}(\omega) < 0$.

We will devote the rest of the chapters to develop numerical methods for solving the eigenvalue problem Eq. (3.6). To be more specific, the spectral methods will be used to obtain eigenvalues for subsonic and supersonic velocity profiles, and shooting method will be used to get eigenvalues when velocity profile v_0 is accelerating.

It is important to clarify that the term "spectral" in spectral methods refers to the use of orthogonal polynomials to transform the problem into the frequency domain. On the other hand, "spectral" in spectral stability pertains to the eigenvalues of the governing equations. In this thesis, the "spectral" in spectral methods is unrelated to the "spectral" in spectral stability.

1.3 Magnetic Nozzle

In this thesis, we are going to deal with plasma flow in magnetic nozzle. A magnetic nozzle is a device that uses a magnetic field to shape and control the flow of charged particles in a plasma propulsion system, see Fig. 1.7. By employing magnetic mirrors, the magnetic nozzle can efficiently direct and accelerate the plasma particles, generating thrust for propulsion. The magnetic field in the nozzle helps collimate and focus the plasma exhaust, increasing its velocity and enhancing the performance of the propulsion system.

1.3.1 Magnetic Field in Magnetic Nozzle

The magnetic nozzle by its nature is 3-dimensional. We assume the magnetic field is axis-symmetric, then the radial magnetic field and axial magnetic field are constraint by divergence-free condition,

$$\nabla \cdot \mathbf{B} = \frac{1}{r} \frac{\partial(rB_r)}{\partial r} + \frac{\partial B_z}{\partial z} = 0. \quad (1.13)$$

Since we are interested in the plasma flow near the central axis of the nozzle, with paraxial approximation taken, the derivative along the magnetic field line $\nabla_{\parallel} = \partial/\partial z$ when near the central axis [5]. Hence, in this

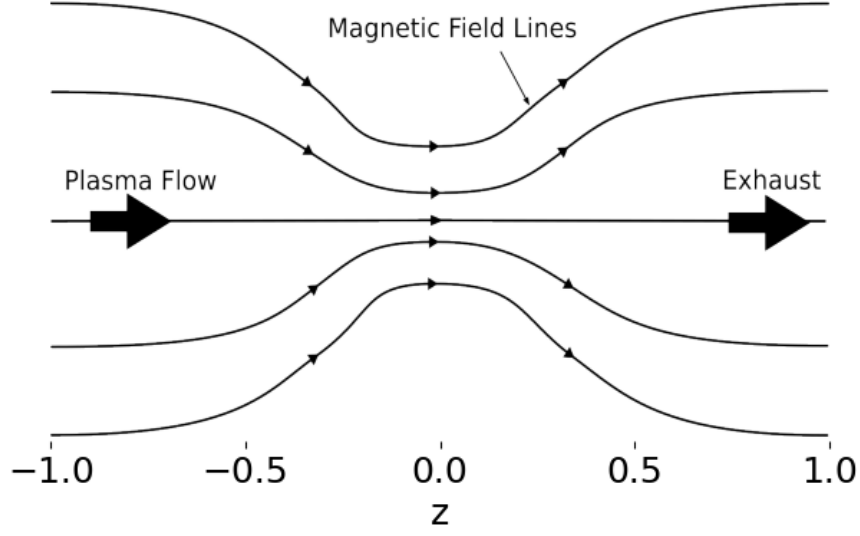


Figure 1.7: A simplified example of a magnetic nozzle configuration. On the left ($z = -1$) is the entrance of the nozzle. The plasma flows into the nozzle from the left and will be accelerated and finally exhaust through the exit on the right ($z = 1$). The magnetic field lines are shaped in such a way that it forms a magnetic mirror configuration. Plasma flow with specific subsonic speed at the entrance will be accelerated to supersonic speed.

thesis we will treat the flow in magnetic nozzle as a 1-dimensional problem. In this subsection we will define the axial magnetic field, B_z . Then the radial magnetic field, B_r , is given by the divergence-free condition, Eq. (1.13). The axial magnetic field along the central axis is modeled as

$$B_z(z) = B_0 \left[1 + R \exp\left(-\left(\frac{z}{\delta}\right)^2\right) \right], \quad -1 \leq z \leq 1, \quad (1.14)$$

where R is a non-negative parameter that controls the spread of the plasma flow at the exit. On the other hand, δ , a positive parameter that determines the spread of the magnetic field. Larger the δ , flatter the magnetic field. An example of magnetic field is shown in Fig. 1.8.

The magnetic field has its maximum at the center and minimum at the edge, this is a magnetic mirror configuration. This magnetic mirror configuration traps the charged particles and only particles with certain velocity can penetrate the nozzle throat, in other words escapes the mirror. We use mirror ratio to characterize the confinement strength of a magnetic mirror configuration. It is defined as

$$r_{\text{mirror}} = \frac{B_{\text{max}}}{B_{\text{min}}} = \frac{1 + R}{1 + R \exp(-1/\delta^2)}. \quad (1.15)$$

Only particles traveling with pitch angle θ (angle between velocity and z -axis) less than θ_m can pass through the mirror and the angle θ_m is defined by [1]

$$\sin^2 \theta_m = \frac{1}{r_{\text{mirror}}}. \quad (1.16)$$

This defines a cone-shaped region, called loss cone, centered at the origin of the velocity space. Larger the mirror ratio, smaller the loss cone and hence better plasma confinement within the mirror. Smaller the mirror ratio, worse the confinement. Therefore, only a portion of plasma flow, i.e. particles within this loss cone, can go through the magnetic nozzle and other particles will be reflected by the mirror configuration.

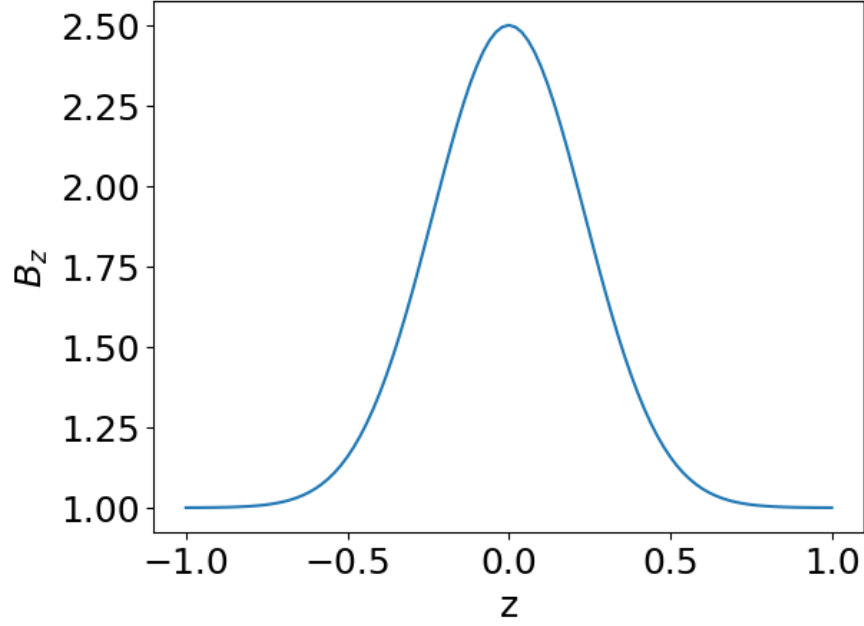


Figure 1.8: This is the magnetic field in nozzle with $R = 1.5$, and the spread of magnetic field, $\delta = 0.1/0.3 = 0.3$.

1.3.2 Velocity Profiles of Plasma Flow in Magnetic Nozzle

In Sec. 2.3 we will derive the expressions for the velocity profiles, Eq. (2.33), and Fig. 2.4 shows these profiles. In summary, the analytical solution gives 4 different kinds of velocity profiles,

- Subsonic profile: Plasma flow enters and exits the nozzle with subsonic speed. Every point on this profile is subsonic.
- Supersonic profile: Plasma flow enters and exits the nozzle with supersonic speed. Every point on this profile is supersonic.
- Accelerating profile: Plasma flow enters the nozzle with subsonic speed and exits the nozzle with supersonic speed. Points before the nozzle throat are subsonic, and the flow reaches ion sound speed at the nozzle throat, then the flow is supersonic after the nozzle throat.
- Decelerating profile: Plasma flow enters the nozzle with supersonic speed and exits the nozzle with subsonic speed. Similar to the accelerating profile, but the velocity is decreasing.

1.4 Flow in Similar Configuration: Bondi-Parker Flow

Consider a massive celestial object in the space. This celestial object will attract matter in the space because it is massive. Hence, creating an accretion flow. If the celestial object is a star, it can also eject matter into space. Solar wind is an example to this since it is a stream of charged particles, primarily electrons

and protons, flowing outward from the Sun. Bondi derived a steady-state solution for accretion flow which is governed by Bernoulli's equation in spherical symmetry around a point mass in 1952. Hence, the inward accretion flow is also called Bondi flow. Then Parker solved a similar problem but with outward wind in 1958. Then the outward wind is given the name, Parker flow [6–8]. The Bondi and Parker flow (also called Bondi-Parker flow) is similar to that in magnetic nozzle. It is interesting to compare the two configurations.

If we compare the velocity profiles, shown in Fig. 1.9, for Bondi-Parker flow and the flow in magnetic nozzle. We found they are similar. The Bondi-Parker flow can also be grouped into the following types: subsonic, supersonic, and transonic (accelerating and decelerating). In subsonic profiles, every point on the curve represents a speed that is slower than the ion sound speed, while in supersonic profiles, every point on the curve corresponds to a speed that exceeds the ion sound speed. Lastly, there are two different transonic profiles: accelerating profile and decelerating profile. The accelerating profile describes the accelerating plasma flow which is at subsonic speed at the mass point, e.g., a star, and is accelerated to supersonic speed far away. The decelerating profile shows that a plasma flow ejected supersonically from a mass point and then decelerated to subsonic speed far away.

The velocity profiles of one-dimensional, spherically symmetric, stationary isothermal Parker flow neglecting self-gravity can be expressed using Lambert W function (will be discussed in Sec. 2.3),

$$v(r) = \sqrt{-\frac{KT}{m} W_k \left[-\left(\frac{r}{r_c}\right)^2 \exp \left[4 \left(1 - \frac{r_c}{r} \right) - 1 \right] \right]}, \quad k = 0, -1, \quad (1.17)$$

where r stands for the distance measured from the center of the mass point, e.g., star. The position $r_c = GMm/2KT$ is the critical position and the velocity at this point is exactly the sonic speed $v(r_c) = \sqrt{KT/m}$, where M is the mass of the mass point, m is the mass of a single particle in the flow, and T is the temperature of the flow. The Bondi flow is simply $-v(r)$ since it is accretion flow, the particles are flowing inwardly towards the mass point.

As we can see the expression of velocity profile for Bondi-Parker flow is similar to that of the magnetic nozzle, Eq. (2.33). The expression is governed by the Lambert W function. Similarly, the $k = 0$ branch corresponds to the subsonic part in the velocity profile, and the $k = -1$ branch corresponds to the supersonic part of the profile.

The stability of the Bondi-Parker flow has been extensively studied in various works [6–12], but these studies only serve as an analogy of our problem due to the fact that the mirror effect in Parker flow is created by the combination of expansion and gravity, rather than a magnetic mirror. In this thesis, we adapted the numerical scheme presented in [12], with modification to use spectral methods. The approach using spectral methods is general enough that many eigenvalue problems could use.

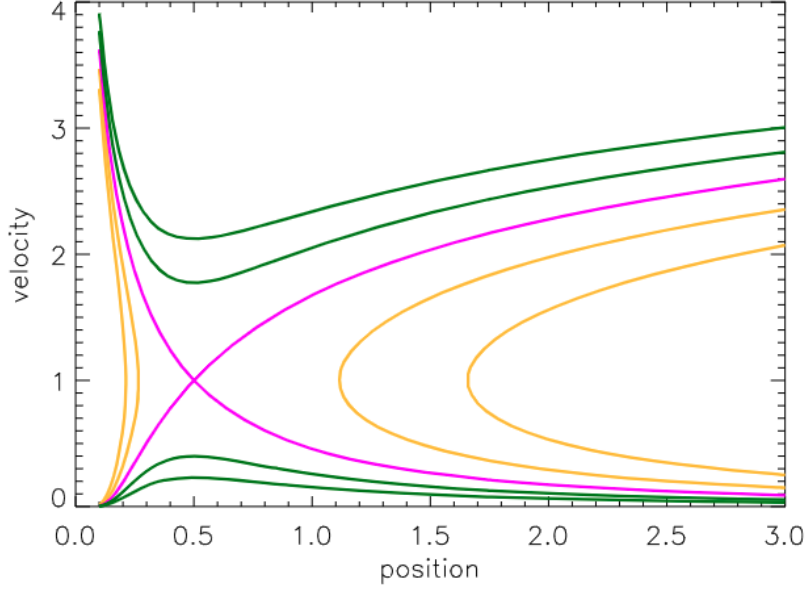


Figure 1.9: Representative trajectories of the steady-state BP flow in non-dimensional units. The velocities are shown in absolute values. Adapted from [8]. The upward pink line represents an accelerating flow, it accelerates from subsonic to supersonic. The downward pink line represents a decelerating flow. The green lines below the pink lines represent subsonic flows, and the green lines above represent supersonic flows. Orange lines are physically impossible scenarios. If the sign of the velocity is positive, then it is an outward (Parker) flow, otherwise it is an inward (Bondi) flow.

1.5 Goals of this Thesis

Fusion is considered the next-generation source of a clean, safe and abundant energy providing an opportunity to address climate change problems. A new fusion industry has appeared in the last decade fueled by over \$4 billion of private investments, with the second world largest and several other smaller companies founded in Canada. To achieve controlled fusion, one of the key science problems is to understand and learn to predict the non-linear behavior of plasma due to waves and instabilities. The general objective of my research is to understand the behavior and learn to control the turbulent flows of plasmas in magnetically controlled fusion system, in particular, open magnetic mirrors. I study the instabilities of the flow in a magnetic mirror configuration under different boundary conditions which is an open question and is under debate in application to fusion systems and also related to the solar wind flows.

The general objective of this research is to understand the instability of the flow in a magnetic nozzle. Plasma confined by the magnetic field is typically far from the state of the thermodynamic equilibrium which makes it unstable. In this project, we would like to investigate the stability of plasma flow in a magnetic nozzle under different boundary conditions. Understanding the instabilities of plasma flow in a magnetic mirror configuration is important in applications such as the expanding magnetic divertors in controlled fusion and electric propulsion [13, 14].

In the following thesis, particle and fluid descriptions of plasma will be reviewed in Chap. 2. Governing

equations will be derived, linearized, and formulated as an eigenvalue problem in Chap. 3. In Chap. 4, spectral methods, spectral-collocation and spectral-Galerkin methods, for solving eigenvalue problem will be introduced. Moreover, spectral pollution and the filtering techniques will as also be investigated. If the plasma flow in the magnetic nozzle is transonic, the existence of singularity at the nozzle throat prevents the use the spectral methods, therefore we will formulate the problem to the form suitable for applying shooting method. In Chap. 5 we will discuss the existence of the singularity and then extract the regular solutions using Frobenius method. After this, we will apply shooting method to the problem and investigate the instabilities. Summary of the results and limitations of the methods are discussed in Chap. 6.

2 Basic Fluid Equations and Plasma Flow in Magnetic Nozzle

In this chapter, we are going to state the governing equations for the plasma flow in magnetic nozzle. To do this we first start with kinetic description of plasma. By examining the single particle motion along the magnetic field, we make a very important observation, that is magnetic field lines guide the motion of charged particles in plasma. Subsequently we discuss the kinetic description of plasma. Following this, we derive the fluid description of plasma from the kinetic description. The fact that fluid velocity follows the magnetic field line $\mathbf{v} = v\mathbf{B}/B$ will be used to simplify the equations. After this, we establish the governing equations for flow in the magnetic nozzle.

2.1 Kinetic Theory

2.1.1 Single Particle Motion in Uniform Magnetic and Electric Fields

Plasma consists of charged particles, and is governed by electromagnetic force. This subsection gives a description of single particle motion with the presence of uniform magnetic and electric fields. This gives us intuition of how the particles move in a magnetic nozzle. Since the particle motion is governed by Lorentz force, the equation of motion of a charged particle is given by

$$m \frac{d\mathbf{v}_p}{dt} = q(\mathbf{E} + \mathbf{v}_p \times \mathbf{B}), \quad (2.1)$$

where m is the mass of charged particle, q is its electric charge, and \mathbf{v}_p is the particle's velocity.

No Electric Field

Consider a uniform magnetic field pointing in z-direction, $\mathbf{B} = B\hat{\mathbf{z}}$, and no electric field for now. Since the magnetic force is perpendicular to both \mathbf{v}_p and \mathbf{B} , we can separate the equation of motion into two directions,

$$\begin{aligned} m \frac{d\mathbf{v}_{\parallel}}{dt} &= 0 \\ m \frac{d\mathbf{v}_{\perp}}{dt} &= q\mathbf{v}_{\perp} \times \mathbf{B}, \end{aligned} \quad (2.2)$$

where \mathbf{v}_{\parallel} denotes the velocity along the magnetic field line, in this case $v_{\parallel} = v_z$, and \mathbf{v}_{\perp} is the velocity perpendicular to the magnetic field, in this case $\mathbf{v}_{\perp} = v_x\hat{x} + v_y\hat{y}$. Solving these equations with initial

condition $\mathbf{v}_p|_{t=0} = v_{0x}\hat{x} + v_{0y}\hat{y} + v_{0z}\hat{z}$ we get

$$\begin{aligned} v_x &= v_{0\perp} e^{i\omega_c t} \\ v_y &= \pm i v_{0\perp} e^{i\omega_c t} \\ v_z &= v_{0z}, \end{aligned} \tag{2.3}$$

where $v_{0\perp} = \sqrt{v_{0x}^2 + v_{0y}^2}$ is the initial speed in the plane perpendicular to the magnetic field, and $\omega_c \equiv |q|B/m$ is called the Larmor frequency. In this way, we see that the charged particle is doing circular motion in the $x - y$ plane with Larmor frequency ω_c . On the other hand, the particle is flowing freely in \hat{z} direction since there is no force acting on the charged particle along the magnetic field line. The charged particle is doing helical motion along the magnetic field line as shown in Fig. 2.1. If we integrate the velocities with respect to time we will see the radius of the gyration is a constant, $r_L \equiv mv_{\perp}/|q|B$, it is called Larmor radius.

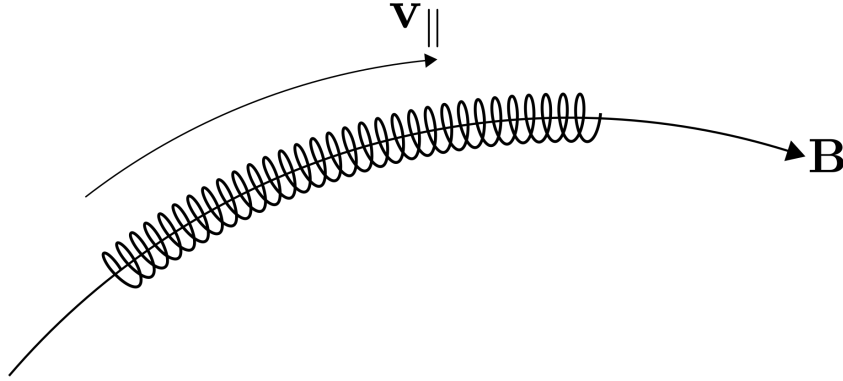


Figure 2.1: A charged particle gyrates about the magnetic field line. The velocity along the field line is \mathbf{v}_{\parallel} and the Larmor frequency is $\omega_c = |q|B/m$, and the Larmor radius is $r_L = mv_{\perp}/|q|B$. Moreover, for static, nonuniform magnetic field, the charged particle will stay on the same magnetic field line as it gyrates.

Finite Electric Field

With the presence of uniform electric field $\mathbf{E} = E_x\hat{x} + E_y\hat{y} + E_z\hat{z}$, the solution to Eq. (2.1) becomes

$$\begin{aligned} v_x &= v_{0\perp} e^{i\omega_c t} + \frac{E_y}{B} \\ v_y &= \pm i v_{0\perp} e^{i\omega_c t} - \frac{E_x}{B} \\ v_z &= v_{0z} + \frac{qE_z}{m}t. \end{aligned} \tag{2.4}$$

In the direction along the magnetic field, electrostatic force is acting on the particle causing it to accelerate / decelerate with constant acceleration qE_z/m . In the direction perpendicular to magnetic field, the Larmor radius is still $r_L = m v_{\perp} / |q|B$ but the particle's guiding center drifts with velocity

$$\mathbf{v}_{\mathbf{E} \times \mathbf{B}} = \frac{\mathbf{E} \times \mathbf{B}}{B^2} = \frac{E_y}{B} \hat{x} - \frac{E_x}{B} \hat{y}. \tag{2.5}$$

This is so-called the $\mathbf{E} \times \mathbf{B}$ drift.

Imagine a cylinder shape magnetic nozzle with externally applied magnetic field, the magnetic field is as described in Sec. 1.3.1. The particles will move along the magnetic field lines. Due to high mobility of electrons, they move faster than ions, this creates electric field and will accelerate ions in the nozzle (more details will be discussed in Sec. 2.2). By symmetry, if there is electric field in the plane perpendicular to \mathbf{B} field, it will be pointing radially, $\mathbf{E}_\perp = E_\perp \cos \theta \hat{x} + E_\perp \sin \theta \hat{y}$. According to the above discussion, the $\mathbf{E} \times \mathbf{B}$ drift, $\mathbf{v}_{\mathbf{E} \times \mathbf{B}} = E_\perp / B (\sin \theta \hat{x} - \cos \theta \hat{y})$, will be in $\hat{\theta}$ direction. Meaning that in magnetic nozzle, the particles have two gyrating motions: one is the small scale Larmor gyration, and the other one is the larger scale $\mathbf{E} \times \mathbf{B}$ drift in $\hat{\theta}$ direction. In this thesis, we are interested in the flow near the central axis, therefore the larger scale drift will be ignored.

2.1.2 Adiabatic Invariant - Magnetic Moment

For completeness, we introduce the so-called magnetic moment, an adiabatic invariants. We will show that most particles will be trapped in magnetic mirror.

In classical mechanics, the action integral $\oint p dq$ taken over a period of a periodic motion is a constant. Here p and q are generalized momentum and coordinate. In single particle motion along magnetic field line, one obvious periodic motion is the Larmor gyration. Take p to be the angular momentum $mv_\perp r$ and q to be the angular coordinate θ , the action integral becomes

$$\oint p dq = \oint mv_\perp r_L d\theta = 2\pi r_L mv_\perp = 2\pi \frac{mv_\perp^2}{\omega_c} = 4\pi \frac{m}{|q|} \left(\frac{mv_\perp^2}{2B} \right). \quad (2.6)$$

The magnetic moment is defined as [1],

$$\mu = \frac{mv_\perp^2}{2B}. \quad (2.7)$$

We see that the magnetic moment μ is constant. If a particle is moving in a magnetic mirror, then due to conservation of magnetic moment (and energy), particles will be reflected at points where magnetic field strength is large. These locations are called turning points and is shown in Fig. 2.2. Thus only a portion of particles can escape from the magnetic mirror. To be more specific, only particles traveling in the loss cone of the magnetic mirror can pass through, the pitch angle of the loss cone was defined by Eq. (1.16).

2.1.3 From Kinetic Theory to Fluid Description

Although the previous treatment is useful for single particle, to describe the collective behavior of a large amount of particles, we need to do that in the framework of kinetic theory. In kinetic theory, the charged particles in plasma obey a certain velocity distribution function,

$$f(\mathbf{x}, \mathbf{v}_p, t). \quad (2.8)$$

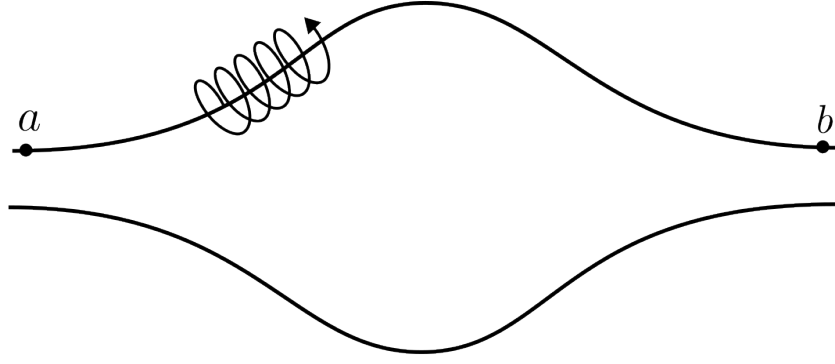


Figure 2.2: A particle bouncing between turning points a and b in a magnetic mirror. Adapted from [1].

The number of particles per m^3 at position \mathbf{x} and time t with velocity components in the cell bounded by \mathbf{v} and $\mathbf{v} + d\mathbf{v}$ is

$$f(\mathbf{x}, \mathbf{v}_p, t) d^3 \mathbf{v}_p. \quad (2.9)$$

Suppose a collisionless plasma in 3-dimensional space is at thermal equilibrium, then the particles can be characterized by Maxwell-Boltzmann distribution,

$$f_M(\mathbf{x}, \mathbf{v}_p, t) = \frac{n(\mathbf{x}, t)}{(\pi v_{th}^2)^{3/2}} \exp\left(-\left(\frac{v}{v_{th}}\right)^2\right),$$

where $n(\mathbf{x}, t)$ is number density of the particles, $v_{th} = \sqrt{2k_B T/m}$ is the thermal velocity, and $v = \sqrt{v_x^2 + v_y^2 + v_z^2}$.

The moments of the distribution function are suitable macroscopic properties of the plasma. For example, the plasma number density and momentum can be viewed as

$$\begin{aligned} n(\mathbf{x}, t) &= \int_{\mathbb{R}^3} f(\mathbf{x}, \mathbf{v}_p, t) d^3 \mathbf{v}_p \\ n\mathbf{v}(\mathbf{x}, t) &= \int_{\mathbb{R}^3} \mathbf{v}_p f(\mathbf{x}, \mathbf{v}_p, t) d^3 \mathbf{v}_p, \end{aligned} \quad (2.10)$$

where \mathbf{v} without the subscript p is the fluid velocity of the plasma flow. It is the bulk velocity of the plasma. The charged particles flow along the magnetic field line, it is intuitive to think of \mathbf{v} as the plasma flow velocity along the magnetic field line.

In this thesis we assume collisionless plasma. The distribution function f in a collisionless plasma satisfies the so-called collisionless Vlasov equation, $d/dt f(\mathbf{x}, \mathbf{v}, t) = 0$. Expand it explicitly, it is

$$\frac{\partial f}{\partial t} + \mathbf{v} \cdot \frac{\partial f}{\partial \mathbf{x}} + \frac{q}{m} (\mathbf{E} + \mathbf{v} \times \mathbf{B}) \cdot \frac{\partial f}{\partial \mathbf{v}} = 0, \quad (2.11)$$

where $q(\mathbf{E} + \mathbf{v} \times \mathbf{B})$ is the Lorentz force experience by the species.

Integrate both sides with respect to volume element in velocity space, $d^3 \mathbf{v}$, we get the conservation of density.

$$\frac{\partial n}{\partial t} + \nabla \cdot (n\mathbf{v}) = 0. \quad (2.12)$$

If we multiply \mathbf{v} on both sides and integrate with respect to $d^3\mathbf{v}$, we get the conservation of momentum,

$$mn \left[\frac{\partial \mathbf{v}}{\partial t} + (\mathbf{v} \cdot \nabla) \mathbf{v} \right] = qn(\mathbf{E} + \mathbf{v} \times \mathbf{B}) - \nabla \cdot \mathbf{P}, \quad (2.13)$$

where $\mathbf{P} \equiv mn \overline{\mathbf{v}_{th} \mathbf{v}_{th}}$ is the stress tensor, the bar represents average over velocity space with distribution function $f(\mathbf{x}, \mathbf{v}_p, t)$, is the stress tensor. Here we assume the distribution function is isotropic Maxwellian, then it is easy to see that

$$\mathbf{P} = \begin{bmatrix} p & 0 & 0 \\ 0 & p & 0 \\ 0 & 0 & p \end{bmatrix}, \quad (2.14)$$

where the isotropic pressure is defined by $p = mn \overline{v_{th,x}^2}$ where $v_{th,x}$ is random thermal velocity in x direction.

$$mn \left[\frac{\partial \mathbf{v}}{\partial t} + (\mathbf{v} \cdot \nabla) \mathbf{v} \right] = qn(\mathbf{E} + \mathbf{v} \times \mathbf{B}) - \nabla p \quad (2.15)$$

As we can see the fluid description only depends on the macroscopic properties of plasma, such as the fluid velocity along the magnetic field line \mathbf{v} , number density n , and pressure p of the plasma. This simplifies the problem.

2.2 Equation of Motion of the Plasma Flow in Nozzle

In this section, we will derive the governing equations of the quasineutral plasma flow with cold magnetic ions in magnetic nozzle under paraxial approximation.

Starting from the conservation of number density,

$$\frac{\partial n}{\partial t} + \nabla \cdot (n\mathbf{v}) = 0. \quad (2.16)$$

Since ions carry most of the mass and momentum in the plasma, their velocity is more representative of the bulk flow of the plasma. Electrons, on the other hand, have much smaller mass and are highly mobile due to their low inertia, but they contribute less to the overall momentum of the flow. As we discussed in the Sec. 2.1.1, the charged particles are doing helical motions along the magnetic field lines. Hence, we take the fluid velocity as the ion velocity along the magnetic field lines

$$\mathbf{v} = v\mathbf{B}/B. \quad (2.17)$$

By expanding the divergence term $\nabla \cdot (n\mathbf{v})$, and using the divergence free condition $\nabla \cdot \mathbf{B} = 0$, we have

$$\frac{\partial n}{\partial t} + \mathbf{B} \cdot \nabla \left(\frac{nv}{B} \right) = 0. \quad (2.18)$$

Using the paraxial approximation, $\nabla_{\parallel} = \partial_z \hat{z}$. We obtain the conservation of density for the magnetic nozzle,

$$\frac{\partial n}{\partial t} + B \frac{\partial}{\partial z} \left(\frac{nv}{B} \right) = 0. \quad (2.19)$$

The conservation of momentum for ions and electrons are

$$m_i n \left[\frac{\partial \mathbf{v}}{\partial t} + (\mathbf{v} \cdot \nabla) \mathbf{v} \right] = en(\mathbf{E} + \mathbf{v} \times \mathbf{B}) \quad (2.20)$$

$$m_e n \left[\frac{\partial \mathbf{v}}{\partial t} + (\mathbf{v} \cdot \nabla) \mathbf{v} \right] = -en(\mathbf{E} + \mathbf{v} \times \mathbf{B}) - \nabla p_e, \quad (2.21)$$

where p_e is the electron pressure, and cold ions were assumed. There are some simplifications, first is that the term $\mathbf{v} \times \mathbf{B} = 0$ due to the fact that fluid velocity is along \mathbf{B} . Secondly, $m_e n \frac{d\mathbf{v}}{dt} \simeq 0$ due to small electron mass. Hence, the above two equations becomes,

$$m_i n \left[\frac{\partial v}{\partial t} + v \frac{\partial v}{\partial z} \right] = en E_{\parallel} \quad (2.22)$$

$$0 = -en E_{\parallel} - \frac{\partial p_e}{\partial z}. \quad (2.23)$$

Adding these two equations we obtain

$$\frac{\partial v}{\partial t} + v \frac{\partial v}{\partial z} = -\frac{1}{m_i n} \frac{\partial p_e}{\partial z}. \quad (2.24)$$

Assume isothermal, then the electron pressure, also called the equation of state, is

$$p_e = n K T_e. \quad (2.25)$$

We can make this assumption due to the fact the electrons are so mobile that their heat conductivity is almost infinite [1].

Therefore, we have

$$\frac{\partial v}{\partial t} + v \frac{\partial v}{\partial z} = -c_s^2 \frac{1}{n} \frac{\partial n}{\partial z}, \quad (2.26)$$

where $c_s^2 = K T_e / m_i$ is the square of ion sound speed. Since we assumed isothermal electrons, so ion sound speed is a global constant.

Therefore, the dynamics of the plasma flow in magnetic nozzle can be characterized by the conservation of density and momentum,

$$\begin{aligned} \frac{\partial n}{\partial t} + B \frac{\partial}{\partial z} \left(\frac{nv}{B} \right) &= 0 \\ \frac{\partial v}{\partial t} + v \frac{\partial v}{\partial z} &= -c_s^2 \frac{1}{n} \frac{\partial n}{\partial z}. \end{aligned}$$

The magnetic field profile was discussed in Sec.1.3.1.

From the above derivation, it is clear that due to finite temperature and high mobility of the electrons, they establish the electric field to accelerate the cold magnetized ions in the nozzle. The thermal energy of the electrons are converted to kinetic energy of ions in this setup.

For convenience, we nondimensionalize the governing equations by normalizing the velocity to c_s ; i.e., $v \mapsto v/c_s$. The unit of velocity can be written 1 or Mach. z to system length L , $z \mapsto z/L$ and time $t \mapsto c_s t/L$. The governing equations become

$$\frac{\partial n}{\partial t} + n \frac{\partial v}{\partial z} + v \frac{\partial n}{\partial z} - nv \frac{\partial_z B}{B} = 0 \quad (2.27)$$

$$n \frac{\partial v}{\partial t} + nv \frac{\partial v}{\partial z} = -\frac{\partial n}{\partial z}. \quad (2.28)$$

In the later thesis, we will refer the governing equations to Eq. (2.27), (2.28) without mentioning the nondimensionalization.

2.3 Plasma Flow in the Equilibrium

In this research, we are interested in the stability of such plasma flow in the nozzle at equilibrium. Hence, in this section we will derive the velocity profile of plasma flow in steady state.

2.3.1 Velocity Profiles

Let's denote n_0 and v_0 as equilibrium density and equilibrium velocity, respectively. Since they are stationary (time independent) solutions to the governing equations Eq. (2.27), (2.28), they satisfy the so-called equilibrium condition (nondimensionalized),

$$\frac{\partial}{\partial z} \left(\frac{n_0 v_0}{B} \right) = 0 \quad (2.29)$$

$$v_0 \frac{\partial v_0}{\partial z} = -\frac{1}{n_0} \frac{\partial n_0}{\partial z}. \quad (2.30)$$

In this section we will solve the equilibrium velocity profile, v_0 , from the nondimensionalized equilibrium condition, Eq. (2.29) and Eq. (2.30). We start by substituting $\frac{1}{n_0} \partial n_0 / \partial z$ into Eq. (2.29), then it becomes

$$(v_0^2 - 1) \frac{\partial v_0}{\partial z} = -\frac{v_0}{B} \frac{\partial B}{\partial z}. \quad (2.31)$$

Notice that there is a singularity at $v_0 = 1$, the sonic speed. Later we will devote an entire Chap. 5 to discuss the treatment for solving eigenvalues involving this singularity.

We can solve the equation by separating the variables, i.e. v_0 on one side and B on the other side of the equal sign. Then integrate equation with respect to z and use the conditions at midpoint $B(0) = B_m, v_0(0) = v_m$ we get

$$v_0^2 e^{-v_0^2} = \frac{B^2}{B_m^2} v_m^2 e^{-v_m^2}. \quad (2.32)$$

In order to express v_0 as a function spatial coordinate z , we introduce a special function called Lambert W function.

Definition 1. The Lambert W function is a function, $W(x)$, such that $ye^y = x$ holds, where $x, y \in \mathbb{R}$.

Lambert W function has two real branches, $W_0(x)$ the principal branch and the branch $W_{-1}(x)$. They are drawn on Fig. 2.3. The principal branch is the upper part of relation (blue curve) in the figure, it is defined on $[-1/e, \infty)$ and has range $[-1, \infty)$. The other real branch is the bottom part of the relation (orange curve), and its domain is $[-1/e, 0)$ and range is $(-\infty, -1]$. The point $(-1/e, -1)$ satisfies the equation $ye^y = x$ therefore this point is on the graph of $W(x)$, yet the derivative of $W(x)$ at $-1/e$ is undefined.

We can now express v_0 using the Lambert W function,

$$v_0(z) = \left[-W_k \left(-\frac{B(z)^2}{B_m^2} v_m^2 e^{-v_m^2} \right) \right]^{1/2}, \quad (2.33)$$

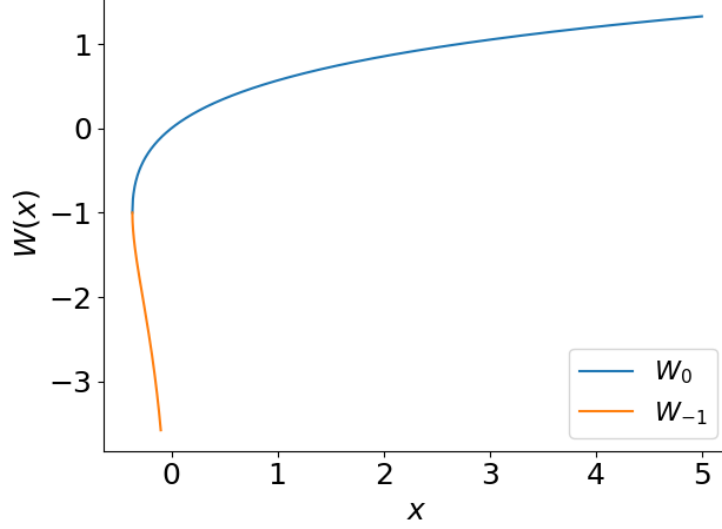


Figure 2.3: The graph of $y = W(x)$ for real $x < 5$ and $y > -4$. The upper branch (blue) with $y \geq -1$ is the graph of the function $W_0(x)$ (principal branch), the lower branch (orange) with $y \leq -1$ is the graph of the function $W_{-1}(x)$. The left most point of the curve is at $(-1/e, -1)$.

where the subscript k of W stands for branch of Lambert W function. Again, the velocity profile is normalized to ion sound speed.

When considering the velocity profile of a nozzle flow, various scenarios can be distinguished based on the Mach number parameter (v_m) and the branch (k) used in the expression for the Mach number distribution, denoted as $v_0(z)$. These parameters play a crucial role in determining the flow characteristics. The selection of appropriate v_m and k values facilitates the control of the flow characteristics in the nozzle, allowing for the realization of various flow regimes, such as subsonic, supersonic, transonic, accelerating, or decelerating profiles. Different velocity profiles are shown in Fig. 2.4.

- Subsonic profile: when $v_m < 1$ and $k = 0$, the resulting velocity profile is classified as subsonic. This means that both at the entrance and exit of the nozzle, the velocity remains subsonic, and the midpoint velocity is also less than unity ($v_m < 1$). A subsonic flow is characterized by fluid velocities that are slower than the local speed of sound. The blue and orange curves on Fig. 2.4 are both subsonic profiles. As z goes from -1 to 0 , the point (z, W) moves towards the point $(-1/e, 1)$ along the $k = -1$ branch. As z goes from 0 to 1 , the point (z, W) moves away $(-1/e, 1)$ along the same $k = -1$ branch.
- Supersonic profile: when $v_m > 1$ and $k = -1$, the velocity profile corresponds to a supersonic flow. In this situation, the fluid velocities at both the entrance and exit of the nozzle are supersonic, and the midpoint velocity (v_m) exceeds the value of unity ($v_m > 1$). Supersonic flow is characterized by velocities that surpass the speed of sound. The purple and brown curves on Fig. 2.4 are both supersonic profiles. As z goes from -1 to 0 , the point (z, W) moves towards the point $(-1/e, 1)$ along the $k = 0$ branch. As z goes from 0 to 1 , the point (z, W) moves away $(-1/e, 1)$ along the same $k = 0$ branch.

- Accelerating profile: when $v_m = 1$, the velocity profile becomes transonic. In this case, the midpoint velocity is exactly at the sonic threshold ($v_m = 1$), where the fluid velocity equals the speed of sound. To achieve an accelerating velocity profile, a configuration with $k = 0$ for $z < 0$ and $k = -1$ for $z > 0$ is employed. Here, z represents the spatial coordinate along the nozzle length. With this setup, the flow starts subsonically and gradually accelerates to a supersonic speed as it propagates along the nozzle. The green curve on Fig. 2.4 is the accelerating profile. As z goes from -1 to 0 , the point (z, W) moves towards the point $(-1/e, 1)$ along the $k = -1$ branch. As z goes from 0 to 1 , the point (z, W) moves away $(-1/e, 1)$ along another branch, $k = 0$.
- Decelerating profile: set $v_m = 1$ again, then a decelerating velocity profile can be obtained by adopting a similar approach but with reversed values of k . Specifically, the configuration will have $k = -1$ for $z < 0$ and $k = 0$ for $z > 0$, causing the flow to start supersonically and decelerate to subsonic velocities further down the nozzle. The red curve on Fig. 2.4 is the decelerating profile. As z goes from -1 to 0 , the point (z, W) moves towards the point $(-1/e, 1)$ along the $k = 0$ branch. As z goes from 0 to 1 , the point (z, W) moves away $(-1/e, 1)$ along another branch, $k = -1$.

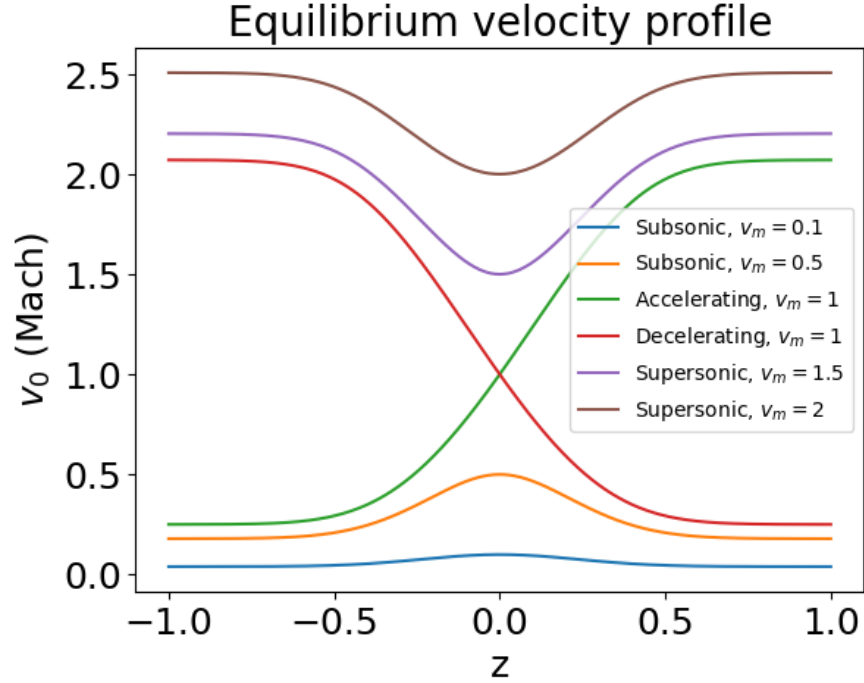


Figure 2.4: The velocity profile in the magnetic nozzle is completely determined by the midpoint mach number v_m and the branch k . A subsonic profile can be obtained by selecting $v_m < 1$ and $k = 0$. On the other hand, a supersonic profile can be obtained by setting $v_m > 1$ and $k = -1$. Lastly, for the transonic velocity profiles, the midpoint velocity is set to unity, $v_m = 1$, and then by choose $k = 0$ for $x < 0$ and $k = -1$ for $x > 0$ we get accelerating profile. Decelerating profile can be obtained similarly.

3 Eigenvalue Problem

In previous chapter, Chap. 2, we derived the governing equations for the plasma flow in the magnetic nozzle. We also discussed the velocity profiles of the steady flows in the nozzle. In this chapter, we proceed to linearize these governing equations and reframe the problem as an eigenvalue problem. More specifically, a polynomial eigenvalue problem. Finally, we explore analytically a special case where the plasma flows with constant velocity under two boundary conditions, Dirichlet boundary and fixed-open boundary.

3.1 Linearized Governing Equations

As illustrated in Sec.1.2, it is essential to linearize the governing equations in order to investigate the linear instability of plasma. Now we are going to derive the linearized governing equations with the equilibrium conditions given in above.

Let $n = n_0(z) + \tilde{n}(z, t)$ and $v = v_0(z) + \tilde{v}(z, t)$, where \tilde{n} and \tilde{v} are small perturbed quantities.

We first linearize Eq. (2.27) by setting $n = n_0 + \tilde{n}$ and $v = v_0 + \tilde{v}$,

$$\frac{\partial(n_0 + \tilde{n})}{\partial t} + (n_0 + \tilde{n})\frac{\partial(v_0 + \tilde{v})}{\partial z} + (v_0 + \tilde{v})\frac{\partial(n_0 + \tilde{n})}{\partial z} - (n_0 + \tilde{n})(v_0 + \tilde{v})\frac{\partial_z B}{B} = 0.$$

By ignoring the nonlinear terms, we obtain

$$\frac{1}{n_0}\frac{\partial \tilde{n}}{\partial t} + \frac{\partial v_0}{\partial z} + \frac{\tilde{n}}{n_0}\frac{\partial v_0}{\partial z} + \frac{\partial \tilde{v}}{\partial z} + \frac{v_0}{n_0}\frac{\partial n_0}{\partial z} + \frac{\tilde{v}}{n_0}\frac{\partial n_0}{\partial z} + \frac{v_0}{n_0}\frac{\partial \tilde{n}}{\partial z} - v_0\frac{\partial_z B}{B} - \tilde{v}\frac{\partial_z B}{B} - \tilde{n}\frac{v_0}{n_0}\frac{\partial_z B}{B} = 0.$$

Using the equilibrium condition Eq. (2.29), $\partial_z v_0 + v_0 \partial_z n_0 / n_0$ cancels $-v_0 \partial_z B / B$,

$$\frac{1}{n_0}\frac{\partial \tilde{n}}{\partial t} + \frac{\tilde{n}}{n_0}\frac{\partial v_0}{\partial z} + \frac{\partial \tilde{v}}{\partial z} + \frac{\tilde{v}}{n_0}\frac{\partial n_0}{\partial z} + \frac{v_0}{n_0}\frac{\partial \tilde{n}}{\partial z} - \tilde{v}\frac{\partial_z B}{B} - \tilde{n}\frac{v_0}{n_0}\frac{\partial_z B}{B} = 0.$$

Moreover, the last term can be written as

$$\tilde{n}\frac{v_0}{n_0}\frac{\partial_z B}{B} = \frac{\tilde{n}}{n_0}\left(\frac{\partial_z n_0}{n_0}v_0 + \frac{\partial v_0}{\partial z}\right).$$

Now, we get the linearized conservation of mass,

$$\frac{1}{n_0}\frac{\partial \tilde{n}}{\partial t} + \frac{\partial \tilde{v}}{\partial z} + v_0 \tilde{Y} + \tilde{v}\frac{\partial_z n_0}{n_0} - \tilde{v}\frac{\partial_z B}{B} = 0, \quad (3.1)$$

where

$$\tilde{Y} \equiv \frac{1}{n_0}\frac{\partial \tilde{n}}{\partial z} - \frac{\partial_z n_0}{n_0^2}\tilde{n} = \frac{\partial}{\partial z}\left(\frac{\tilde{n}}{n_0}\right).$$

To linearize the conservation of momentum, we follow the same logic by substituting $n = n_0 + \tilde{n}$, and $v = v_0 + \tilde{v}$ in Eq. (2.28),

$$(n_0 + \tilde{n}) \frac{\partial(v_0 + \tilde{v})}{\partial t} + (n_0 + \tilde{n})(v_0 + \tilde{v}) \frac{\partial(v_0 + \tilde{v})}{\partial z} = - \frac{\partial(n_0 + \tilde{n})}{\partial z}.$$

Again, ignore second order perturbations and rearrange terms, we have

$$\frac{\partial \tilde{v}}{\partial t} + v_0 \frac{\partial \tilde{v}}{\partial z} + \tilde{v} \frac{\partial v_0}{\partial z} = - \frac{1}{n_0} \frac{\partial n_0}{\partial z} - \frac{1}{n_0} \frac{\partial \tilde{n}}{\partial z} - v_0 \frac{\partial v_0}{\partial z} - \frac{\tilde{n}}{n_0} v_0 \frac{\partial v_0}{\partial z}.$$

Using the equilibrium condition Eq. (2.30) on the RHS, we get the linearized conservation of momentum,

$$\frac{\partial \tilde{v}}{\partial t} + \frac{\partial(v_0 \tilde{v})}{\partial z} = -\tilde{Y}. \quad (3.2)$$

3.2 Polynomial Eigenvalue Problem

We can further simplify the problem by combining Eq. (3.1) and Eq. (3.2) into a single equation. We can substitute Eq. (3.2) into Eq. (3.1) to eliminate \tilde{Y} ,

$$\frac{\partial}{\partial t} \frac{\tilde{n}}{n_0} + \frac{\partial \tilde{v}}{\partial z} - v_0 \left(\frac{\partial}{\partial t} \tilde{v} + \frac{\partial(v_0 \tilde{v})}{\partial z} \right) + \tilde{v} \frac{\partial_z n_0}{n_0} - \tilde{v} \frac{\partial_z B}{B} = 0. \quad (3.3)$$

In order to investigate the linear instability of the flow, we need to formulate it as an eigenvalue problem. To do that, we assume the perturbed density and velocity are oscillatory, i.e. $\tilde{n}, \tilde{v} \sim \exp(-i\omega t)$, where ω is the oscillation frequency of the perturbed quantities. This frequency can be a complex number.

As illustrated in Sec.1.2, the flow can be stable or unstable depending on the imaginary part of the frequency. If $\text{Im}(\omega) > 0$, then the perturbed quantities $\tilde{n} \sim \exp(\text{Im}(\omega)t)$, which means it grows exponentially with time, hence unstable. If $\text{Im}(\omega) \leq 0$, then the amplitude of the perturbed quantities are either unchanged or exponentially decreasing, hence the flow is stable.

By assuming oscillatory perturbed quantities, Eq. (3.3) becomes,

$$-i\omega \frac{\tilde{n}}{n_0} + \frac{\partial \tilde{v}}{\partial z} - v_0 \left(-i\omega \tilde{v} + \frac{\partial(v_0 \tilde{v})}{\partial z} \right) + \tilde{v} \frac{\partial_z n_0}{n_0} - \tilde{v} \frac{\partial_z B}{B} = 0. \quad (3.4)$$

Using the equilibrium condition Eq. (2.29), we can eliminate the term $\partial_z B/B$,

$$-i\omega \frac{\tilde{n}}{n_0} + \frac{\partial \tilde{v}}{\partial z} + v_0 \left(i\omega \tilde{v} - v_0 \frac{\partial \tilde{v}}{\partial z} - \tilde{v} \frac{\partial v_0}{\partial z} \right) - \tilde{v} \frac{\partial_z v_0}{v_0} = 0.$$

Rearrange terms, we have

$$-i\omega \frac{\tilde{n}}{n_0} + i\omega v_0 \tilde{v} + (1 - v_0^2) \frac{\partial \tilde{v}}{\partial z} - \left(v_0 + \frac{1}{v_0} \right) \frac{\partial v_0}{\partial z} \tilde{v} = 0. \quad (3.5)$$

Now we take $\partial/\partial t$ on Eq. (3.2). Recall the fact that $\tilde{Y} = \partial_z(\tilde{n}/n_0)$, we have

$$\omega^2 \tilde{v} + i\omega \left(v_0 \frac{\partial \tilde{v}}{\partial z} + \tilde{v} \frac{\partial v_0}{\partial z} \right) = \frac{\partial}{\partial t} \frac{\partial}{\partial z} \left(\frac{\tilde{n}}{n_0} \right).$$

Switch the order of ∂_t and ∂_z , and recall $-i\omega\tilde{n}/n_0$ can be obtained from Eq. (3.5), we get

$$\omega^2\tilde{v} + i\omega\left(v_0\frac{\partial\tilde{v}}{\partial z} + \tilde{v}\frac{\partial v_0}{\partial z}\right) = \frac{\partial}{\partial z}\left(-i\omega v_0\tilde{v} - (1-v_0^2)\frac{\partial\tilde{v}}{\partial z} + \left(v_0 + \frac{1}{v_0}\right)\frac{\partial v_0}{\partial z}\tilde{v}\right).$$

Expand the RHS and collect terms, we get

$$\begin{aligned} & \omega^2\tilde{v} \\ & + 2i\omega\left(v_0\frac{\partial}{\partial z} + \frac{\partial v_0}{\partial z}\right)\tilde{v} \\ & + \left[(1-v_0^2)\frac{\partial^2}{\partial z^2} - \left(3v_0 + \frac{1}{v_0}\right)\frac{\partial v_0}{\partial z}\frac{\partial}{\partial z} - \left(1 - \frac{1}{v_0^2}\right)\left(\frac{\partial v_0}{\partial z}\right)^2 - \left(v_0 + \frac{1}{v_0}\right)\frac{\partial^2 v_0}{\partial z^2}\right]\tilde{v} = 0. \end{aligned} \tag{3.6}$$

In mathematical terms, Eq. (3.6) is a polynomial eigenvalue problem, where ω is an eigenvalue to the problem, and the velocity perturbation \tilde{v} is an eigenfunction associated with the eigenvalue ω . In the later chapters we will discuss the methods to tackle this problem.

3.3 Analytical Solutions to Constant Velocity Case

In this section we are going to tackle the simplest case of the polynomial eigenvalue problem, Eq. (3.6), the constant velocity case.

The constant velocity profile can be viewed as the limit of $v_0(z)$ as the spread of magnetic field goes to infinity, $\delta \rightarrow \infty$. As the parameter δ approaches infinity, the width of the magnetic field enlarges and eventually becomes flat. In other words, a constant magnetic field. We can easily see that the velocity profile $v_0(z)$ becomes a constant as well.

If we set the velocity profile of the equilibrium flow to constant $v_0 = \text{const}$, then Eq. (3.6) becomes a simple boundary value problem with second order constant coefficients differential equation

$$\omega^2\tilde{v} + 2i\omega v_0\frac{\partial\tilde{v}}{\partial z} + (1-v_0^2)\frac{\partial^2\tilde{v}}{\partial z^2} = 0. \tag{3.7}$$

We need two boundary values in order to uniquely determine the solution (up to a constant). In the following subsections, we will solve Eq. (3.6) with constant velocity under two sets of boundary conditions, Dirichlet and fixed-open boundary condition.

3.3.1 Dirichlet Boundary

In this subsection, the so-called Dirichlet boundary condition will be used. It has the name because the function values are fixed at the two ends of the nozzle,

$$\tilde{v}(-1) = \tilde{v}(1) = 0. \tag{3.8}$$

At the left end (entrance of the nozzle), $z = -1$, we assume there are no perturbations. As for the right end (exit of the nozzle), $z = 1$, setting the velocity perturbation to 0 might not be the best boundary condition

to describe the physical process of the plasma flow in the nozzle, it nevertheless serves as a starting point to the problem and is also useful to test numerical solutions.

With the two boundary conditions, the solution to the second order constant coefficients differential equation Eq. (3.7) will be a linear combination of terms of the form $e^{ik(z+1)}$,

$$\tilde{v}(z) = C \left[\exp \left(i\omega \frac{z+1}{v_0+1} \right) - \exp \left(i\omega \frac{z+1}{v_0-1} \right) \right], \quad (3.9)$$

where $C \in \mathbb{C}$ is a complex constant, and the frequencies (eigenvalues) are

$$\omega_n = n\pi(1 - v_0^2)/2, \quad n \in \mathbb{Z}. \quad (3.10)$$

The derivation is shown in Appendix. A. The results are plotted in Fig. 3.1 This result tells us that the flow in a magnetic nozzle with uniform magnetic field is stable regardless the velocity v_0 for constant velocity case. Worth to mention, perturbations with positive $\text{Re}(\omega)$ produce the oscillation as those with negative $\text{Re}(\omega)$, so we only focus on the eigenvalues with positive real parts.

This solution is exact, we will use this to benchmark the simulation results in later chapter.

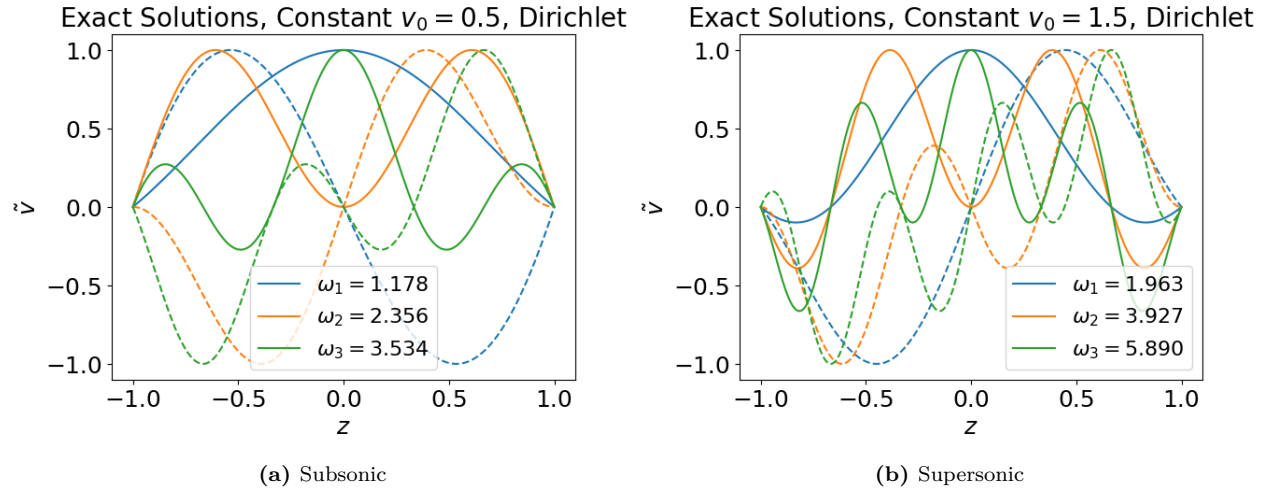


Figure 3.1: The plots show the first three non-zero exact solutions to Eq. (3.7) with Dirichlet boundary for both subsonic and supersonic plasma flow. The subsonic and supersonic plasma flows are stable.

3.3.2 Fixed-Open Boundary

Fixed-Open boundary condition assumes that there are no perturbations at the entrance of the nozzle, and it is free on the exit of the nozzle.

$$\omega^2 \tilde{v} + 2i\omega v_0 \frac{\partial \tilde{v}}{\partial z} + (1 - v_0^2) \frac{\partial^2 \tilde{v}}{\partial z^2} = 0 \quad \tilde{v}(-1) = \frac{\partial \tilde{v}}{\partial z}(1) = 0. \quad (3.11)$$

The approach to this problem is similar to Eq. (3.9), the only difference is the eigenvalues. In this case, the eigenvalues are

$$\omega_n = (v_0^2 - 1) \left[\frac{n\pi}{2} - \frac{1}{4}i \ln \left| \frac{v_0 - 1}{v_0 + 1} \right| \right], \quad n \in \mathbb{Z}. \quad (3.12)$$

Again, the derivation can be found in Appendix. A. The growth rate is independent of the mode number n , and it is always $\ln |(v_0 - 1)/(v_0 + 1)|$. It is positive for any $v_0 \neq 1$. Therefore,

- If $v_0 < 1$, then $\text{Im}(\omega) < 0$, it's damped oscillation, hence stable.
- If $v_0 > 1$, then $\text{Im}(\omega) > 0$, it's unstable.

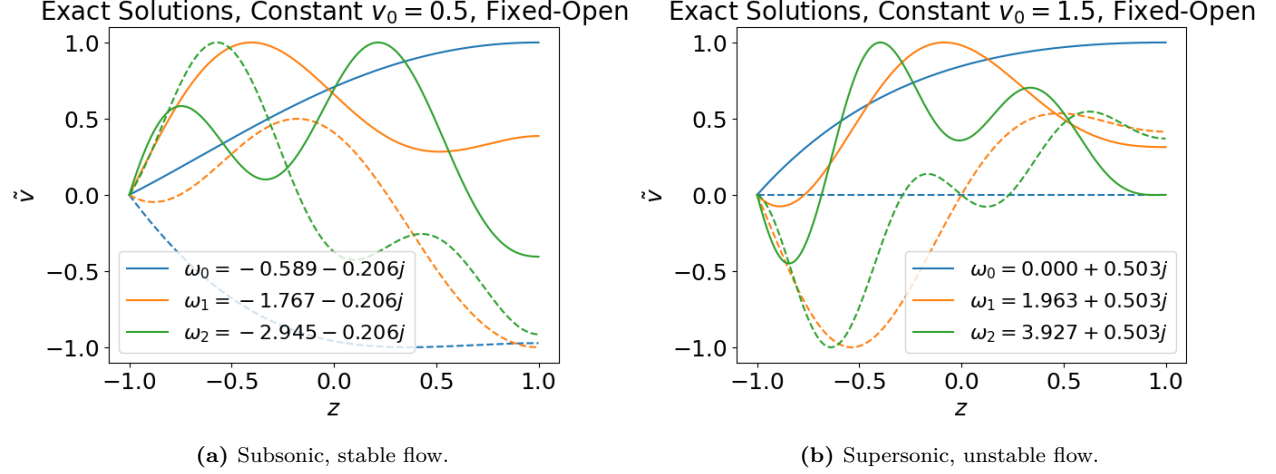


Figure 3.2: The plots show the first three exact solutions to Eq. (3.7) with fixed-open boundary for both subsonic and supersonic plasma flows. The flow is stable for subsonic case and unstable for supersonic case.

4 Spectral Method

In Chap. 3, we explored the analytical solutions, including eigenvalues and eigenfunctions, to Eq. (3.7), a special case of a more general polynomial eigenvalue problem Eq. (3.6). As we can see, it is nearly impossible to solve Eq. (3.6) analytically. Hence, we need numerical methods to investigate the instability of plasma flow with spatial varying velocity profile. Spectral methods is a suitable tool for our problem.

Spectral method is an important tool for solving problems related to partial differential equations. It can provide superior accuracy compare to other local methods such as finite difference [15]. In this thesis, we are going to solve a polynomial eigenvalue problem, i.e. Eq. (3.6) together with specific boundary conditions.

Suppose the velocity perturbation \tilde{v} can be approximated by some orthogonal basis functions $\{u_k(z)\}_{k=1}^{\infty}$ on $-1 \leq z \leq 1$,

$$\tilde{v} = \sum_{k=0}^N c_k u_k(z), \quad (4.1)$$

where c_k are coefficients to be determined. There are different choices for $u_k(z)$ including but not limited to [15],

- $u_k(z) = T_k(z)$ (Chebyshev spectral method)
- $u_k(z) = L_k(z)$ (Legendre spectral method)
- $u_k(z) = H_k(z)$ (Hermite spectral method)

where T_k , L_k and H_k are Chebyshev, Legendre, and Hermite polynomials of degree k .

Using the above approximation in Eq. (3.6), and take the inner product with some other test functions $\{\psi_k(z)\}$ on $[-1, 1]$. That is, integrate the product of $\psi_k(z)$ and Eq. (3.6) from -1 to 1. The left-hand side of Eq. (3.6) becomes a matrix equation,

$$(\omega^2 \mathbf{1} + \omega \mathbf{M} + \mathbf{N}) \mathbf{c} = \mathbf{0}, \quad (4.2)$$

where $\mathbf{c} = [c_0, \dots, c_N]^T$ is a vector of coefficients, and

$$M_{jk} = 2i \int_{-1}^1 dz \psi_j \left(v_0 \frac{\partial}{\partial z} + \frac{\partial v_0}{\partial z} \right) u_k \quad (4.3)$$

$$N_{jk} = \int_{-1}^1 dz \psi_j \left[(1 - v_0^2) \frac{\partial^2}{\partial z^2} - \left(3v_0 + \frac{1}{v_0} \right) \frac{\partial v_0}{\partial z} \frac{\partial}{\partial z} - \left(1 - \frac{1}{v_0^2} \right) \left(\frac{\partial v_0}{\partial z} \right)^2 - \left(v_0 + \frac{1}{v_0} \right) \frac{\partial^2 v_0}{\partial z^2} \right] u_k \quad (4.4)$$

Depending on the choice of the test function, spectral method can be further classified [15],

- Galerkin: The test functions are the same as the trial ones, i.e. $\psi_k = u_k$.

- Collocation: The test functions $\{\psi_k\}$ are Lagrange basis polynomials such that $\psi_k(z_j) = \delta_{jk}$, where z_j are preassigned collocation points.

To solve Eq. (4.2), we simply augment the coefficient vector to $[\mathbf{c}, \omega \mathbf{c}]^T$. Then the matrix equation can be written as an algebraic eigenvalue problem,

$$\begin{bmatrix} \mathbf{0} & \mathbf{1} \\ -\mathbf{N} & -\mathbf{M} \end{bmatrix} \begin{bmatrix} \mathbf{c} \\ \omega \mathbf{c} \end{bmatrix} = \omega \begin{bmatrix} \mathbf{c} \\ \omega \mathbf{c} \end{bmatrix}. \quad (4.5)$$

We can apply standard eigenvalue problem solver to this question to obtain the eigenvalues ω and their corresponding eigenvectors $[\mathbf{c}, \omega \mathbf{c}]^T$. Therefore, the eigenfunctions $\tilde{v} = \sum_k c_k u_k(z)$ to the original problem can be recovered by extracting coefficients \mathbf{c} from the eigenvectors.

4.1 Spectral Collocation Method

One of the methods we are going to use is called the Chebyshev collocation method. Given a set of Chebyshev points, $\{z_j = \cos(j\pi/N)\}_{j=0}^N$, and let $\{h_j\}$ be the Lagrange basis polynomials associated with $\{z_j\}_{j=0}^N$, and define matrix $D_{kj} = h'_j(z_k)$. By setting $\tilde{v}(z) = \sum_{j=0}^N c_j h_j(z)$, we see that

$$\tilde{v}(z_k) = \sum_{j=0}^N \tilde{v}_j h_j(z_k) = c_k \quad (4.6)$$

$$\tilde{v}'(z_k) = \sum_{j=0}^N \tilde{v}_j h'_j(z_k) = \sum_{j=0}^N D_{kj} c_j \quad (4.7)$$

$$\tilde{v}''(z_k) = \sum_{j=0}^N \tilde{v}_j h''_j(z_k) = \sum_{j=0}^N D_{kj}^2 c_j \quad (4.8)$$

We see that the coefficient vector \mathbf{c} becomes a vector containing the values of \tilde{v} evaluated at the collocation points, i.e. $\mathbf{c} = [v(z_0), \dots, v(z_N)]^T$, and the matrix D and D^2 act as the differential operators $\frac{\partial}{\partial z}$ and $\frac{\partial^2}{\partial z^2}$, respectively. The matrix D is called Chebyshev differentiation matrix since it acts as $\frac{\partial}{\partial z}$ and evaluates at Chebyshev points.

Chebyshev Differentiation Matrix

The Chebyshev differentiation matrix finds the derivative of the Lagrange interpolant of the given data points $(z_j, \tilde{v}(z_j))$ where $\{z_j = \cos(j\pi/N)\}_{j=0}^N$ are the Chebyshev points. Suppose $\mathbf{v} = [v(z_0), \dots, v(z_N)]^T$, then the N -point, D_N , Chebyshev differentiation matrix gives $D_N \mathbf{v} \approx [v'(z_0), \dots, v'(z_N)]^T$. Higher order differentiation can be achieved by taking powers of D_N . Thanks to [16], the construction of Chebyshev differentiation matrix is given in Fig. 4.1.

If we instead use the equal-spaced points, $\{z_j = 2j/N\}_{j=0}^N$, then the matrix defined by $D_{kj} = h'_j(x_k)$ will be the usual finite difference differentiation matrix. However, Chebyshev differentiation matrix has superior accuracy due to the wise choice of collocation points. On Fig. 4.2 we see that the Chebyshev achieve higher accuracy.

$$D_N = \begin{array}{|c|c|c|} \hline \frac{2N^2 + 1}{6} & 2 \frac{(-1)^j}{1 - x_j} & \frac{1}{2}(-1)^N \\ \hline & \begin{array}{c} \frac{(-1)^{i+j}}{x_i - x_j} \\ \frac{-x_j}{2(1 - x_j^2)} \\ \frac{(-1)^{i+j}}{x_i - x_j} \end{array} & \frac{1}{2} \frac{(-1)^i}{1 + x_i} \\ \hline -\frac{1}{2} \frac{(-1)^i}{1 - x_i} & & \\ \hline -\frac{1}{2}(-1)^N & -2 \frac{(-1)^{N+j}}{1 - x_j} & -\frac{2N^2 + 1}{6} \\ \hline \end{array}$$

Figure 4.1: Construction of N -point Chebyshev differentiation matrix. The nodes $x_j = \cos(j\pi/N)$ are Chebyshev points. Adapted from [16].

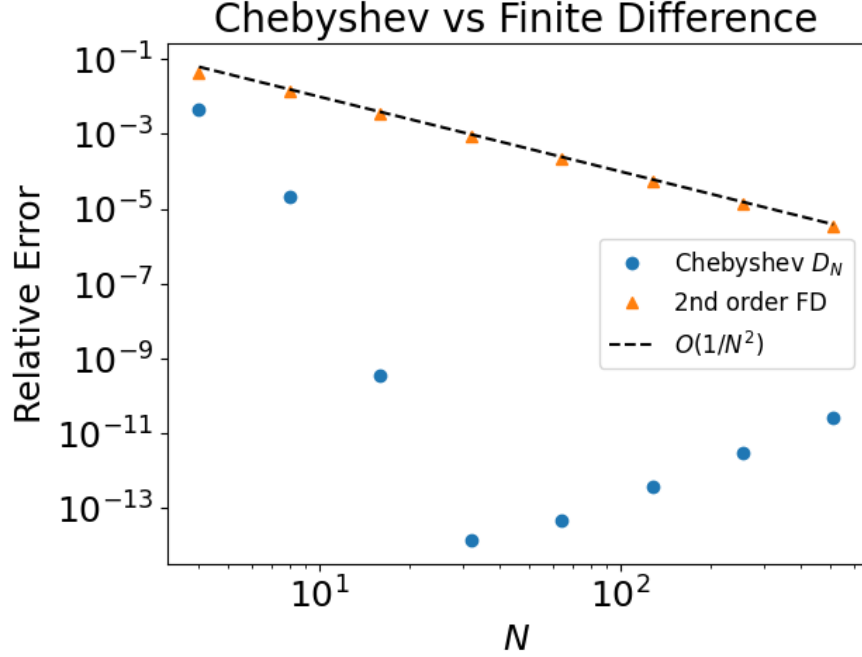


Figure 4.2: Comparison of accuracy between Chebyshev differentiation matrix and 2nd order finite difference differentiation matrix. Both methods are applied to compute the derivative of function $f(x) = \ln(2 + \sin(x))$ on $[-1, 1]$ using different resolutions, i.e. number of points N . We see that Chebyshev achieve higher accuracy using same amount of points.

Dirichlet Boundary

To implement Dirichlet boundary condition, $\tilde{v}(\pm 1) = 0$, to Eq. (4.2), we only need to remove the first and last columns and rows of each matrix, $\mathbf{0}$, $\mathbf{1}$, \mathbf{M} , and \mathbf{N} . The reason is originated from the Chebyshev differentiation matrix, Fig. 4.3. For a $(N + 1) \times (N + 1)$ Chebyshev differentiation matrix D_N , the first and last row has no effect since the first and last value of \tilde{v} are 0. We only need the interior of D_N which is an $N \times N$ matrix. After solving Eq. (4.2), we get the eigenvalues ω and their associated eigenfunctions evaluated at the interior collocation points $\mathbf{c} = [\tilde{v}_1, \dots, \tilde{v}_{N-1}]^T$. We will need to prepend and append 0 to the eigenfunctions, $[0, \tilde{v}_1, \dots, \tilde{v}_{N-1}, 0]^T$. Listing. 4.1 has the pseudocode for solving Eq. (4.2).

Fixed-Open Boundary

To implement fixed-open boundary condition, i.e. $\tilde{v}(-1) = \tilde{v}'(1) = 0$. Notice that $\tilde{v}'(-1)$ can be expressed as,

$$0 = \tilde{v}'(1) = \sum_{j=0}^N D_{ij} \tilde{v}_j, \quad (4.9)$$

where $\tilde{v}_j = \tilde{v}(z_j)$ is the evaluation of \tilde{v} at Chebyshev points $z_j = \cos(j\pi/N)$. By rearranging the terms, we get the expression of \tilde{v}_0 in terms of \tilde{v} at other collocation points.

$$\tilde{v}_0 = -\frac{1}{D_{00}} \sum_{j=1}^N D_{0j} \tilde{v}_j. \quad (4.10)$$

$$\begin{array}{c} \text{ignored} \rightarrow \begin{bmatrix} \tilde{v}'_0 \\ \tilde{v}'_1 \\ \vdots \\ \tilde{v}'_{N-1} \\ \tilde{v}'_N \end{bmatrix} \end{array} = \begin{array}{c} \begin{bmatrix} \text{gray bar} \\ \text{white box } D_N \\ \text{gray bar} \end{bmatrix} \end{array} \begin{array}{c} \begin{bmatrix} \tilde{v}_0 \\ \tilde{v}_1 \\ \vdots \\ \tilde{v}_{N-1} \\ \tilde{v}_N \end{bmatrix} \leftarrow \begin{array}{l} \text{zeroed} \\ \text{zeroed} \end{array} \end{array}$$

Figure 4.3: Since the function v is zero at x_0 and x_N , the first and last columns has no effect and the same argument applies to first and last rows. Adapted from [16].

```

1 import numpy as np
2 # collocation points, differentiation matrices
3 N = 101 # number of points
4 x, D1, D2 = Chebyshev(N)
5 # solve polynomial eigenvalue problem
6 A11 = np.zeros_like(D1)
7 A12 = np.eye(*D1.shape)
8 A21 = -np.diag(1-v0**2)@D2 \
9       + np.diag((3*v0 + 1/v0)*(D1@v0))@D1 \
10      + np.diag((1-1/v0**2)*(D1@v0)**2) \
11      + np.diag((v0+1/v0)*(D2@v0))
12 A22 = -2j*(np.diag(v0)@D1 + np.diag(D1@v0))
13 A = np.block([[A11[1:-1,1:-1], A12[1:-1,1:-1]],
14              [A21[1:-1,1:-1], A22[1:-1,1:-1]]])
15 omega, V = np.linalg.eig(A)
16 # pad two ends of eigenfunctions by 0 (dirichlet boundary)
17 V = np.pad(V, ((1,1), (0,0)))

```

Listing 4.1: Pseudocode for solving polynomial eigenvalue problem using spectral collocation with Dirichlet boundary condition.

```

1 import numpy as np
2 # collocation points, differentiation matrices
3 N = 101 # number of points
4 x, D1, D2 = Chebyshev(N)
5 # modify second row to ensure v'(1)=0
6 D1v = D1
7 D2v = D2
8 D1v[1,:] = D1[1,:] - D1[1,0]/D1[0,0]*D1[0,:]
9 D2v[1,:] = D2[1,:] - D2[1,0]/D1[0,0]*D1[0,:]
10 # only the differential operators acting on v needs to be modified
11 A11 = np.zeros_like(D1)
12 A12 = np.eye(*D1.shape)
13 A21 = -np.diag(1-v0**2)@D2v \
14       + np.diag((3*v0 + 1/v0)*(D1@v0))@D1v \
15       + np.diag((1-1/v0**2)*(D1@v0)**2) \
16       + np.diag((v0+1/v0)*(D2@v0))
17 A22 = -2j*(np.diag(v0)@D1v + np.diag(D1@v0))
18 A = np.block([[A11[:,-1], A12[:,-1]],
19               [A21[:,-1], A22[:,-1]]])
20 omega, V = np.linalg.eig(A)
21 # add v(1) to eigenfunctions
22 V = np.pad(V, ((1,0),(0,0)))
23 for j in range(V.shape[1]):
24     V[0,j] = -(D1[0,1:]@V[1:,j])/D1[0,0]

```

Listing 4.2: Pseudocode for solving polynomial eigenvalue problem using spectral collocation with fixed-open boundary condition.

To incorporate this information into the differentiation matrix, we modify the expressions for evaluating the derivatives at point x_1 ,

$$\tilde{v}'_1 = \sum_{j=0}^N D_{1j} \tilde{v}_j = \sum_{j=1}^N \left(D_{1j} - \frac{D_{10}}{D_{00}} D_{0j} \right) \tilde{v}_j \quad (4.11)$$

$$\tilde{v}''_1 = \sum_{j=0}^N D_{1j}^2 \tilde{v}_j = \sum_{j=1}^N \left(D_{1j}^2 - \frac{D_{10}^2}{D_{00}} D_{0j} \right) \tilde{v}_j. \quad (4.12)$$

This indicates the new differentiation matrices should be

$$D'_{ij} = \begin{cases} D_{ij}, & \text{if } i \neq 1 \\ D_{1j} - \frac{D_{10}}{D_{00}} D_{0j}, & \text{if } i = 1 \end{cases} \quad (4.13)$$

$$D'^2_{ij} = \begin{cases} D_{ij}^2, & \text{if } i \neq 1 \\ D_{1j}^2 - \frac{D_{10}^2}{D_{00}} D_{0j}, & \text{if } i = 1 \end{cases} \quad (4.14)$$

After getting the eigenfunctions $\mathbf{c} = [\tilde{v}_1, \dots, \tilde{v}_N]^T$, we need to prepend \tilde{v}_0 to \mathbf{c} using Eq. (4.10). See Listing. 4.2 for pseudocode.

4.2 Spectral Galerkin Method

Another spectral method we used in the numerical experiments is the Legendre-Galerkin method. Meaning that the basis functions are chosen to be the compact combinations of Legendre polynomials [15],

$$u_k(z) = L_k(z) + a_k L_{k+1}(z) + b_k L_{k+2}(z), \quad (4.15)$$

where the parameters $\{a_k, b_k\}$ are chosen to satisfy the boundary conditions. The test functions are the same as the basis functions.

Suppose the boundary conditions are

$$a_- \tilde{v}(-1) + b_- \tilde{v}'(-1) = 0, a_+ \tilde{v}(1) + b_+ \tilde{v}'(1) = 0.$$

Then the parameters $\{a_k, b_k\}$ can be worked out by simple linear algebra,

$$\begin{aligned} a_k &= \frac{(2k+3)(a_+ b_- + a_- b_+)}{\text{DET}_k} \\ b_k &= \frac{-2a_- a_+ + (k+1)^2(a_+ b_- - a_- b_+) + b_- b_+ k(k+1)^2(k+2)/2}{\text{DET}_k}, \end{aligned} \quad (4.16)$$

where $\text{DET}_k = 2a_+ a_- + a_- b_+ (k+2)^2 - a_+ b_- (k+2)^2 - b_- b_+ (k+1)(k+2)^2(k+3)/2$.

Dirichlet Boundary

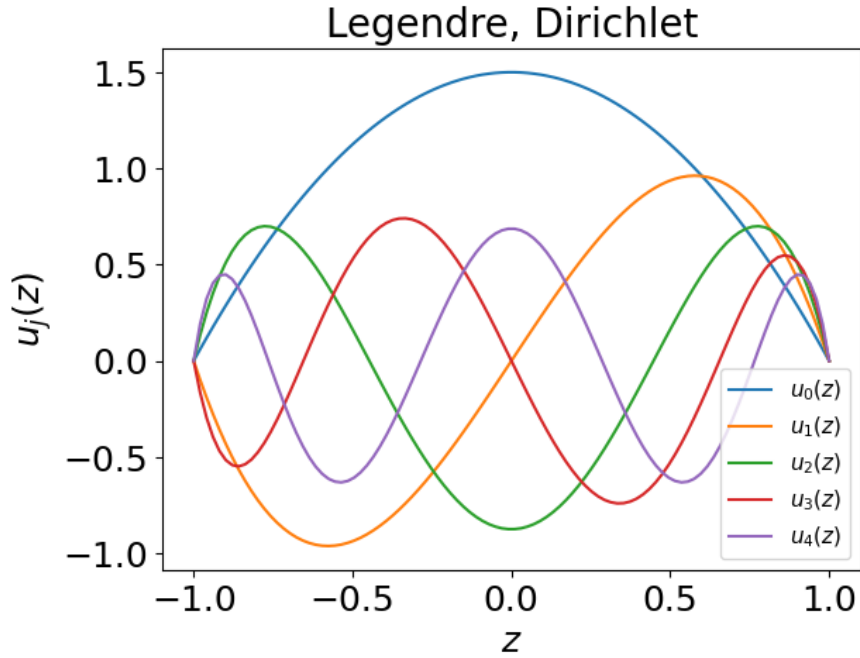


Figure 4.4: Compact Legendre combinations satisfying Dirichlet boundary condition.

The necessary parameters to make $u_k(\pm 1) = 0$ are $a_k = 0, b_k = -1$. The basis functions are therefore,

$$u_k(z) = L_k(z) - L_{k+2}(z). \quad (4.17)$$

The first 5 basis functions are shown in Fig. 4.4.

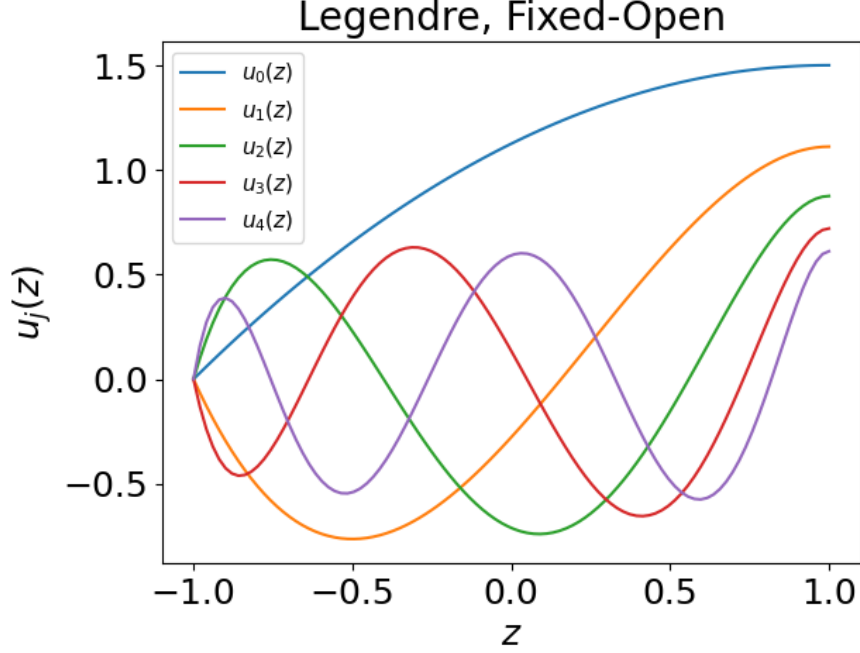


Figure 4.5: Compact Legendre combinations satisfying fixed-open boundary condition.

Fixed-Open Boundary

The necessary parameters to make $u_k(-1) = u'_k(1) = 0$ are $a_k = (2k+3)/(k+2)^2$, $b_k = -(k+1)^2/(k+2)^2$. The basis functions are therefore,

$$u_k(z) = L_k(z) + \frac{2k+3}{(k+2)^2} L_{k+1}(z) - \frac{(k+1)^2}{(k+2)^2} L_{k+2}(z) \quad (4.18)$$

The first 5 basis functions are shown in Fig. 4.5.

By setting $\tilde{v}(z) = \sum_{j=0}^N c_j u_j(z)$, \tilde{v} satisfies the boundary conditions automatically. There is no need to modify the matrices in Eq. (4.2).

To evaluate the matrix elements, inner products are calculated by numerical integration, in this thesis Simpson's rule is used. Eq. (4.3) and Eq. (4.4) become

$$M_{jk} = 2i \sum_m^M w_m \Delta z_m \left[\psi_j \left(v_0 \frac{\partial}{\partial z} + \frac{\partial v_0}{\partial z} \right) u_k \right]_{z_m} \quad (4.19)$$

$$N_{jk} = \sum_m^M w_m \Delta z_m \left\{ \psi_j \left[(1 - v_0^2) \frac{\partial^2}{\partial z^2} - \left(3v_0 + \frac{1}{v_0} \right) \frac{\partial v_0}{\partial z} \frac{\partial}{\partial z} - \left(1 - \frac{1}{v_0^2} \right) \left(\frac{\partial v_0}{\partial z} \right)^2 - \left(v_0 + \frac{1}{v_0} \right) \frac{\partial^2 v_0}{\partial z^2} \right] u_k \right\}_{z_m}, \quad (4.20)$$

where M is the number of points, $\Delta z_m = 2/M$, and w_m are coefficients corresponding to the quadrature rule

```

1 import numpy as np
2 from scipy.special import legendre # legendre polynomials
3 from scipy.integrate import simpson # simpson quadrature
4 # collocation points, differentiation matrices
5 N = 25 # number of basis functions
6 M = 101 # number of points
7 x, D1, D2 = Chebyshev(M, "symmetric", "CH")
8 # use this basis for drichlet boundary
9 u = lambda x,k: (legendre(k) + (2*k+3)/(k+2)**2*legendre(k+1) - (k+1)**2/(k+2)**2*legendre(k+2))(x)
10 # use this basis for fixed-open boundary
11 u = lambda x,k: (legendre(k) - legendre(k+2))(x)
12 # solve polynomial eigenvalue problem
13 A11 = np.zeros_like(D1)
14 A12 = np.eye(*D1.shape)
15 A21 = np.zeros((N,N),dtype=complex)
16 A22 = np.zeros((N,N),dtype=complex)
17 for i in range(N):
18     for j in range(N):
19         A21[i,j] = simpson(
20             - u(x,i)*(1-v0**2)*(D2@u(x,j))
21             + u(x,i)*(3*v0+1/v0)*(D1@v0)*(D1@u(x,j))
22             + u(x,i)*(1-1/v0**2)*(D1@v0)**2*u(x,j)
23             + u(x,i)*(v0+1/v0)*(D2@v0)*u(x,j),
24             x=x)
25         A22[i,j] = -2j*simpson(u(x,i)*v0*(D1@u(x,j)) + u(x,i)*(D1@v0)*u(x,j),x=x)
26 A = np.block([[A11, A12],
27               [A21, A22]])
28 omega, C = np.linalg.eig(A)
29 # construct eigenfunctions
30 V = np.zeros((x.size, C.shape[1]),dtype=complex)
31 for i in range(C.shape[1]):
32     for k in range(N):
33         V[:, i] += C[k,i]*u(x, k)

```

Listing 4.3: Pseudocode for solving polynomial eigenvalue problem using Legendre-Galerkin method

employed. In this case,

$$w_n = \begin{cases} 1/3, & \text{if } m = 0, M \\ 4/3, & \text{if } m \text{ is odd} \\ 2/3, & \text{if } m \neq 0, M \text{ and } m \text{ is even.} \end{cases} \quad (4.21)$$

After solving Eq. (4.2), the eigenvector \mathbf{c} can be used to reconstruct the eigenfunctions. See Listing. 4.3 for more details.

4.3 Spectral Theory in Finite-Dimensional Normed Spaces

Spectral method transforms the polynomial eigenvalue problem to an algebraic eigenvalue problem. For completion, some important linear algebra results are included in this section.

Let X be a finite dimensional normed space and $\hat{T} : X \rightarrow X$ a linear operator. Since any linear operator can be represented by a matrix, the spectral theory of \hat{T} is essentially matrix eigenvalue theory [17]. Let A be a matrix representation of \hat{T} , then we have the definition.

Definition 2 (Kryszig [17]). An eigenvalue of a square matrix A is a complex number λ such that

$$Ax = \lambda x$$

has a solution $x \neq 0$. This x is called an **eigenvector** of A corresponding to that eigenvalue λ . The set $\sigma(A)$ of all eigenvalues of A is called the **spectrum** of A . Its complement $\rho(A) = \mathbb{C} - \sigma(A)$ in the complex plane is called the **resolvent** set of A .

By choosing different bases in X , we can have different matrix representation of \hat{T} . We need to make sure the eigenvalues of a linear operator is independent of the basis chosen. Fortunately, a theorem ensures that.

Theorem 1 (Kryszig [17]). All matrices representing a given linear operator $\hat{T} : X \rightarrow X$ on a finite dimensional normed space X relative to various bases for X have the same eigenvalues.

Moreover, we don't need to worry about the existence of eigenvalues of a linear operator. The following theorem shows the existence of them.

Theorem 2 (Kryszig [17]). A linear operator on a finite dimensional complex normed space $X \neq O$ has at least one eigenvalue.

4.4 Spectral Pollution and Spurious Modes

In this section, we will discuss an important phenomenon we observe throughout the numerical experiments using spectral method. It is the phenomenon of spectral pollution. Then we will provide a method to filter these spurious modes.

Spectral pollution refers to the phenomenon which some eigenvalues are not converging to the correct value when the mesh density is increased. The wrong eigenvalues are referred as spurious modes. When solving eigenvalue problems using spectral methods with finite difference or finite element approximations, spectral pollution might occur [18]. The cause of the spectral pollution is originated from the improper discretization of the differential operators. In the following sections, we are going to take a closer look at the differential operators in finite difference method, and reveal the occurrence of spurious modes when solving Eq. (3.7) with supersonic velocity profile.

4.4.1 Analysis of Numerical Spectrum

In this section, we will analyze the analytical and numerical dispersion relation of the following problem,

$$\omega^2 \tilde{v} + 2i\omega v_0 \frac{\partial \tilde{v}}{\partial z} + (1 - v_0^2) \frac{\partial^2 \tilde{v}}{\partial z^2} = 0, \quad v(\pm 1) = 0$$

It is a special case (i.e., $v_0 = \text{constant}$) of a more general problem Eq. (3.6). The analytical dispersion relation can be obtained by substituting $\tilde{v} = \exp(-i\omega t + kz)$ into the above equation,

$$\omega = k(v_0 \pm 1). \tag{4.22}$$

Since the wavenumber k is real, the dispersion relation suggests that the eigenvalue ω should be real.

Now let's analyze the dispersion relation produced by central finite difference. To do this we need to first understand the effect of the differential operators on function \tilde{v} in finite difference. If we assume $\tilde{v} \sim \exp(ikz)$, and let $\beta \equiv kh/2$. Then in finite difference discretization scheme, the differential operators d^n/dz^n are equivalent to the following factors [18],

$$\begin{aligned} \frac{d^0}{dz^0} &\rightarrow G_0 = 1 \\ \frac{d^1}{dz^1} &\rightarrow G_1 = [\exp(2i\beta) - \exp(-2i\beta)]/2h = (i/h) \sin(2\beta) \\ \frac{d^2}{dz^2} &\rightarrow G_2 = [\exp(2i\beta) - 2 - \exp(-2i\beta)]/h^2 = (2/h^2)(\cos(2\beta) - 1). \end{aligned} \quad (4.23)$$

Using the G-operators, Eq. (4.23), the discretized equation of Eq. (3.7) becomes

$$(\omega^2 G_0 + \omega G_1 + G_2)\tilde{v} = 0. \quad (4.24)$$

Solving Eq. (4.24), we obtain the numerical dispersion relation,

$$\omega = \frac{2 \sin(\beta)}{h} \left(v_0 \pm \sqrt{1 - v_0^2 \sin^2(\beta)} \right). \quad (4.25)$$

Given h (fixed the mesh resolution), we see that

- ω is real for all k if $v_0 < 1$.
- ω is complex for large k , more specifically $k > h/2 \arcsin(1/v_0)$, if $v_0 > 1$.
- For small k , meaning $k \rightarrow 0$, Eq. (4.25) is a good representation for the analytical dispersion relation, Eq. (4.22).

In this simple case of solving Eq. (4.24), one way to filter the spurious modes is to remove modes with high-oscillation. That is removing modes with wave number $k > h/2 \arcsin(1/v_0)$. However, this is not possible in general cases because Eq. (4.25) is only valid if finite-difference is used, and it requires the exact solution to the discretized problem Eq. (4.24) which is not available for non-constant velocity profile.

4.4.2 Convergence Test

To filter the spurious modes is by doing a "convergence test". Since the frequency Eq. (4.25) is changing with mesh resolution h . From Fig. 4.7 we see that only the true eigenmodes converge while the eigenvalues of spurious eigenmodes changes dramatically under different resolutions. By simply solving the discretized problem using spectral method under different mesh resolution, we can pick up the true eigenmodes by observing their convergence, and filter out the spurious eigenmodes which change dramatically with varying resolution.

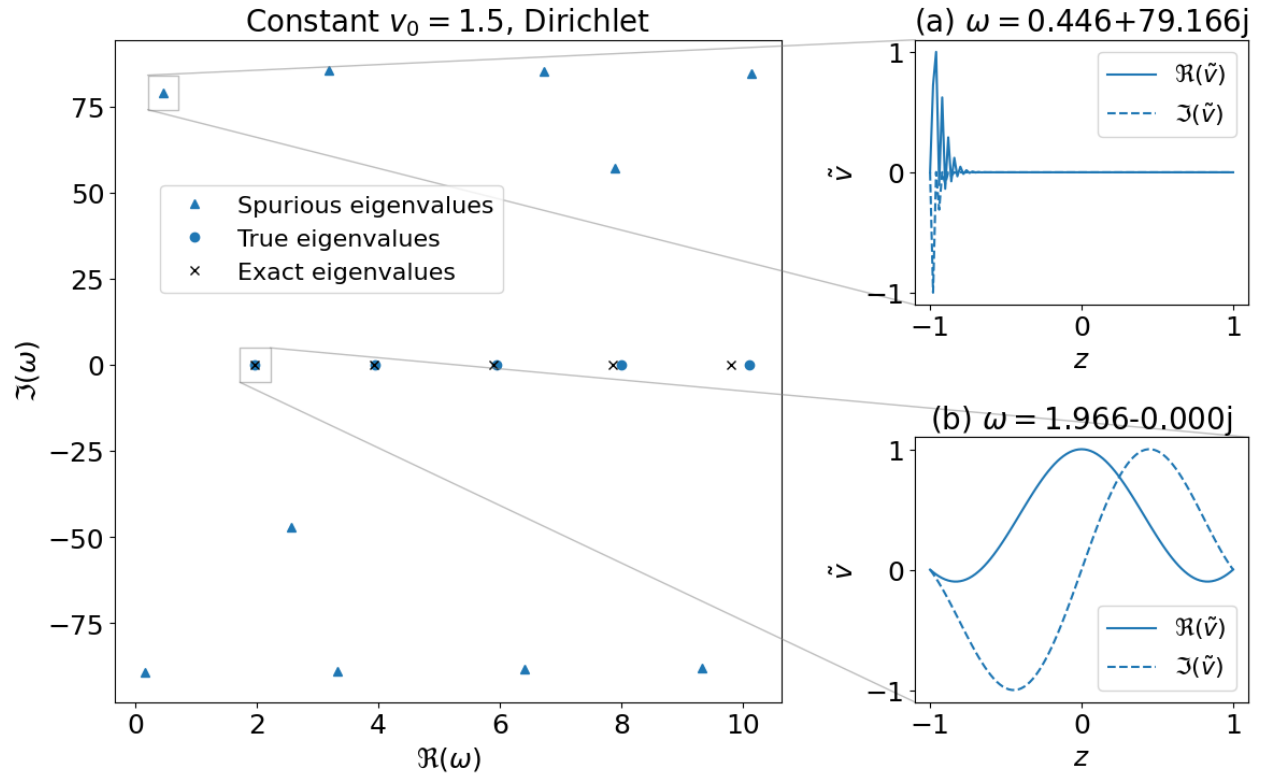


Figure 4.6: (a) Eigenfunction corresponding to a spurious eigenvalue, the oscillation frequency is so high that the wave length is about the grid size. (b) Eigenfunction corresponding to a true eigenvalue.

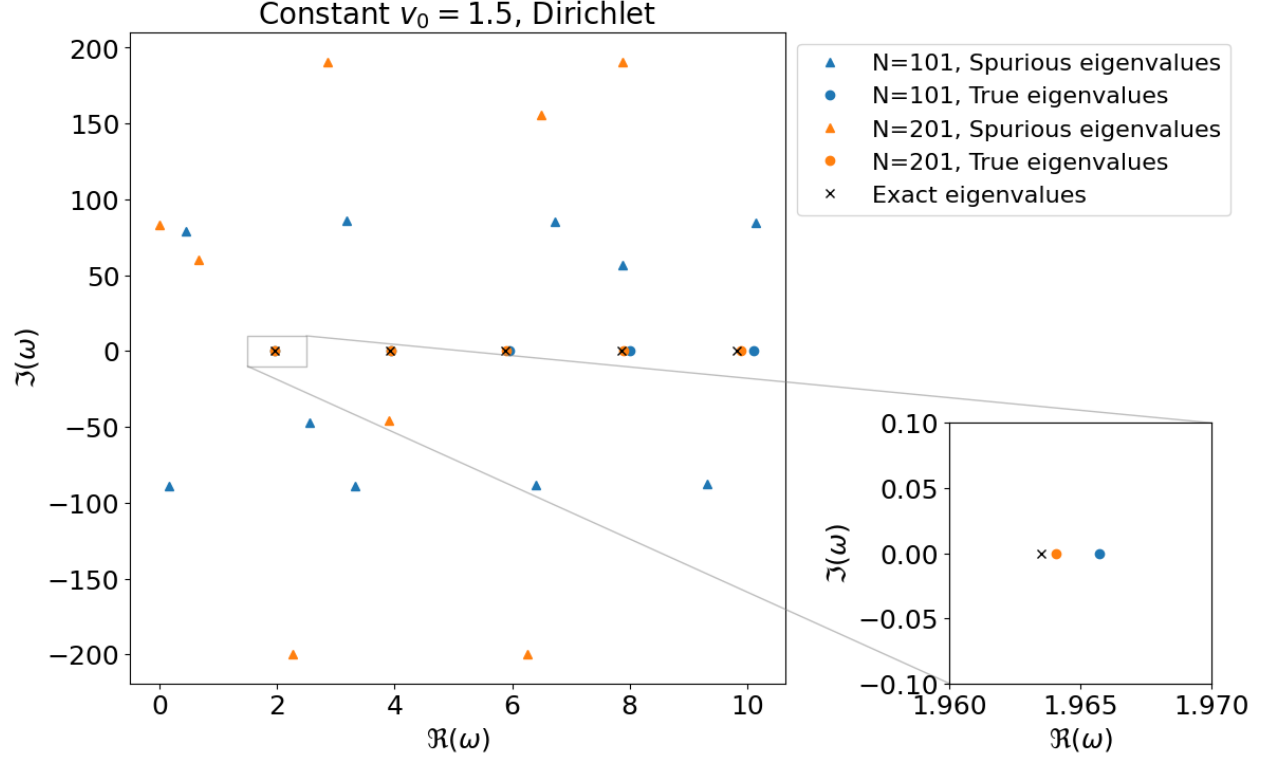


Figure 4.7: The figure shows eigenvalues under different resolutions. True eigenvalues converge to the analytical eigenvalues as resolution increases. Spurious eigenvalues diverges with no obvious pattern.

4.5 Plasma Flow with Constant Velocity Profile

In this section, we will compute the eigenmodes of the constant velocity problem, Eq. (3.7), with Dirichlet boundaries and the same problem with fixed-open boundaries, using spectral methods. More specifically, spectral-collocation and spectral-Galerkin methods will be employed. Then spurious modes will be filtered using the convergence test prescribed in previous section. Since we have already derived the exact solutions for the constant velocity cases in Sec. 3.3, we can ensure the accuracy and reliability of the numerical methods by comparing the numerical results to the analytical ones. The parameters of spectral methods are summarized in Table. (4.1). For spectral-collocation method, we use 101 points, and for spectral-Galerkin method we use 101 points and 30 basis functions.

Table 4.1: With Dirichlet boundary condition, all methods have good accuracy, so using 101 nodes in the region $[0, 1]$ is enough. For FE and SE methods, we use 50 basis functions.

	Collocation	Galerkin
M (number of points)	101	101
N (number of basis functions)		30

4.5.1 Constant Subsonic Velocity Case

Eq. (3.7) is a special case of a more general polynomial eigenvalue problem Eq. (3.6). The existence of the exact solution allows us to verify the correctness of each method's implementation. This also serves as a reference to the accuracy spectral methods can achieve.

In summary, the plasma flow constant subsonic velocity profile is stable in the magnetic nozzle under both boundary conditions, Dirichlet boundary and fixed-open boundary. If the velocity is supersonic, then the plasma flow is stable is the boundary is Dirichlet, and is unstable if the boundary is fixed-open.

Dirichlet Boundary

Fig. 4.8 shows that the eigenvalues obtained by spectral methods agree with the theoretical eigenvalues. Since the eigenvalues have almost zero imaginary parts, we consider the plasma flow with constant subsonic velocity in the magnetic nozzle with Dirichlet boundary is stable. Fig. 4.9 shows the absolute errors obtained by both spectral methods. The accuracy of spectral-Galerkin method drops faster than that of spectral-collocation method. Hence in this thesis, we only focus ourselves on the first 5 eigenmodes. Worth to mention, the eigenvalues are numbered by their real parts in ascending order. We order the eigenmodes by real parts of eigenvalues rather than the amplitudes of the eigenfunctions because the eigenfunctions are solutions to a second-order boundary value problem, their amplitudes can be normalized.

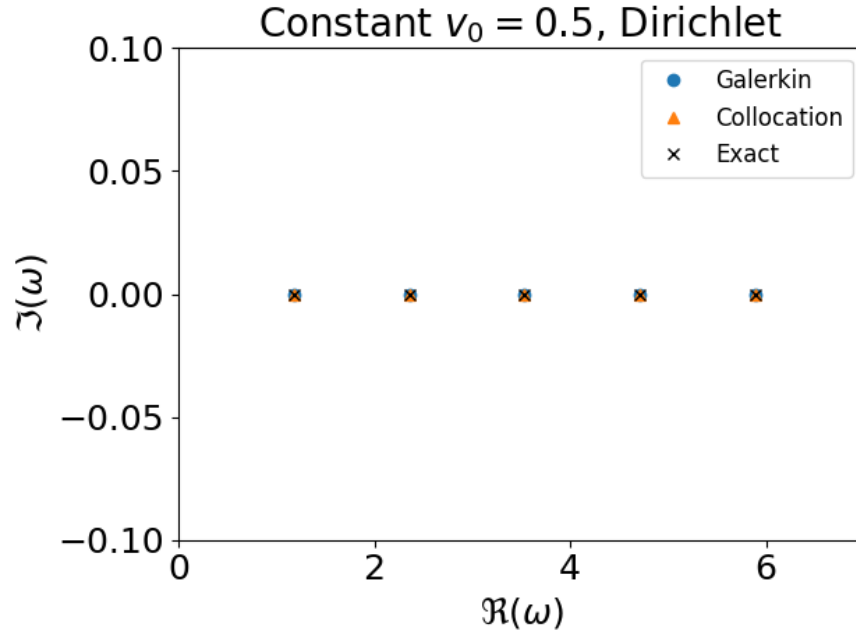


Figure 4.8: Showing the first five eigenvalues obtained by spectral-collocation and spectral-Galerkin methods. The plasma flow in the magnetic nozzle with constant subsonic velocity and Dirichlet boundary is stable. Spectral methods agree with exact eigenvalues.

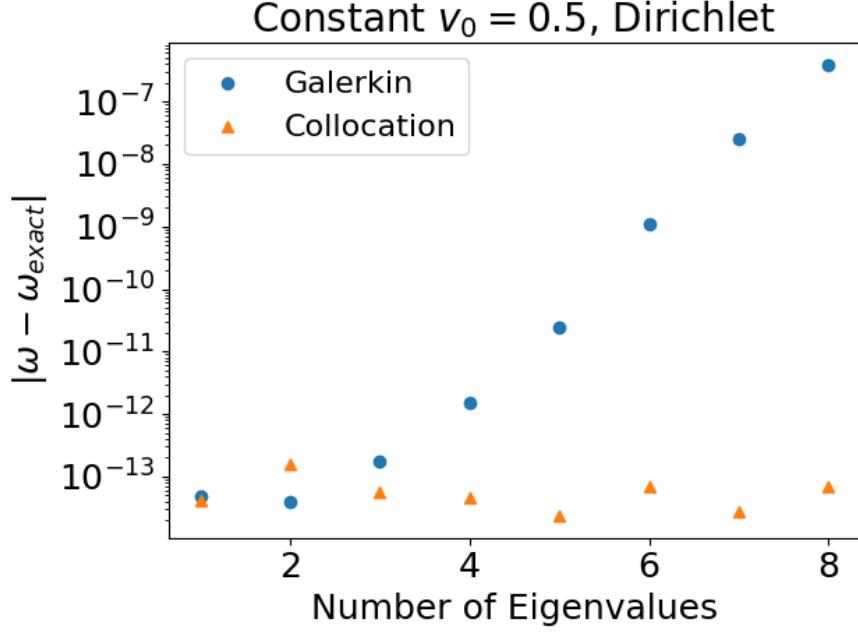


Figure 4.9: Showing the absolute errors of spectral-collocation and spectral-Galerkin methods. The accuracy of eigenvalues obtained by spectral-Galerkin method drops faster than that of spectral-collocation method. We only focus on the first eigenmodes.

Fixed-Open Boundary

As shown in Fig. 4.10 and Fig. 4.11, the first few numerical eigenvalues obtained by the spectral methods agree with the analytical eigenvalues. Again both spectral methods show good accuracy for the first few eigenmodes. Because the eigenvalues have negative imaginary parts, meaning the perturbations will exponential decay, so the plasma flow with constant subsonic velocity in the magnetic nozzle with fixed-open boundary is stable.

4.5.2 Constant Supersonic Velocity Case

In supersonic case, as predicted by Sec. 4.4.1, spurious modes occur. Convergence test was used to filter the spurious modes.

Dirichlet Boundary

The first five filtered eigenvalues obtained by the two spectral methods are shown in Fig. 4.8 and Fig. 4.13 shows us the relative error of each of them compare to the corresponding exact eigenvalues. Good agreement between the first few eigenvalues obtained from spectral methods and the theoretical eigenvalues is shown. However, we see that the accuracy of spectral-Galerkin method drops dramatically for larger eigenvalues. The plasma flow with constant supersonic velocity is stable in the magnetic nozzle with Dirichlet boundary.

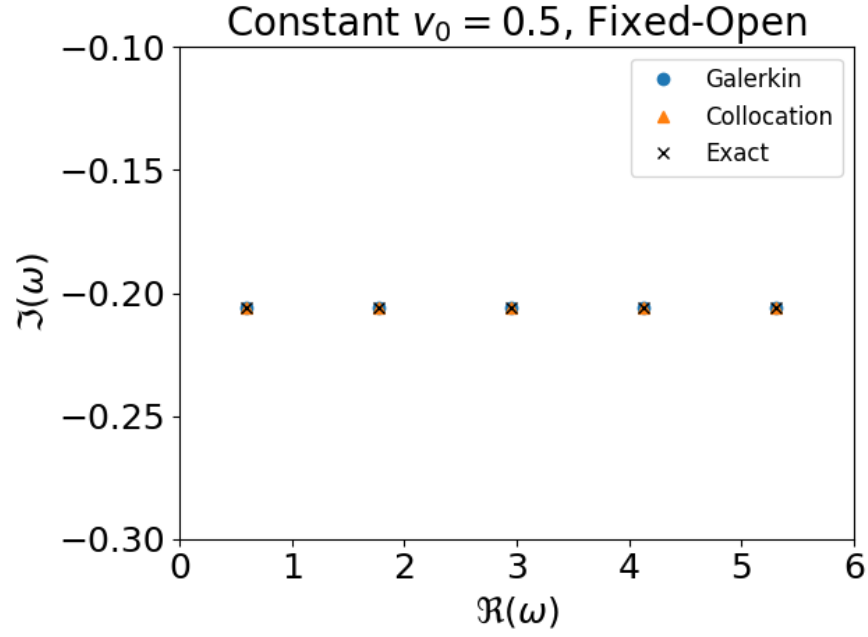


Figure 4.10: Showing the first five eigenvalues obtained by spectral-collocation and spectral-Galerkin methods. The plasma flow in the magnetic nozzle with constant subsonic velocity and fixed-open boundary is stable. Spectral methods agree with exact eigenvalues.

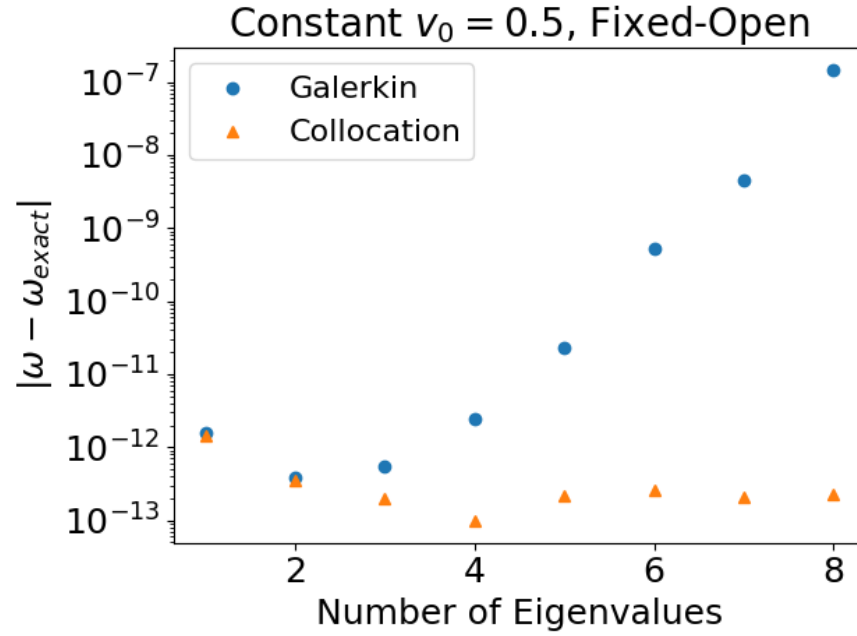


Figure 4.11: Showing the first five eigenvalues obtained by spectral-collocation and spectral-Galerkin methods. The plasma flow in the magnetic nozzle with constant subsonic velocity and fixed-open boundary is stable. Spectral methods agree with exact eigenvalues.

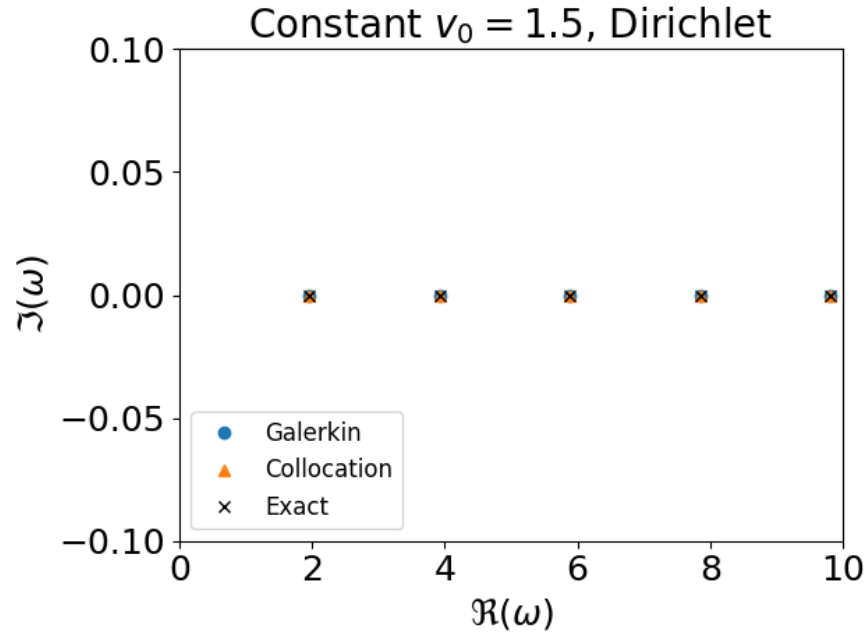


Figure 4.12: Showing the first five true eigenvalues obtained by spectral-collocation and spectral-Galerkin methods. The plasma flow in the magnetic nozzle with constant supersonic velocity and Dirichlet boundary is stable. Spectral methods agree with exact eigenvalues.

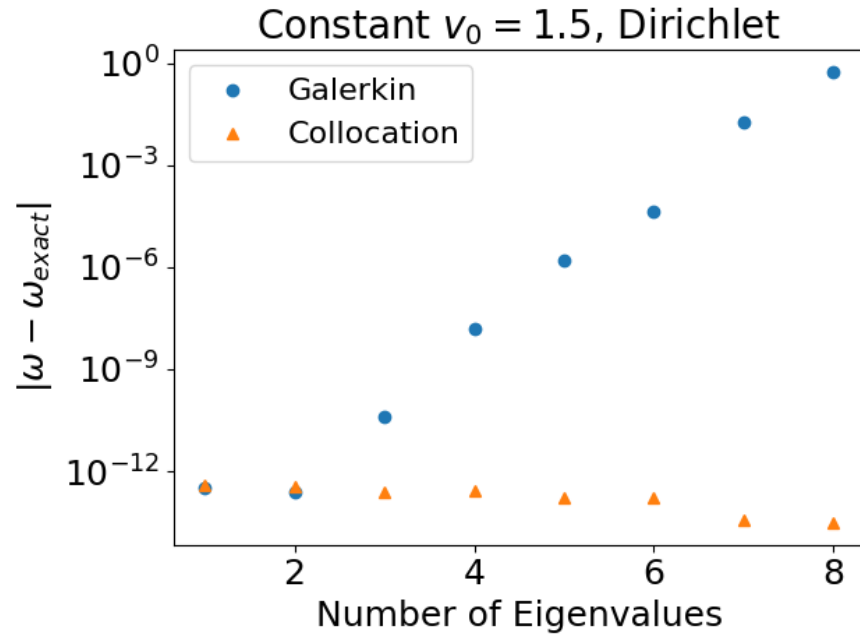


Figure 4.13: Showing the first five true eigenvalues obtained by spectral-collocation and spectral-Galerkin methods. The plasma flow in the magnetic nozzle with constant supersonic velocity and Dirichlet boundary is stable. Spectral methods agree with exact eigenvalues.

Fixed-Open Boundary

Fig. 4.14 shows us that plasma flow with constant supersonic velocity is unstable in the magnetic nozzle with fixed-open boundary. Fig. 4.15 shows relative error for the first five filtered eigenvalues obtained by different spectral methods. Again, we see that the accuracy of spectral-Galerkin method drops for larger eigenvalues.

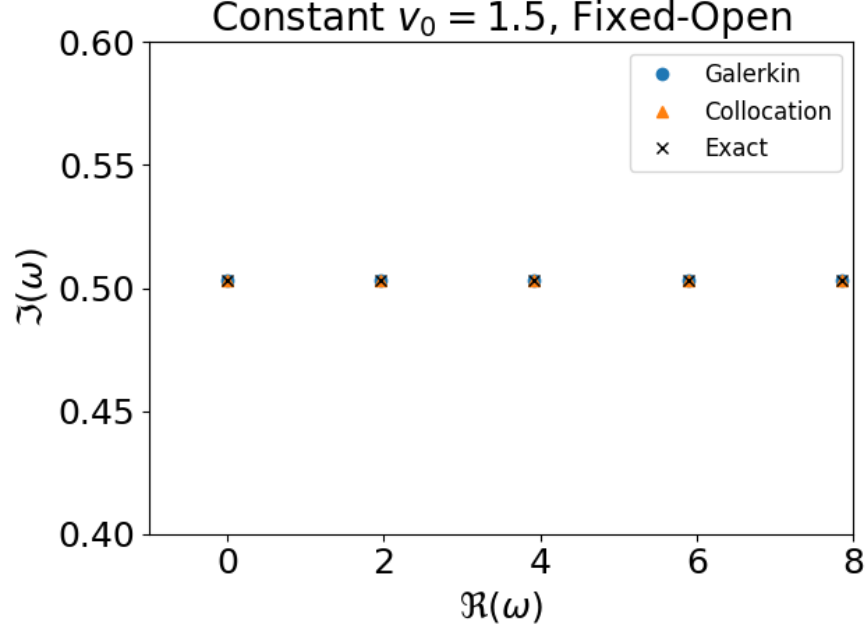


Figure 4.14: Showing the first five true eigenvalues obtained by spectral-collocation and spectral-Galerkin methods. The plasma flow in the magnetic nozzle with constant supersonic velocity and fixed-open boundary is unstable.

4.6 Plasma Flow with Spatially Varying Velocity Profiles

In previous section we have already verify the accuracy of spectral methods by comparing the numerical results to the analytical solutions to the eigenvalue problem with constant velocity plasma flow, Eq. (3.7). In this section we will apply spectral methods to the eigenvalue problem with spatially varying velocity profiles. That is Eq. (3.6) with Dirichlet boundary and fixed-open boundary conditions. The parameters for spectral methods are the same as Table. 4.1.

4.6.1 Subsonic Case

In this case, the plasma flows with subsonic velocity. The velocity profile is spatially varying and will reach its maximum 0.5 Mach at the nozzle throat $z = 0$. The velocity profile is the orange line shown in Fig. 2.4. When applying spectral methods, no spurious modes were found in subsonic case. Similar to the case with constant velocity profile, we experiment with two boundary conditions: Dirichlet boundary and fixed-open

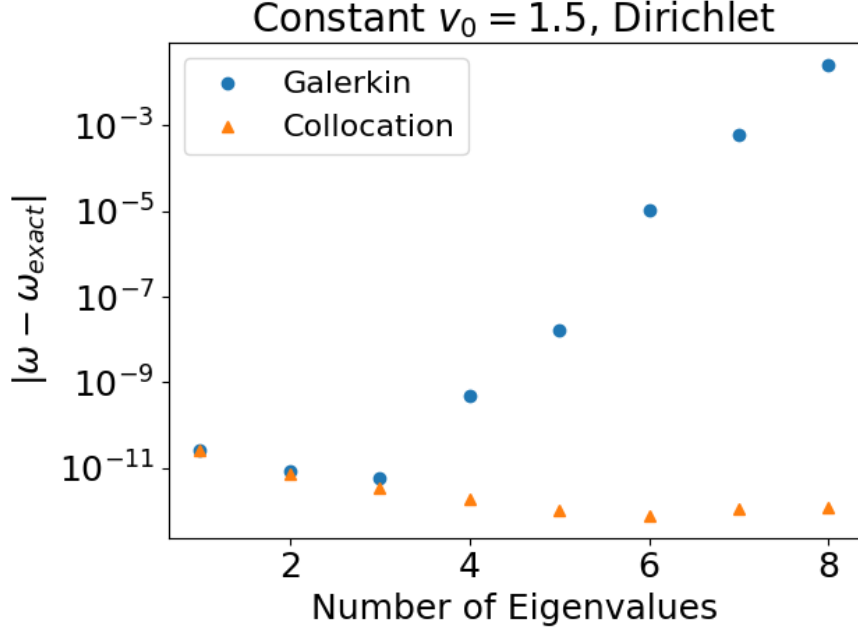


Figure 4.15: Showing the first five true eigenvalues obtained by spectral-collocation and spectral-Galerkin methods. The plasma flow in the magnetic nozzle with constant supersonic velocity and fixed-open boundary is unstable.

boundary. We found that the plasma flow is stable when the boundary condition is Dirichlet and is stable (except ground mode) when using fixed-open boundary.

Dirichlet Boundary

With Dirichlet boundary condition, $\tilde{v}(\pm 1) = 0$, the subsonic plasma flow in magnetic nozzle is stable. Fig. 4.16 shows the first five eigenvalues obtained by different spectral methods. The two methods, spectral-collocation and spectral-Galerkin, agree with each other reasonably well so the eigenvalues are overlapped on the figure. These eigenvalues has zero imaginary parts (to be more specific, $|\text{Im}\{\omega\}| < 10^{-13}$), meaning that the subsonic plasma flow in the magnetic nozzle is stable.

Fixed-Open Boundary

Fig. 4.17 shows the first five eigenvalues obtained by the two spectral methods. The results agree with each other reasonably well so the eigenvalues are overlapped. We see that the eigenvalues have negative imaginary parts (except ground mode), indicating that the subsonic plasma flow in the nozzle with fixed-open boundary is stable (except ground mode).

4.6.2 Supersonic Case

In this subsection, we are going to investigate the instability of supersonic plasma flow in the magnetic nozzle. The velocity profile is the purple line shown in Fig. 2.4. The plasma flow reaches its minimum velocity 1.5

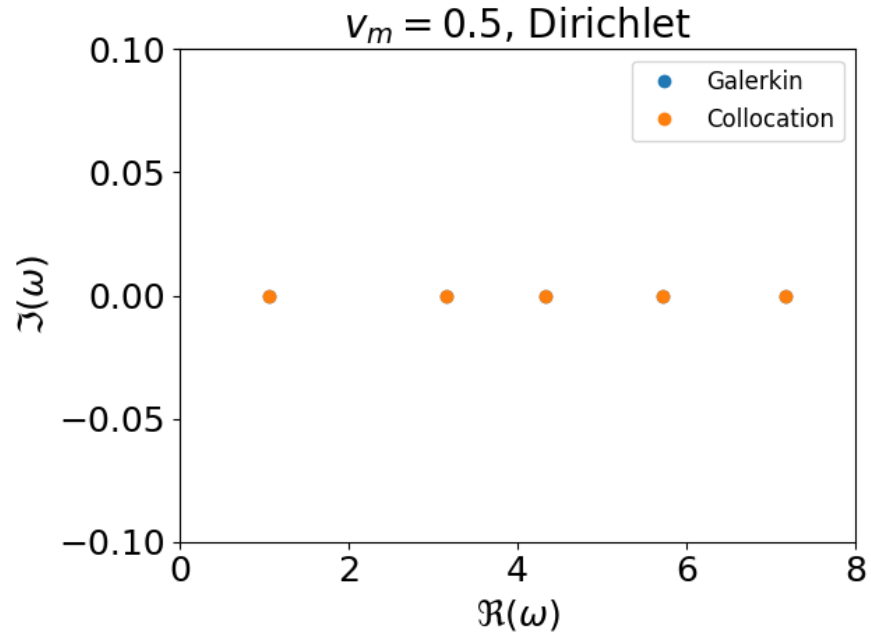


Figure 4.16: Showing the first five eigenvalues obtained by spectral-collocation and spectral-Galerkin method. This indicates that the subsonic plasma flow in magnetic nozzle with Dirichlet boundary is stable. Two methods agree with each other reasonably well the eigenvalues are overlapped.

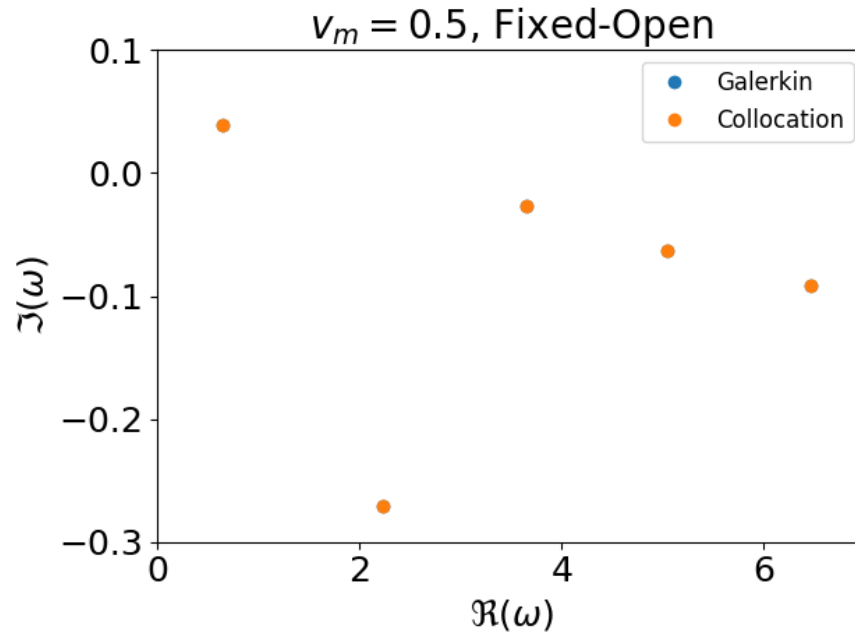


Figure 4.17: Showing the first five eigenvalues obtained by spectral-collocation and spectral-Galerkin method. This indicates that the subsonic plasma flow in magnetic nozzle with fixed-open boundary is stable (except ground mode). Two methods agree with each other reasonably well the eigenvalues are overlapped.

Mach at the nozzle throat $z = 0$. When applying spectral methods, spurious modes occur and we need to apply convergence test to extract the true eigenvalues. We found that the supersonic plasma flow is stable when the Dirichlet boundary condition was used, and is unstable the boundary is fixed-open.

Dirichlet Boundary

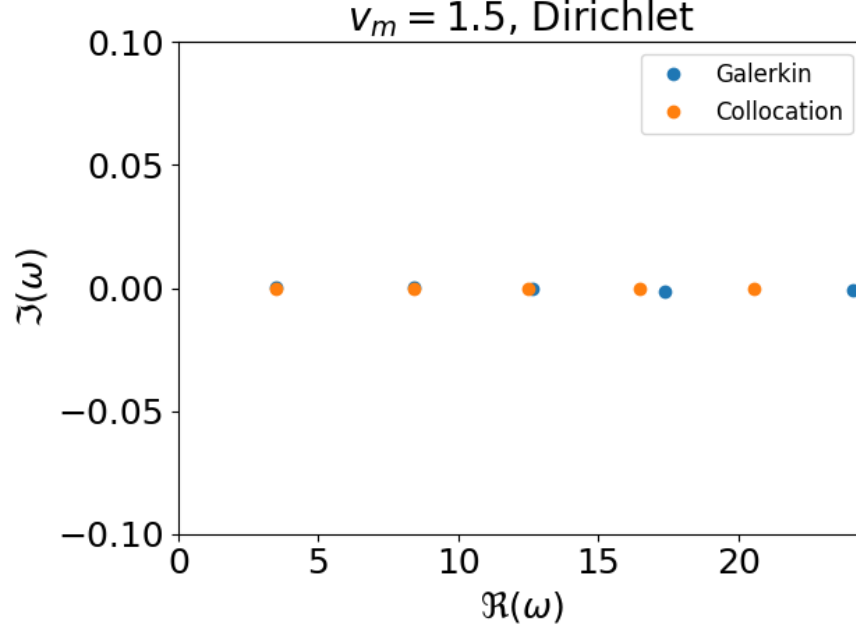


Figure 4.18: Showing the first five true eigenvalues obtained by spectral-collocation and spectral-Galerkin method. This indicates that the supersonic plasma flow in magnetic nozzle with Dirichlet boundary is stable. Two methods agree well on the first 3 eigenmodes, and starts to deviate from each other after that. Nevertheless, these eigenvalues have near-zero imaginary parts. The eigenvalues obtained by spectral-Galerkin have imaginary parts within $\pm 10^{-3}$ and the eigenvalues obtained by spectral-collocation have imaginary parts within $\pm 10^{-13}$.

As shown Fig. 4.18, the two spectral methods agree well on the first three eigenvalues but starts to have noticeable difference afterward. Despite having different real parts in the eigenvalues, these eigenvalues all have near-zero imaginary parts. The imaginary parts of the eigenvalues obtained by spectral-collocation method are within $\pm 10^{-13}$, and the imaginary parts of the eigenvalues obtained by spectral-Galerkin method are within $\pm 10^{-3}$. This suggests the supersonic plasma flow in the magnetic nozzle with Dirichlet boundary is stable.

Fixed-Open Boundary

In Fig. 4.19, we see that the two spectral methods agree well on the first three eigenvalues but starts to have noticeable difference afterward. Despite having different eigenvalues after the third eigenvalue, these eigenvalues all have positive imaginary parts, suggesting the supersonic plasma flow in the magnetic nozzle with fixed-open boundary is unstable.

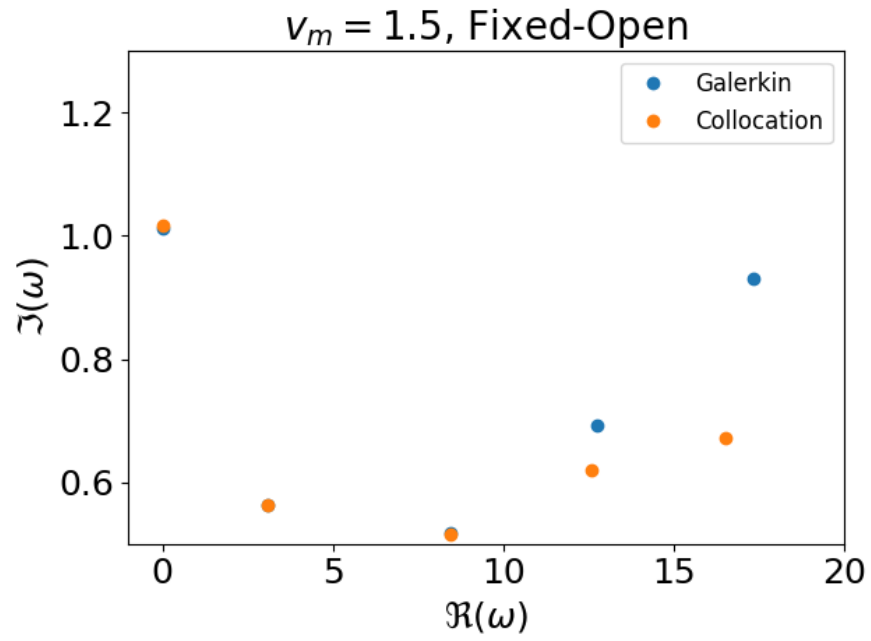


Figure 4.19: Showing the first five true eigenvalues obtained by spectral-collocation and spectral-Galerkin method. Two methods agree well on the first three modes, and start to have significant difference after that. Despite having some different eigenvalues, these eigenvalues all have positive imaginary parts, suggesting that the supersonic plasma flow in the magnetic nozzle with fixed-open boundary is unstable.

5 Singular Perturbation

When dealing with the accelerating velocity profile, spectral methods struggle to yield meaningful results because of the singularity at the nozzle throat ($z = 0$). This chapter is dedicated to analyze the polynomial eigenvalue problem with accelerating velocity profile. We start by showing the existence of the singularity of Eq. (3.6), and how spectral methods introduced in previous chapter failed to resolve solutions. Then we will discuss the concept of singular perturbation and will pick up regular solutions to Eq. (3.6) near the nozzle throat $z = 0$ using Frobenius method. Finally, we will introduce shooting method and use it together with the regular solutions to find eigenmodes.

5.1 Presence of Singularity in Transonic Cases

In order to see the existence of the singularity, we rearrange the terms the polynomial eigenvalue problem, Eq. (3.6),

$$\begin{aligned}
 & (1 - v_0^2) \frac{\partial^2 \tilde{v}}{\partial z^2} \\
 & + \left[2i\omega v_0 - \left(3v_0 + \frac{1}{v_0} \right) \frac{\partial v_0}{\partial z} \right] \frac{\partial \tilde{v}}{\partial z} \\
 & + \left[\omega^2 + 2i\omega \frac{\partial v_0}{\partial z} - \left(1 - \frac{1}{v_0^2} \right) \left(\frac{\partial v_0}{\partial z} \right)^2 - \left(v_0 + \frac{1}{v_0} \right) \frac{\partial^2 v_0}{\partial z^2} \right] \tilde{v} \\
 & = 0.
 \end{aligned} \tag{5.1}$$

This is a second order ordinary differential equation defined on region $[-1, 1]$.

For transonic (accelerating and decelerating) velocity profiles (Fig. 2.4), the plasma flow is at sonic point at the throat of the nozzle, $v_0(0) = 1$. Therefore, the highest order term vanishes at $z = 0$. It is a singular point, and it is the cause of the failure of spectral method, see Fig. (5.1). Spectral method is unable to resolve meaningful eigenfunctions, the eigenfunctions are squeezed together at $z = 0$, hence resulting in wrong eigenvalues.

5.2 Expansion at Singularity

In this section, we will try to extract the regular solutions to Eq. (5.1) using Frobenius method. It is speculated such regular solutions exist. Further analysis and numerical simulations also validate the existence of such solutions. In order to find them, we need to expand terms in Eq. (5.1) about the singularity.

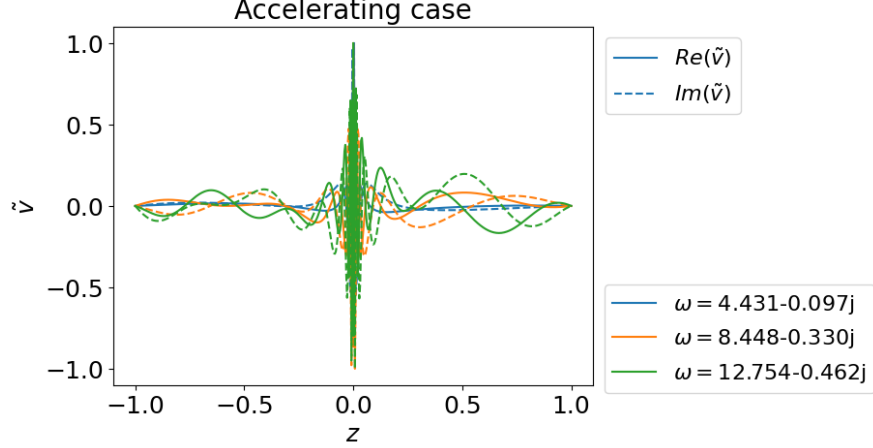


Figure 5.1: An attempt to solve the polynomial eigenvalue problem, Eq. (3.6) using finite-difference. Eigenfunctions are squeezed to the center of the nozzle due to the existence of the singularity at $z = 0$.

The first task is to linearize the terms with v_0 about the singularity. The linearization of $v_0(z) = 1 + v'_0(0)z$ is a good approximation to the original function $v_0(z)$ because the transonic velocity profiles are linear in the neighborhood of $z = 0$, as we can see from Fig. 2.4. Therefore, through some simple algebra we obtain,

$$\begin{aligned}
 1 - v_0^2 &= -2v'_0(0)z \\
 3v_0 + \frac{1}{v_0} &= 4 + 2v'_0(0)z \\
 1 - \frac{1}{v_0^2} &= 2v'_0(0)z \\
 v_0 + \frac{1}{v_0} &= 2.
 \end{aligned} \tag{5.2}$$

Then Eq. (5.1) becomes

$$\begin{aligned}
 &-2v'_0(0)z \frac{\partial^2 \tilde{v}}{\partial z^2} \\
 &+ [2i\omega - 4v'_0(0) + (2i\omega - 2v'_0(0))z] \frac{\partial \tilde{v}}{\partial z} \\
 &+ [\omega^2 + 2i\omega v'_0(0) - 2v''_0(0) - 2v'_0(0)^3 z] \tilde{v} = 0.
 \end{aligned} \tag{5.3}$$

In fact, we can further simplify the equation by dropping all z terms except the first term (second-order derivative term). It can be shown that dropping the z terms except the second derivative in Eq. (5.3) does not affect the first order correction (\tilde{v} is the same up to z term), it is an acceptable approximation.

$$-2v'_0(0)z \frac{\partial^2 \tilde{v}}{\partial z^2} + (2i\omega - 4v'_0(0)) \frac{\partial \tilde{v}}{\partial z} + (\omega^2 + 2i\omega v'_0(0) - 2v''_0(0)) \tilde{v} = 0. \tag{5.4}$$

Dividing by the first coefficient, we have

$$z \frac{\partial^2 \tilde{v}}{\partial z^2} + a \frac{\partial \tilde{v}}{\partial z} + b \tilde{v} = 0, \tag{5.5}$$

where

$$a = \frac{2i\omega - 4v'_0(0)}{-2v'_0(0)}; \quad b = \frac{\omega^2 + 2i\omega v'_0(0) - 2v''_0(0)}{-2v'_0(0)}. \tag{5.6}$$

Use Frobenius method, we assume the velocity perturbation can be written as a power series in z , $\tilde{v} = \sum_{n \geq 0} c_n z^{n+r}$. By substituting the power series into Eq. (5.5) we have

$$\sum_{n \geq 0} (n+r)(n+r+1)c_n z^{n+r-1} + a(n+r)c_n z^{n+r-1} + bc_n z^{n+r} = 0. \quad (5.7)$$

Shift the power of the last term we get

$$\sum_{n \geq 0} (n+r)(n+r+1)c_n z^{n+r-1} + a(n+r)c_n z^{n+r-1} + \sum_{n \geq 1} bc_{n-1} z^{n+r-1} = 0. \quad (5.8)$$

Setting $n = 0$, we get the indicial equation

$$c_0 r(r-1) + c_0 ar = 0 \Rightarrow c_0 r(r+a-1) = 0. \quad (5.9)$$

We get two different roots, $r = 0$ and $r = 1 - a$. They correspond to finite solution and diverging solution near the singularity, respectively.

The coefficients are given by recurrence relation

$$(n+r)(n+r-1)c_n + a(n+r)c_n + bc_{n-1} = 0 \Rightarrow c_n = \frac{-bc_{n-1}}{(n+r)(n+r-1+a)}. \quad (5.10)$$

Solving this relation we get explicit expression for c_n , $n \in \mathbb{N}$,

$$\begin{aligned} c_n &= \frac{(-1)^n b^n c_0}{\prod_{k=0}^{n-1} (n+r-k)(n+r-1+a-k)} \\ &= (-1)^n b^n c_0 \frac{\Gamma(r+1)\Gamma(r+a)}{\Gamma(n+r+1)\Gamma(n+r+a)}, \end{aligned} \quad (5.11)$$

where Γ is the Gamma function. Therefore, we successfully extracted the regular solution (corresponding to the root $r = 0$) in the form of power series,

$$\begin{aligned} \tilde{v} &= c_0 + c_1 z + c_2 z^2 + \dots \\ &= c_0 - c_0 \frac{b}{a} z + c_0 \frac{b^2}{2a(1+a)} z^2 + \dots \end{aligned} \quad (5.12)$$

It is worth to mention that the diverging solution (corresponding to the root $r = a$) goes like

$$\tilde{v}(z) \sim z^{1-a} = z^{-1-\omega_i/v'_0(0)} z^{i\omega_r/v'_0(0)}, \quad (5.13)$$

where $\omega = \omega_r + i\omega_i$. Meaning that the divergent solution will start to diverge when $\omega_i > -v'(0)$.

5.3 Shooting Method

The existence of divergent solutions makes the problem hard to solve numerically using spectral method. One workaround involves manually selecting regular solutions during the numerical process. The shooting method, a suitable numerical technique, is capable of incorporating information of regular solutions. In other words, \tilde{v} and its derivatives at the nozzle throat $z = 0$ can be incorporate into the numerical process. Due to

this restriction of singularity, we are not allowed to impose any boundary condition at the nozzle exit, $z = 1$, anymore because the information of the regular solution already serve as a boundary condition.

Our polynomial eigenvalue problem, Eq. (3.6), can be formulated in the following form,

$$f(z, \tilde{v}, \tilde{v}', \tilde{v}''; \omega) = 0 \quad -1 \leq z \leq 0, \quad \tilde{v}(-1) = 0, \tilde{v}(0) = 1, \quad (5.14)$$

where f is the function defined on the left of equal sign of Eq. (3.6). The task for shooting method is to find eigenvalues ω and their corresponding eigenfunctions \tilde{v} such that $f = 0$ holds. Meanwhile, the eigenfunctions must satisfy the boundary conditions at the entrance $z = -1$ and at the throat $z = 0$. After obtaining the solutions, we can extend the solution to $z = 1$. The extension is unique, more details will be explained later.

However, to make the formulation more suitable for numerical computation, we would like to rewrite the second differential equation as two first order differential equations,

$$\frac{d}{dz} \tilde{\mathbf{u}} = \mathbf{f}(\tilde{\mathbf{u}}, z; \omega), \quad -1 \leq z \leq 0, \quad \tilde{v}(-1) = 0, \tilde{v}(0) = 1. \quad (5.15)$$

Let $\tilde{\mathbf{u}} = [\tilde{v}, \tilde{u}]^T$, the polynomial eigenvalue problem is transformed to

$$\begin{aligned} \tilde{v}' &= \tilde{u} \\ \tilde{u}' &= \frac{-1}{1 - v_0^2} \left[\omega^2 \tilde{v} + 2i\omega(v_0 + v_0' \tilde{v}) - \left(3v_0 - \frac{1}{v_0} \right) v_0' \tilde{u} - \left(1 - \frac{1}{v_0^2} \right) (v_0')^2 \tilde{v} - \left(v_0 + \frac{1}{v_0} v_0'' \tilde{v} \right) \right]. \end{aligned}$$

Together with two boundary conditions, $\tilde{v}(-1) = 0$ and $\tilde{v}(0) = 1$. The task of shooting method remains the same: find $\tilde{\mathbf{u}}$ and ω such that $d\tilde{\mathbf{u}}/dz = \mathbf{f}$ and \tilde{v} must satisfy the boundary conditions.

Suppose ω is given. We can find $\tilde{\mathbf{u}}(-1)$ by solving the following I.V.P. with initial conditions at $z = 0$, and hence $\tilde{v}(-1)$ by applying 4th order Runge-Kutta method (RK4) to the following IVP,

$$\frac{d}{dz} \tilde{\mathbf{u}} = \mathbf{f}(\tilde{\mathbf{u}}, z; \omega), \quad -1 \leq z \leq 0, \quad \tilde{\mathbf{u}}(0) = \begin{bmatrix} \tilde{v}(0) \\ \tilde{u}(0) \end{bmatrix}, \quad \frac{d}{dz} \tilde{\mathbf{u}}(0) = \begin{bmatrix} \tilde{v}'(0) \\ \tilde{u}'(0) \end{bmatrix}. \quad (5.16)$$

The information of the regular solution is built into the numerical process by setting the initial conditions,

$$\begin{aligned} \tilde{\mathbf{u}} &= \begin{bmatrix} \tilde{v}(0) \\ \tilde{u}(0) \end{bmatrix} = \begin{bmatrix} c_0 \\ c_1 \end{bmatrix} = \begin{bmatrix} 1 \\ (2i\omega v_0' - 2v_0'')/2v_0' \end{bmatrix} \\ \frac{d}{dz} \tilde{\mathbf{u}} &= \begin{bmatrix} \tilde{v}'(0) \\ \tilde{u}'(0) \end{bmatrix} = \begin{bmatrix} \tilde{u}(0) \\ c_2 \end{bmatrix} = \begin{bmatrix} (2i\omega v_0' - 2v_0'')/2v_0' \\ -((v_0')^4 + (2i\omega v_0' + (v_0')^2 - v_0'')(i\omega v_0' - v_0''))/(v_0'(2i\omega - 6v_0')) \end{bmatrix}. \end{aligned} \quad (5.17)$$

The coefficients c_0 , c_1 , and c_2 are obtained from the power series expansion of \tilde{v} near $z = 0$, Eq. (5.12).

The above step can be abstracted as a function, $h(\omega) = \tilde{v}(-1)$. This function takes in a variable ω , and it outputs the value $\tilde{v}(-1)$ by applying RK4 to the I.V.P. Eq. (5.16). We then apply root finding algorithm to this function h to find ω such that \tilde{v} satisfies the boundary condition at the entrance, $h(\omega) = \tilde{v}(-1) = 0$. This process can be viewed as trying to land a projectile at certain location, i.e., $\tilde{v}(-1) = 0$, by adjusting the shooting angle, i.e., ω , hence the name shooting method.

After finding ω , we can extend the numerical solution \tilde{v} to the region $[0, 1]$. We simply apply RK4 to the following I.V.P.

$$\frac{d}{dz}\tilde{\mathbf{u}} = \mathbf{f}(\tilde{\mathbf{u}}, z; \omega), \quad 0 \leq z \leq 1, \quad \tilde{\mathbf{u}}(0) = \begin{bmatrix} \tilde{v}(0) \\ \tilde{u}(0) \end{bmatrix}, \quad \frac{d}{dz}\tilde{\mathbf{u}}(0) = \begin{bmatrix} \tilde{v}'(0) \\ \tilde{u}'(0) \end{bmatrix}. \quad (5.18)$$

Since ω is already found, the initial conditions are given. The function \mathbf{f} is continuous in z on $[0, 1]$ and is Lipschitz in $\tilde{\mathbf{u}}$ due to the fact that \mathbf{f} is continuous on a compact region $[0, 1]$. Hence, the solution to this I.V.P. exists and is unique.

5.4 Plasma Flow with Accelerating Velocity Profile

Starting from the singular point, we shoot the regular solution to the left boundary. We find the set of eigenvalues such that $\tilde{v}(-1) = 0$. With these eigenvalues, we can extend the solution to the supersonic region $(0, 1]$. The first few eigenmodes are drawn in Fig. 5.2. The eigenmodes indicates that the accelerating plasma flow is stable.

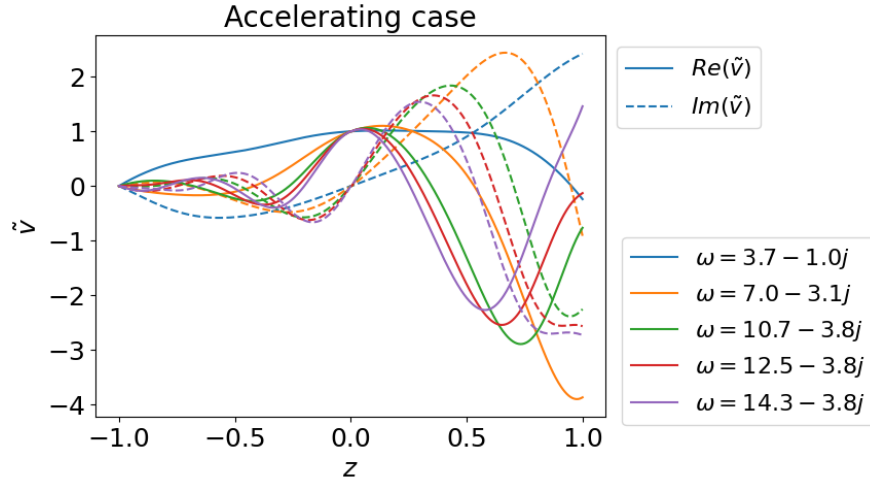


Figure 5.2: Showing the first 5 eigenmodes, they are stable.

6 Discussion

6.1 Summary of the Results

In the first chapter we introduced various concepts including plasma, spectral instability and magnetic nozzle. We also briefly discussed the general procedure for finding the spectral instability of PDEs, and the relationship between spectral instability and plasma instability. In Chap. 2, we derived the governing fluid equations for plasma flow in a magnetic nozzle and explored the equilibrium plasma flow. Following that, in Chap. 3, by reducing the system of two first-order PDEs into a single second-order PDE, the problem simplifies to a so-called polynomial eigenvalue problem. In Chap. 4 we discretized the Eq. (3.6) using Chebyshev differentiation matrix and Legendre polynomials, converting the polynomial eigenvalue problem into an algebraic eigenvalue problem. This allows us to apply well-developed numerical methods for obtaining eigenvalues and eigenfunctions. During this process, convergence test was applied to eliminate the spurious modes from spectral pollution. While spectral methods can handle most cases, i.e. subsonic and supersonic plasma flows, they fail to resolve meaningful eigenvalues and eigenfunctions for the accelerating plasma flow due to the existence of singularity at the sonic point in the nozzle throat. In Chap. 5, we addressed this issue. Frobenius method was used to pick up regular solutions passing through the nozzle throat and shooting method was applied on the regular solutions to find the eigenvalues and eigenfunctions.

For the subsonic flow, it is stable under Dirichlet boundary condition. It is also stable under fixed-open boundary, except for ground mode when velocity is nonuniform. For the supersonic flow, it is stable when Dirichlet boundary condition is applied, and unstable when the boundary condition is fixed-open. The flow with accelerating velocity profile is stable, assuming there is no velocity perturbation at the entrance of the nozzle. The results are summarized below.

- Subsonic plasma flow is stable under Dirichlet boundary and is also stable (except ground mode with non-constant velocity profile) under Fixed-Open boundary.
- Supersonic plasma flow is stable under Dirichlet boundary but unstable under fixed-open boundary condition.
- Accelerating plasma flow is stable with Dirichlet boundary at the entrance.

6.2 Limitations and Future Work

6.2.1 Spectral Method

The spectral method suffers the spectral pollution. For now there is no automatic ways to filter spurious modes other than doing convergence test and pick up the convergent eigenvalues manually. We believe there is a discretization scheme that is spectral pollution free. We made such optimistic guess based on the following example. Let's transform Eq. 3.7 with Dirichlet boundary condition $\tilde{v}(\pm 1) = 0$ to its normal form, that is

$$u''(z) + r(z)u(z) = 0, \quad u(\pm 1) = 0. \quad (6.1)$$

By doing the following transformation of variables

$$u(z) = \exp\left(\frac{iv_0\omega}{1-v_0^2}\right)\tilde{v}(z); \quad r(z) = \frac{\omega^2}{(1-v_0^2)^2}. \quad (6.2)$$

If we apply spectral methods to this problem, we observed no spurious modes in the spectrum. Meaning that this transformed problem is spectral pollution free. Based on this observation, we believe there exists a transformation of the polynomial eigenvalue problem such that it is spectral pollution free when applying spectral methods.

6.2.2 Shooting Method

The shooting method is not exhaustive due to the nature of root finding algorithm. A root can only be found if the initial guess of the root is close enough to the actual root. To work around this issue, we have to perform a grid search on the complex plane. This way we can only survey the low frequency region due to finite computing resources. The conclusion for the instability of accelerating plasma flow is true only for low frequency region. We believe there are different discretizations allowing us to overcome the singularity without picking up regular solutions manually using Frobenius method.

References

- [1] F. F. Chen. *Introduction to Plasma Physics and Controlled Fusion*. Springer International Publishing, Cham, 2016. ISBN 978-3-319-22308-7 978-3-319-22309-4. doi: 10.1007/978-3-319-22309-4. URL <http://link.springer.com/10.1007/978-3-319-22309-4>.
- [2] Typical plasmas. *Contemporary Physics Education Project*. URL <https://www.cpepphysics.org/elementor-1179/>. Accessed: March 26, 2024.
- [3] S.-Y. Ha, T. Ha, and C.-O. Hwang, et al. Nonlinear instability of the one-dimensional Vlasov-Yukawa system. *Journal of Mathematical Physics*, 52(3):033301, March 2011. ISSN 0022-2488, 1089-7658. doi: 10.1063/1.3559005. URL <http://aip.scitation.org/doi/10.1063/1.3559005>.
- [4] M. Beck. Spectral Stability and Spatial Dynamics in Partial Differential Equations. 67(04):1. ISSN 0002-9920. doi: 10.1090/noti2070. URL <http://dx.doi.org/10.1090/noti2070>.
- [5] A. I. Smolyakov, A. Sabo, and P. Yushmanov, et al. On quasineutral plasma flow in the magnetic nozzle. *Physics of Plasmas*, 28(6):060701, June 2021. ISSN 1070-664X, 1089-7674. doi: 10.1063/5.0050226. URL <https://aip.scitation.org/doi/10.1063/5.0050226>.
- [6] T. Aikawa. The stability of spherically symmetric accretion flows. *Astrophys Space Sci*, 66(2):277–285, December 1979. ISSN 0004-640X, 1572-946X. doi: 10.1007/BF00650003. URL <http://link.springer.com/10.1007/BF00650003>.
- [7] H. Bondi. On Spherically Symmetrical Accretion. *Monthly Notices of the Royal Astronomical Society*, 112(2):195–204, April 1952. ISSN 0035-8711, 1365-2966. doi: 10.1093/mnras/112.2.195. URL <https://academic.oup.com/mnras/article-lookup/doi/10.1093/mnras/112.2.195>.
- [8] E. Keto. Stability and solution of the time-dependent Bondi–Parker flow. *Monthly Notices of the Royal Astronomical Society*, 493(2):2834–2840, April 2020. ISSN 0035-8711, 1365-2966. doi: 10.1093/mnras/staa529. URL <https://academic.oup.com/mnras/article/493/2/2834/5743434>.
- [9] M. Velli. From supersonic winds to accretion: Comments on the stability of stellar winds and related flows. 432:L55, . ISSN 0004-637X. doi: 10.1086/187510. URL <http://dx.doi.org/10.1086/187510>.
- [10] M. Velli. Hydrodynamics of the Solar Wind Expansion. 277(1/2):157–167, . ISSN 0004-640X. doi: 10.1023/a:1012237708634. URL <http://dx.doi.org/10.1023/A:1012237708634>.
- [11] L. Del Zanna, M. Velli, and P. Londrillo. Dynamical response of a stellar atmosphere to pressure perturbations: numerical simulations. *Astronomy & Astrophysics*.
- [12] R. F. Stellingwerf and J. Buff. Stability of astrophysical gas flow. I - Isothermal accretion. *ApJ*, 221: 661, April 1978. ISSN 0004-637X, 1538-4357. doi: 10.1086/156070. URL <http://adsabs.harvard.edu/doi/10.1086/156070>.
- [13] D. D. Ryutov, P. N. Yushmanov, and D. C. Barnes, et al. Divertor for a linear fusion device. page 060003, Newport Beach, CA, USA, 2016. doi: 10.1063/1.4944029. URL <http://aip.scitation.org/doi/abs/10.1063/1.4944029>.
- [14] I. D. Kaganovich, A. Smolyakov, and Y. Raitses, et al. Physics of $E \times B$ discharges relevant to plasma propulsion and similar technologies. *Physics of Plasmas*, 27(12):120601, 12 2020.
- [15] J. Shen, T. Tang, and L.-L. Wang. *Spectral Methods*. Springer Berlin Heidelberg. ISBN 9783540710400. doi: 10.1007/978-3-540-71041-7. URL <http://dx.doi.org/10.1007/978-3-540-71041-7>.

- [16] L. N. Trefethen. *Spectral methods in MATLAB*. Software, environments, tools. Society for Industrial and Applied Mathematics, Philadelphia, PA, 2000. ISBN 0898714656.
- [17] E. Kreyszig. *Introductory functional analysis with applications*. Wiley, New York, 1978. ISBN 978-0-471-50731-4.
- [18] X. Llobet, K. Appert, and A. Bondeson, et al. On spectral pollution. *Computer Physics Communications*, 59(2):199–216, June 1990. ISSN 00104655. doi: 10.1016/0010-4655(90)90170-6. URL <https://linkinghub.elsevier.com/retrieve/pii/0010465590901706>.

Appendix A

Analytical Solutions

The polynomial eigenvalue problem with constant velocity profile is given by

$$\omega^2 \tilde{v} + 2i\omega v_0 \frac{\partial \tilde{v}}{\partial z} + (1 - v_0^2) \frac{\partial^2 \tilde{v}}{\partial z^2} = 0. \quad (\text{A.1})$$

This is a second-order differential equation with constant coefficients. To solve this equation, the first step is to get the roots of the following algebraic equation,

$$\omega^2 + 2i\omega v_0 r + (1 - v_0^2) r^2 = 0. \quad (\text{A.2})$$

The roots are complex and they are

$$r_1 = \frac{i\omega}{1 + v_0}, \quad r_2 = -\frac{i\omega}{1 - v_0}. \quad (\text{A.3})$$

Therefore, the general solution to Eq. (A.1) is given by

$$\tilde{v}(z) = A \exp\left(\frac{i\omega(z+1)}{1 + v_0}\right) + B \exp\left(-\frac{i\omega(z+1)}{1 - v_0}\right). \quad (\text{A.4})$$

To simplify the subsequent calculation, the constants A and B are adjusted so that $z + 1$ appears in the exponential. Depending on the boundary conditions, Dirichlet $\tilde{v}(\pm 1) = 0$ or fixed-open $\tilde{v}(-1) = \partial_z \tilde{v}(1) = 0$, the eigenvalues ω will be different.

Dirichlet Boundary

With Dirichlet boundary, $\tilde{v}(\pm 1) = 0$, we obtain the following system of equations,

$$\begin{aligned} 0 &= A + B \\ 0 &= A \exp\left(\frac{2i\omega}{1 + v_0}\right) + B \exp\left(-\frac{2i\omega}{1 - v_0}\right) \end{aligned}$$

From the first equation we get $B = -A$, substitute it into the second equation we have

$$\exp\left(\frac{4i\omega}{1 - v_0^2}\right) - 1 = 0. \quad (\text{A.5})$$

We see that to make this equality holds, the eigenvalues must be

$$\omega_n = n\pi(1 - v_0^2). \quad (\text{A.6})$$

Fixed-Open Boundary

With fixed-open boundary, $\tilde{v}(-1) = \partial_z \tilde{v} = 0$, we obtain the following system of equations,

$$\begin{aligned} 0 &= A + B \\ 0 &= A \exp\left(\frac{2i\omega}{1 + v_0}\right) \frac{i\omega}{1 + v_0} - B \exp\left(-\frac{2i\omega}{1 - v_0}\right) \frac{i\omega}{1 - v_0} \end{aligned}$$

Again, we get $B = -A$ from the first equation, put it into the second equation we obtain

$$\exp\left(\frac{-4i\omega}{1 - v_0^2}\right) + \frac{v_0 - 1}{v_0 + 1} = 0. \quad (\text{A.7})$$

Take the logarithm, we are able to get eigenvalues,

$$\omega_n = (v_0^2 - 1) \left[\frac{n\pi}{2} - \frac{1}{4} i \ln \left| \frac{v_0 - 1}{v_0 + 1} \right| \right] \quad (\text{A.8})$$