

# Road Segment Prioritization for Bicycle Infrastructure

2021-01-19

## Abstract

Understanding the motivators and deterrents to cycling is essential for creating infrastructure that gets more people to adopt cycling as a mode of transport. The aim of this paper is to develop methods to support the prioritisation of cycling infrastructure and cycling network design, accounting for cyclist preferences and the growing emphasis on ‘filtered permeability’ and ‘Low Traffic Neighborhood’ interventions internationally. Distance decay, routing, and network analysis techniques are used to examine where future cycling demand is most likely to arise, how such demand could be accommodated within existing street networks, and how to ensure a fair distribution of investment. The city of Manchester is used as a case study, although the methods can be applied to any city, as demonstrated in a reproducible code and open access data accompanying the paper. We find that flexible routing profiles that are adjustable to local needs can avoid road segments that are stressful to cycle on, enabling the identification of networks that balance directness against the need for safe and stress-free routes. We assess two different policy interventions , ‘utilitarian’ and ‘egalitarian’ by analyzing the connectivity of the city through community detection. From a policy perspective, our findings indicate that the ‘egalitarian’ prioritisation model approach is the more adequate to support cost-effective strategic cycle network planning.

**Keywords:** cycling networks, low-traffic neighborhoods, routing, transport equity

## 1 Ideas and discussion

- Community Detection: Where in the document should this section be? It is now before Road Segment Prioritization, but I can merge them
- How to add tables properly (they are now added using latex code which only shows up when outputting to pdf)
- Footnotes are sometimes split between pages. How do I keep them on the same page?

## 2 Introduction

The 2015 Paris agreement (UN 2015) acknowledged that fundamental changes to societies and economies are necessary to mitigate climate change. Like other sectors, transport is under substantial pressure to decarbonise resulting in a number of technical innovations including electric vehicles. But new vehicle technologies can only go so far and do not tackle parallel problems such as congestion, road traffic casualties and physical inactivity (Brand et al. 2020).

In this context, interest and investment in active modes are growing. The benefits extend beyond congestion and the environment, as active travel can also help alleviate what is referred to as the pandemic of global inactivity; physical inactivity is on the rise and has become the 4th highest cause of death globally (Kohl 3rd et al. 2012). Various studies have documented the association between active transport and lower risk of disease, including cancer and cardiovascular disease (Celis-Morales et al. 2017; Jarrett et al. 2012; Patterson et al. 2020). In the wake of the Covid-19 pandemic, and the resulting reduced capacity of public transport, the UK government has pledged to invest billions of pounds to improve walking and cycling infrastructure across the country. While this unprecedented sum is an opportunity to reshape cities in a way that improves the well-being of citizens, it does come with a warning:

“Inadequate cycling infrastructure discourages cycling and wastes public money. Much cycling infrastructure in this country is inadequate. It reflects a belief, conscious or otherwise, that hardly anyone cycles, that cycling is unimportant and that cycles must take no meaningful space from more important road users, such as motor vehicles and pedestrians - (DfT 2020b)”

The funding on its own is therefore no guarantee of a change in commuting across the country; it must be used to design adequate cycling infrastructure that is based on motivators and deterrents to cycling.

## 2.1 Motivators and Deterrents to Cycling

A considerable amount of research has been done towards that end. Segregated cycling infrastructure<sup>1</sup> has been shown to increase cycling uptake (Aldred, Croft, and Goodman 2019; Goodman et al. 2014; Marqués et al. 2015), with the separation from motorized vehicles being key (Winters et al. 2011). Revealed preference of cyclists shows that they are willing to deviate from the most efficient routes in order to commute on safer roads (Crane et al. 2017). However, such deviations are only considered if they do not considerably increase route circuitry; behaviour studies have found that the probability of choosing a route decreases in proportion to its length relative to the shortest route (Broach, Gliebe, and Dill 2011; Winters et al. 2010). Another defining feature for cycling infrastructure is how well connected it is. Cyclists prefer cohesive infrastructure, particularly when cycling on arterial roads with high levels of motorized traffic (Stinson and Bhat 2003). The lack of well-connected cycling infrastructure is one of the main obstacles to increasing cycling uptake (Caulfield, Brick, and McCarthy 2012). While direct and cohesive cycling networks have been shown to positively impact cycling rates, density<sup>2</sup> of the cycling network is also vital (Schoner and Levinson 2014).

## 2.2 Network-Level Approaches

The studies outlined above lay out the fundamentals for designing cycling networks that generate significant cycling uptake, but they do not propose network-level interventions. In this section we outline techniques used in past studies, namely optimization and network analysis techniques, such as connected components and community detection, and examine how they are leveraged to suggest cycling network designs. We compare the effectiveness of these network-level studies in incorporating the fundamentals outlined above. The methodology of this research is inspired by these techniques, but it attempts to add to them by ensuring that all of the outlined fundamentals are accounted for. It also goes further by attempting to factor in ethical considerations relating to distribution of investment.

*Optimization* techniques have been used to propose improvements to cycling networks. Mesbah, Thompson, and Moridpour (2012) propose a bi-level formulation to optimize allocation of cycling lanes to the network without exceeding a set budget. They account for the effect of cycling lanes on car traffic, and attempt to maximize utilization of said lanes with minimal impact on car travel times. Car usage is not considered by Mauttone et al. (2017), who develop an optimization framework that aims to minimize the total user cost of cycling on the network. The aggregate flow on links<sup>3</sup> is obtained by using shortest paths to route existing cycling demand onto the road network, and the solution is a proposed set of links where cycling infrastructure should be added in order to minimize the overall travel cost of cyclists across the network. The cost of traversing a link is given as a function of its length and whether or not it has cycling infrastructure. The problem has also been solved by attempting to find the minimum cost of improving roadway links to meet a desired level of service (LOS) (Duthie and Unnikrishnan 2014). In this formulation, all origin-destination (OD)<sup>4</sup> pairs need to be connected by roads that meet the desired LOS. A limitation of these problem formulations do not explicitly solve for continuity, which is dealt with using either a constraint specifying that each link with a bike lane should be connected to at least one destination (Mesbah, Thompson, and Moridpour 2012), a constraint on maximum deviation from shortest paths (Duthie and Unnikrishnan 2014), or a discontinuity penalty to prioritize connected road segments (Mauttone et al. 2017).

In this paper, continuity is analysed by looking at the connectivity of the network through the graph-theoretic concept of *connected components*. Other academics have taken this approach; Natera et al. (2019) study the existing cycling network in terms of its disconnected components and introduce two different algorithms to connect these components by their most critical links and, in doing so, measure the size of the growth of the largest connected component as a function of the kilometers of network added. The concept of connected components is also at the core of the methodology proposed by Olmos et al. (2020). After routing the cycling demand onto the network links, they use percolation theory to filter out the links based on the aggregate flow<sup>5</sup> passing through them, varying the

<sup>1</sup>Segregated cycling infrastructure refers to road space that is allocated to cyclists only, with physical separation to protect cyclists from other modes of transport.

<sup>2</sup>making an area's bicycle network denser means adding more cycling routes in the area and thereby giving cyclists more route options

<sup>3</sup>link refers to a road segment throughout this research

<sup>4</sup>Origin-Destination (OD) data is normally obtained from a census. In this paper we use open access data from the UK census (ONS 2011), which contains aggregate statistics on number of commuters between Middle layer Super Output Area (MSOA) zones, by mode of travel. MSOAs have an average population of just over 8000 (ONS 2018).

<sup>5</sup>flow is used throughout this research to refer to the cycling demand when it is routed onto the road network. The flow on any road

flow threshold for filtering to identify the minimum flow at which the whole city is connected by a giant component. While these approaches deal with continuity better, they look at the network as a whole when attempting to improve it, and in doing so fail to account for equitable distribution of infrastructure.

### 2.3 Ethical Underpinnings and Proposed Approach

All of these network-level methodologies are underpinned by ethical principles, even though these principles are not explicitly acknowledged by the authors. This is important since different ethical principles constitute different problem formulations and targets. Broadly speaking, transport appraisal can be based on either utilitarian or egalitarian principles. The former seeks to maximize the overall benefit, while the latter is concerned with a fair distribution of benefits (Jafino, Kwakkel, and Verbraeck 2020). Nahmias-Biran, Martens, and Shiftan (2017) criticize the utilitarian approach that has been historically popular in the evaluation of transport investments, explaining how the maximization of overall benefit fails to account for the distribution of that benefit among communities or individuals. Lucas, Van Wee, and Maat (2016) explain how transport studies have traditionally looked at the bigger picture without studying the distribution of investments on the different parts of the study area, and go on to propose an egalitarian approach that ensures the disaggregation of transport policy benefits across the study area. Pereira, Schwanen, and Banister (2017) also emphasize the need for a more egalitarian approach to transport planning. They highlight accessibility as a cornerstone of distributive justice, and contend that policies should aim to distribute investments in a way that minimizes spatial variations in accessibility.

This research attempts to propose an egalitarian framework for cycling network design. This is done by identifying the different sub-networks that exist within the larger network, and ensuring they all get a fair share of investment. Trip patterns in a city are not uniformly distributed geographically, and *community finding* methods have been used to partition study areas into localized areas that experience a disproportionate number of trips within them. Akbarzadeh, Mohri, and Yazdian (2018) use a modularity maximization approach (Blondel et al. 2008) on taxi trip data to identify 7 different communities in the city of Isfahan, Iran. An optimization problem is then formulated to connect nodes within each community with cycling infrastructure, with the emphasis being on connectivity within the communities, not between them. Bao et al. (2017) adopt a similar methodology, first identifying communities and then using a greedy network expansion algorithm to simultaneously add links to each community. The link with the highest benefit-cost ratio in each community is selected, and the network is grown by adding neighboring links to the solution until a budget limit is met. The benefit is the flow on the link, and each link is assigned a cost based on current road conditions.

Our work builds on these *community finding* approaches by proposing a similar greedy network expansion algorithm for cycle network expansion within communities. We incorporate community finding methods for study area partitioning with weighted routing to avoid links that are stressful to cycle on. In doing so, we propose a methodology that accounts for motivators and deterrents to cycling. We propose three sub-methodologies that expand on some of the limitations of previous studies. These limitations include (a) bias inherent when basing network design solely on existing cycling demand, (b) proposing routes that may not correspond to studies on cyclist preference and government policies, and (3) insufficient consideration of the ethical principles underlying the analysis. Section 3 focuses on calculating potential cycling demand. Section 4 focuses on routing the demand onto the road network while accounting for cyclist preferences and government priorities. Section 5 outlines a methodology for partitioning the study area based on a community finding algorithm and routed cycling demand. Section 6 introduces the network expansion algorithms, and compares an approach grounded in ‘egalitarianism’ to one grounded in ‘utilitarianism’.

## 3 Calculating Potential Cycling Demand

Relying only on existing cycling activity to prioritise cycling infrastructure can reinforce existing cycling patterns and ignores potential cycling demand that could be satisfied by a connected network. To avoid this issue, Duthie and Unnikrishnan (2014) choose to ignore existing demand completely, and focus on creating a network that connects the entire study area. Olmos et al. (2020) obtain the distance distribution of cyclists using a smartphone-based bicycle GPS data, and then use a rejection-sampling algorithm on the OD data of the study area to match the potential demand distribution to the distribution obtained from GPS data.

For our purposes, we use a logistic regression model to calculate potential cycling demand. The model was adapted from the Propensity to Cycle Tool (PCT), which estimates the proportion of trips ( $C_p$ ) for each OD pair that would

---

segment is the cumulative demand on it, resulting from cyclists commuting between various OD pairs

cycle under different scenarios of change (we used the Government Target scenario, representing a nationwide target of doubling cycling by 2025) as a function of distance and hilliness (Lovelace et al. 2017). The logistic regression model used to calculate  $C_p$  has the following parameters:

$$\begin{aligned} \text{logit}(C_p) = & -4.018 - 0.6369d + 1.988\sqrt{d} + 0.008775d^2 \\ & - 0.2555s + 0.00206ds - 0.1234\sqrt{ds} \end{aligned} \quad (1)$$

where  $d$  and  $s$  are the distance and slope respectively for the OD pair. The authors use square and square-root distance terms “to capture the non-linear impact of distance on the likelihood of cycling”, and interaction terms to capture the combined effect of slope and distance (Lovelace et al. 2017).

The potential demand calculations show that the current and potential number of cyclists both follow a bell-shaped distribution, with the number of trips peaking around the 3-4km commuting distance and then going back down for longer distances (see Figure 1).

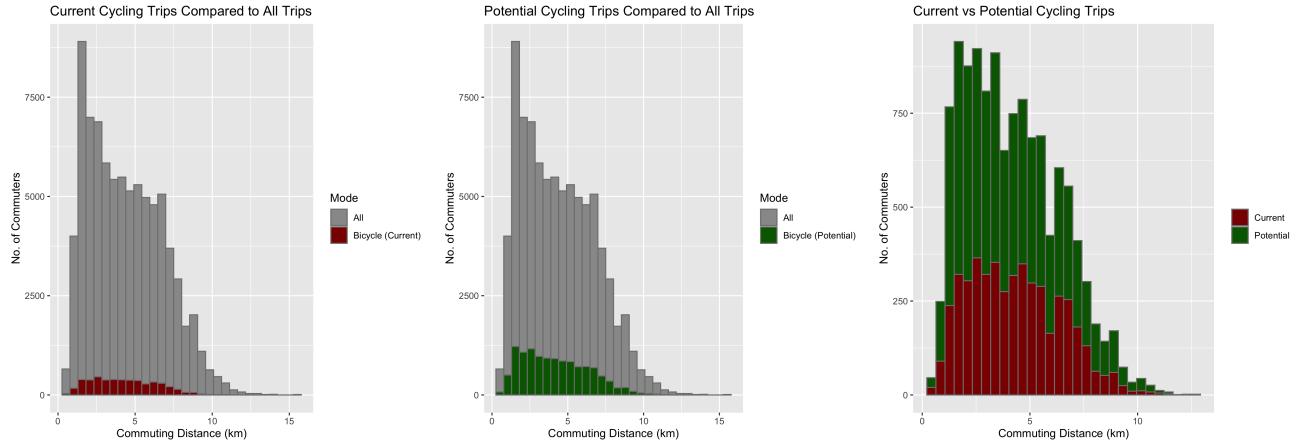


Figure 1: Distribution of Potential Cycling Demand

It should be noted that the calculations assume cycling in the traditional sense, i.e. the topography affects the decision to cycle. Recently there have been various micro-mobility solutions, including e-bikes, that allow commuters to traverse longer distances and hillier roads with less effort than traditional bicycles. While these modes would probably be associated with less geographical impedance, it is beyond the scope of this work to integrate those modes into the analysis. This is partially restricted by the lack of data on the proliferation of these modes, raising the point that perhaps the census data category of ‘Bicycle’ is too vague, and should be further disaggregated to distinguish between traditional bicycles and other forms of micro-mobility.

## 4 Routing

A limitation of the PCT approach outlined in the previous section is that it is reliant on external and therefore inflexible routing services. The next step in our approach is to route the potential cycling demand ( $C_p$ ) between all OD pairs onto the road network. We choose not to use the PCT approach for routing as it is reliant on external and therefore inflexible routing services.

Table 1: OSM Road Types

OSM Road Type	Description	UK Equivalent
Motorway	Road open to high-speed vehicles only	Motorway
Trunk	Roads that don't meet motorway criteria,	A-Roads with Primary Status
Primary	in descending order of importance and through-traffic	A-Roads with Non-Primary Status
Secondary		B-roads

Tertiary		Classified unnumbered roads OR unclassified busy through roads
Unclassified		Unclassified (Intended for local traffic - 60% of UK roads)
Residential	Function is purely residential	
Service	Road that provides access to a facility	
Track	Unpaved - suitable for two track vehicles (mostly rural)	
Cycleway	Designated cycleway - open to cyclists only	
Path	Unpaved - open to non-motorized traffic only	

To conduct routing, the following is considered:

- Cyclist Preference:** Work done by Dill and McNeil (2013) on examining cyclist typologies determined that around 60% of Portland residents fit under the *interested but concerned* category. These were people that enjoyed cycling but avoided it due safety concerns. The key to encouraging this group was to create a low-stress cycling network, not only through segregated infrastructure but also by planning routes that passed through residential streets.
- Low-Traffic Neighborhoods:** The UK Department for Transport is allocating funding to local authorities to invest in Active Transport, partially through the creation of LTNs (DfT 2020b). This includes closing off residential streets to motorized traffic.
- Existing Cycling Infrastructure:** Utilizing existing cycling infrastructure makes economic sense, as small investments may lead to large connectivity gains as the disconnected cycling infrastructure gets joined together.

The above points are accounted for by using a weighted road network for routing. This has previously been done by multiplying all road segments without cycling infrastructure by an impedance factor (Mauttome et al. 2017), or by assigning different weights to the road segments proportional to the investment cost of bringing them to an acceptable level of stress for cycling (Duthie and Unnikrishnan 2014). Our approach is similar to the latter, as we create a weighting profile that is adjusted to favor less stressful streets (based on information from Table 1), and roads with existing cycling infrastructure. We believe this to be more practical than the approach adopted by Mauttome et al. (2017), as it goes beyond simply favoring roads with existing cycling infrastructure to creating a hierarchy of road preference based on perceived stress levels. The approach is also in line with the creation of LTNs, as residential streets are those where motorized traffic is most likely to be banned in the creation of LTNs.

Table 2: Weighting Profiles

OSM Road Type	Weighting Profile		
	Unweighted	Weighted	Weighted_2
Cycleway	1	1	1
Path	1	0.9	0.9
Residential	1	0.9	0.9
Service	1	0.9	0.9
Tertiary	1	0.9	0.9
Track	1	0.9	0.9
Unclassified	1	0.9	0.9
Secondary	1	0.8	0.8
Primary	1	0.7	0
Trunk	1	0.6	0
Motorway	1	0	0

A weighted distance  $d_w$  for each road segment is calculated as follows:<sup>6</sup>

<sup>6</sup>The **dodgr** r package (Padgham 2019) is used to route cycling demand onto the road network. The package uses the OpenStreetMaps (OSM) road network and allows the user to assign weights to roads based on their type. The routing is done based on weighted shortest paths, with the distance along each road segment being divided by a factor to obtain the weighted distance for routing. It is more intuitive to multiply when weighting a network, but the **dodgr** package divides by numbers between 0 and 1, which achieves the same

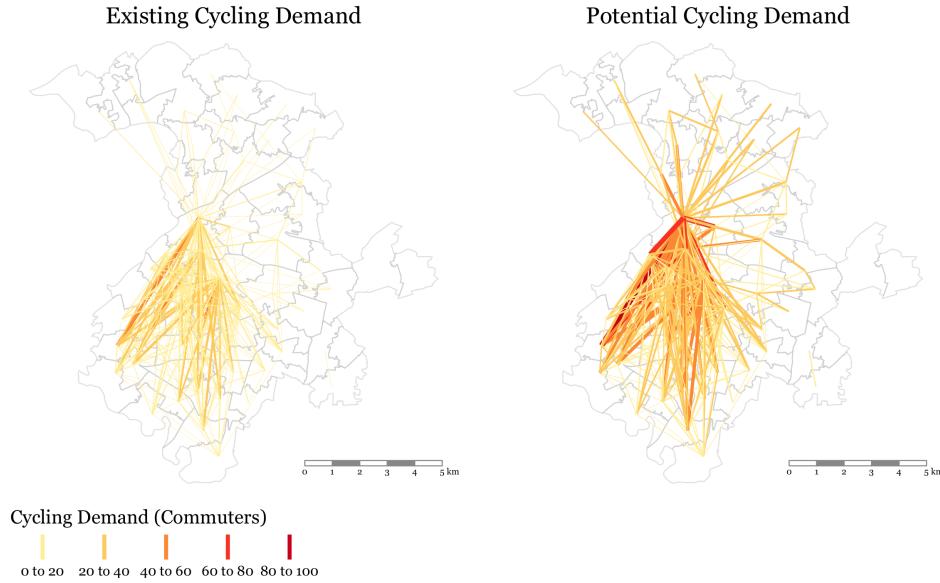


Figure 2: Current and Potential Cycling Demand

$$d_w = d_{unw} / W \quad (2)$$

where  $d_{unw}$  is the unweighted distance and  $W$  is the weight from Table 2.

All weights are between 0 and 1, and the values in the *Weighted* profile are chosen to be inversely proportional to the stress level experienced by cyclists on them. The *Unweighted* weighting profile is used to compare increases in route length resulting from two different approaches:

1. **Weighted:** Relatively high impedance on Primary and Trunk roads (to minimize cycling on them).
2. **Weighted\_2:** Avoiding Primary and Trunk Roads completely.

Comparing the cycling demand routed on the weighted and unweighted road network allows us to get a better understanding of the importance of different road types. In the case of Manchester, trunk roads bisect the city and are a major part of unweighted shortest paths (Figure 3). On the other hand, cycleways are not part of unweighted shortest paths, and so very little of the cycling demand is routed through them. In the weighted network, cycleways are much better utilized, and the majority of the cycling demand passes through tertiary roads, as expected.

The results of routing potential cycling demand on the weighted and unweighted networks are understandably quite different. From Figure 3 we can see that trunk and primary roads are the most efficient means of traversing the road network of Manchester. Both of these road types are classified as Primary A roads according to the UK Department for Transport's road classification (Table 1), and are therefore part of the Primary Route Network (PRN) (DfT 2012). The PRN has the widest, most direct roads on the network, and carries most of the through traffic. This includes freight, with all roads in the PRN being required by law to provide unrestricted access to trucks up to 40 tonnes (DfT 2012).

We choose to avoid routing the potential cycling demand on Primary A Roads for the following 2 reasons:

1. **Logistical Difficulty:** Changes on these roads need to be agreed upon by all affected authorities (DfT 2012), which may prove to be difficult.

---

result. For the sake of reproducibility, we stick to the convention used in the package.

Flow on Unweighted Network

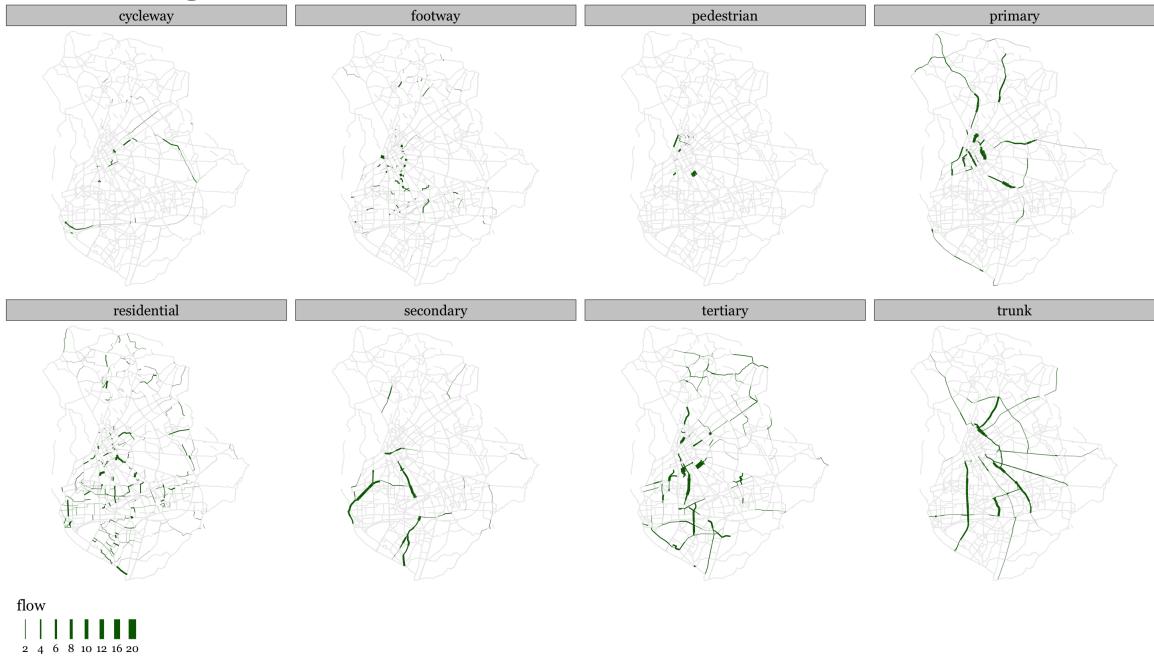


Figure 3: Flow Results Based on Unweighted Shortest Paths (Manchester)

Flow on Weighted Network

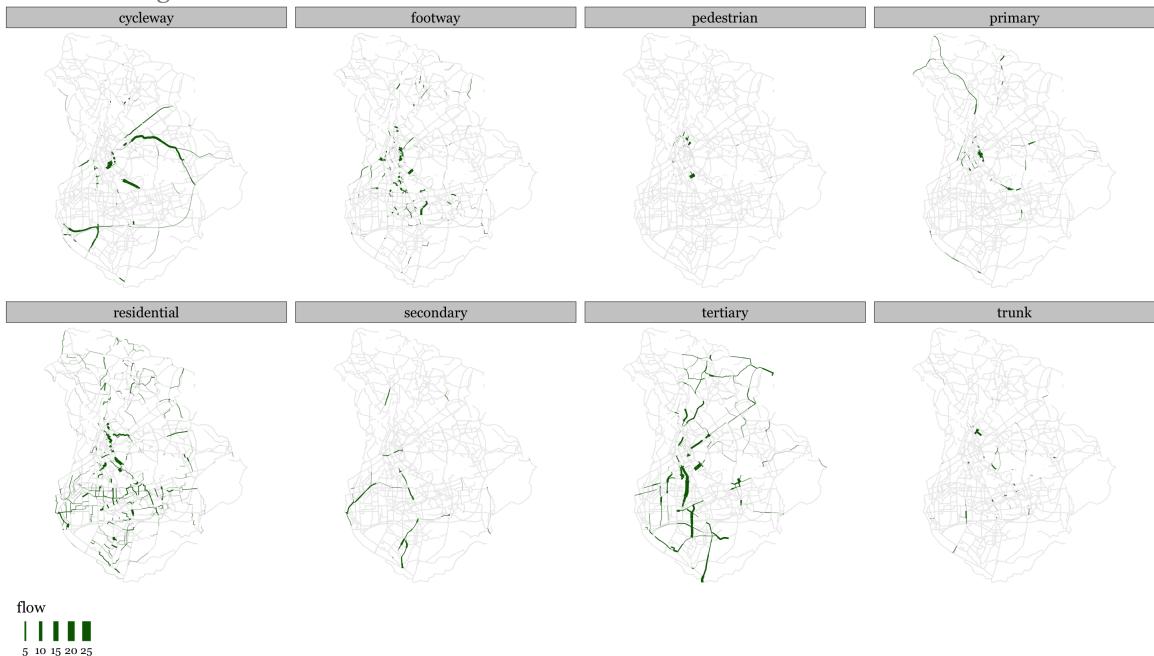


Figure 4: Flow Results Based on Weighted Shortest Paths (Manchester)

2. **Low Traffic Neighborhoods (LTNs):** The UK government is aiming to restrict access to motorized vehicles on residential roads to create LTNs (DfT 2020b). This is part of a policy to prevent automobile rat-running and make streets more accessible to cyclists and pedestrians. Under such a policy, Primary A roads would become even more essential for motorized traffic and it would be more difficult to reallocate road space on these roads to cyclists.

Figure 4 shows that routing on the weighted network significantly reduces flow on the trunk and primary roads, but does not eliminate it completely. This is intentional, as the impedance on these roads is only slightly higher than remaining road types (See Table 2). Potential cycling demand is only routed on these roads if there are no routes through other roads that offer comparable directness.

Banning cycling flow completely on trunk and primary roads may result in excessively circuitous paths, as seen in Figure 5. When routing using the *weighted* weighting profile in Table 2, we see that shortest paths increase by less than 5% on average from unweighted shortest paths, with the largest increases still below 30%. When routing on primary and trunk roads is banned (*weighted\_2* profile in Table 2), the average increase relative to unweighted shortest paths rises to 10%, with certain locations experiencing more significant negative effects on accessibility.

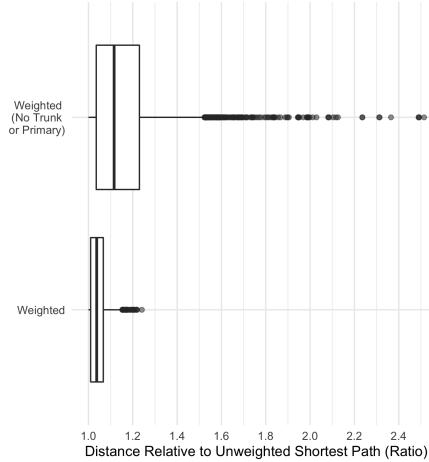


Figure 5: Effect of Banning Cyclists from Trunk and Primary Roads for all OD Pairs (Manchester)

Given that cyclists will only deviate from shortest paths by a certain amount to access better cycling infrastructure (as explained in Section 2), allowing flow on some stretches of trunk and primary roads is necessary to insure cycling uptake and equitable access to cycling infrastructure. In its new vision for walking and cycling, the Department for Transport acknowledges that minimal segregated stretches of bicycle lanes on main roads will be necessary to avoid circuitous cycling networks (DfT 2020b).

Weighting the road network also allows us to better utilize existing cycling infrastructure, as can be seen by the higher flow on cycleways in Figure 4. Again, the small differences in impedance between cycleways and other road types mean that cycleways that require significant deviation are not routed on.

It should be reiterated that the weighting profile used for routing has been developed for the purposes of this study. It creates a hierarchy of road preference that is grounded in cyclist preferences and government plans to create LTNs. Sensitivity analysis should be done to determine an optimal weighting profile, but given the variation in city road networks, these would probably require calibration to the specific city. More accurate routing could be carried out given the availability of road-level data. In such cases we would add additional impedance to specific roads, giving more useful routing results than the current methodology which considers all roads of the same type to be equivalent.

One use-case of such granular data would be to identify roads that serve schools. The Department of Transport notes that the number of school children being driven to school has trebled over the past 40 years (DfT 2020b), and so having cycling infrastructure serving schools is key to achieving the government target of getting more children to cycle. This would not be difficult, as over 75% of children in the UK live within a 15 minute cycle from their school (DfT 2020a). Goodman et al. (2019) show that if dutch levels of cycling were achieved in the UK, the % of children cycling to school could increase from 1.8% to 41%. In their typology of cyclists, Dill and McNeil (2013) found that a majority of people who say they would never cycle had never cycled to school, whereas confident

cyclists were those most likely to have cycled to school. Getting people to cycle from a young age is therefore key to achieving societal change in commuting habits.

## 5 Community Detection

A major challenge facing ‘top-down’ planning approaches is how to incorporate egalitarian principles by fairly distributing investments in cycling infrastructure. One way of quantifying this is to split up the city into smaller geospatial areas and target equal investment in each of those areas, which could also help ensure that on-the-ground surveys are made by local stakeholders, an important component of the planning process (Parkin 2018). Community detection offers us a way to delineate such a split; cyclists are limited in their commuting distance (see Figure 6), and so trip attractors are more likely to have a local catchment area of cyclists.

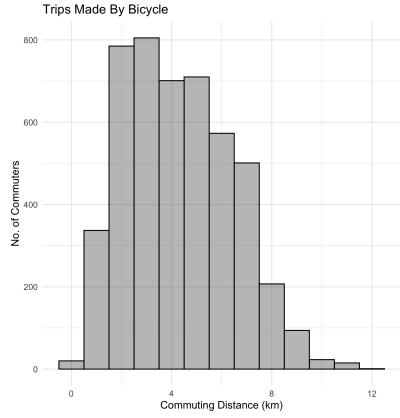


Figure 6: Cycling Commuting Distance - Manchester (2011 Census Data)

In our case, the network is the city; the nodes are the population-weighted MSOA centroids and the links connecting each MSOA pair are weighted by the potential cycling demand between them. The Louvain method (Blondel et al. 2008) is used to separate MSOAs into communities. Potential cycling demand is used since we assume that this is what the cycling demand will be once the cycling infrastructure is added. To assign road links to communities, the following steps are carried out:

1. Create links between MSOA centroids and weigh these links by potential cycling demand between them.
2. Use the Louvain method to determine the optimal number of communities and assign each MSOA centroid to a community.
3. Assign each road link to the same community as the closest MSOA centroid to it.

The results show that Manchester can be split into four large communities and one small one (Figure 7).

## 6 Road Segment Prioritization

After routing the potential cycling demand onto the road network using weighted shortest paths, we have estimates for the cumulative potential cycling demand passing through all road segments. This cumulative demand (referred to as *flow*) is then used as a basis for identifying segments that are in most need of investment in segregated cycling infrastructure. In doing so, we must account for the motivations and deterrents for cycling identified in Section 2, namely direct and well-connected routes.

A range of algorithms could be used for prioritisation. Because policy priorities vary, we present two algorithms. Both utilize existing infrastructure from the beginning and allow us to compare a solution that focuses on utilitarianism to one that focuses on egalitarianism. In both algorithms, links are selected iteratively and the iteration at which each link is added to the solution is recorded. Investments in cycling infrastructure can be limited by budget constraints, so it can be useful to see where best to allocate a defined length of segregated infrastructure.

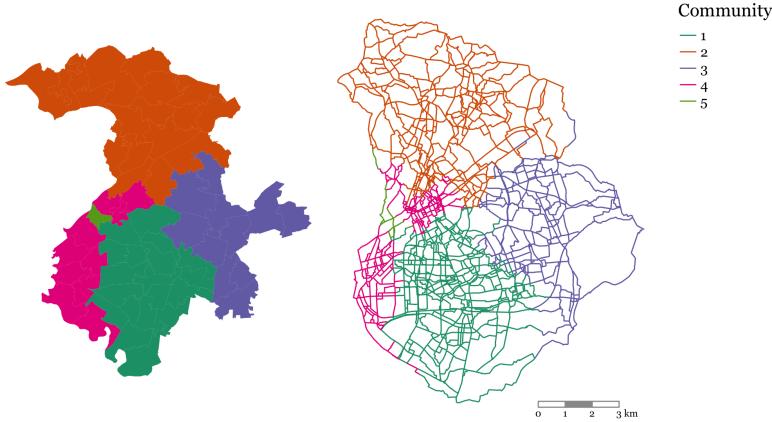


Figure 7: Communities Based on Potential Cycling Demand (Manchester)

### 6.1 Algorithm 1: Utilitarian Expansion

1. Identify all links that have segregated cycling infrastructure and add them to the initial solution
2. Identify all links that neighbor links **in** the current solution
3. Select neighboring link with highest flow and add it to the solution
4. Repeat steps **2** and **3** until all flow is satisfied or investment threshold is met

This algorithm ensures that the resulting network is connected. It also satisfies the directness criteria, since links on the weighted shortest paths are those that have the highest flow passing through them (this is a result of the routing in Section 2).

### 6.2 Algorithm 2: Egalitarian Expansion (Focus on Fair Distribution of Resources)

The first algorithm focuses on connectivity and directness, but not on fairly distributing investment. The latter is not a requirement for increasing cycling uptake, but it is fundamental for spatial equity, as explained in Section 2. This algorithm incorporates the ideal of fair distribution by using community detection to partition the road network.

The algorithm uses the following logic to ensure fair distribution between communities:

1. Identify all links that have segregated cycling infrastructure and add them to the initial solution
2. Identify all links that neighbor links **in** the current solution
3. Select from each community one neighboring link with highest flow and add it to the solution
4. If there are no more neighboring links **in** a community, select the link with the highest flow **in** that community, regardless of connectivity, and add it to the solution
5. Repeat steps **2**, **3** and **4** until all flow is satisfied or investment threshold is met

Even though we may end up with a more disconnected network, we will have separate connected networks in each community. Given that communities are defined by having more internal flow than external flow, this is a satisfactory solution.

The results of the community detection are used to evaluate the algorithms. This is done by looking at the *person-km satisfied* as cycling infrastructure is added. Person-km is a measure of the total km cycled on a road segment, so it is the product of the number of potential commuters cycling on that road segment (*flow*) and the length of the segment in km (*l*). For each road segment, the person-km is equal to  $flow * l$ . In the case of Manchester, Table 3 shows that almost half of the person-km is in community 1, while only 0.5% of total person-km on the network is in community 5.

Table 3: Total Person-Km in Different Communities (Manchester)

Community	Person-Km (Total)	Person-Km (%)
1	284,458	44.4
2	163,877	25.6
3	79,218	12.4
4	109,635	17.1
5	3,317	0.5

Looking at the person-km satisfied (Figure 8), we see that the incremental addition of cycling infrastructure is better distributed between communities using Algorithm 2; equal distribution of investment results in the gain in % of person km satisfied in each community being inversely correlated with the size of the community. In addition, we find that the restrictions imposed by Algorithm 2 on the network expansion do not seem to have a noticeable effect on the city-wide % of person-km satisfied. Comparing both algorithms, we can see that Algorithm 1 provides only marginally quicker city-wide gains than Algorithm 2.

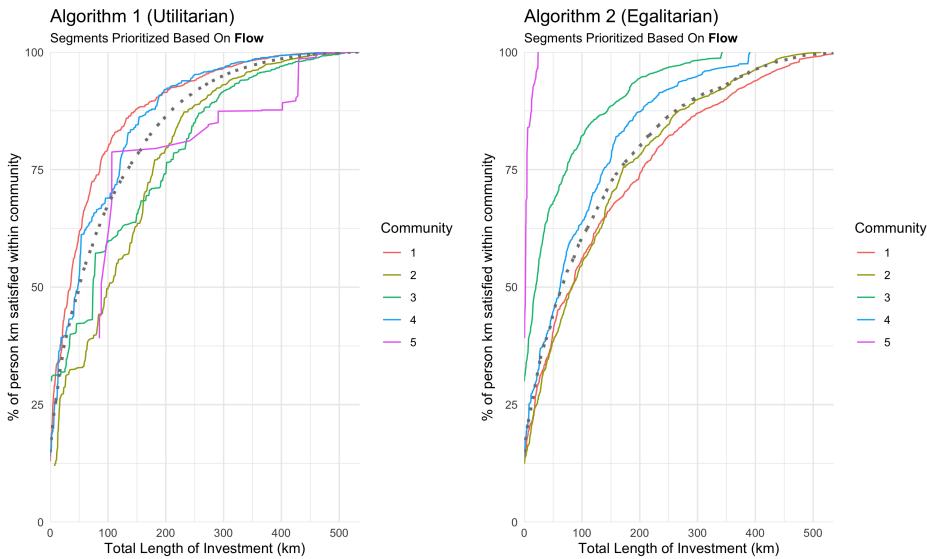


Figure 8: Comparing Overall (Dashed) and Community Level Person-Km Satisfied (Manchester)

Figure 9 gives us a geographic representation of the results from Algorithm 2; it shows when each link was added to the solution (first 100km, second 100km, etc). We can see that, generally, road segments around cycling infrastructure are prioritized, except for those neighboring cycling infrastructure on the very periphery. The first 100km is also spatially distributed across the city, with no apparent bias towards a particular area.

It is also important to understand how the different highway types contribute to the proposed network. Figure 9 shows that most of the flow will be on residential and tertiary roads, as expected from the weighting profile defined in Table 2.

### 6.3 Connectivity

Existing cycling infrastructure is made up of many disconnected components. Both Algorithm 1 and 2 start with all existing segregated cycling infrastructure and aim to create an efficient, connected network. Figure 10 shows that both algorithms gradually reduce the number of components as more infrastructure is added, but Algorithm 2 is able to provide better connectivity with less investment.

Consistent growth can also be seen for the size of the Largest Connected Component in the proposed bicycle network (Figure 10). Here however, we find that there is little difference between both Algorithms.

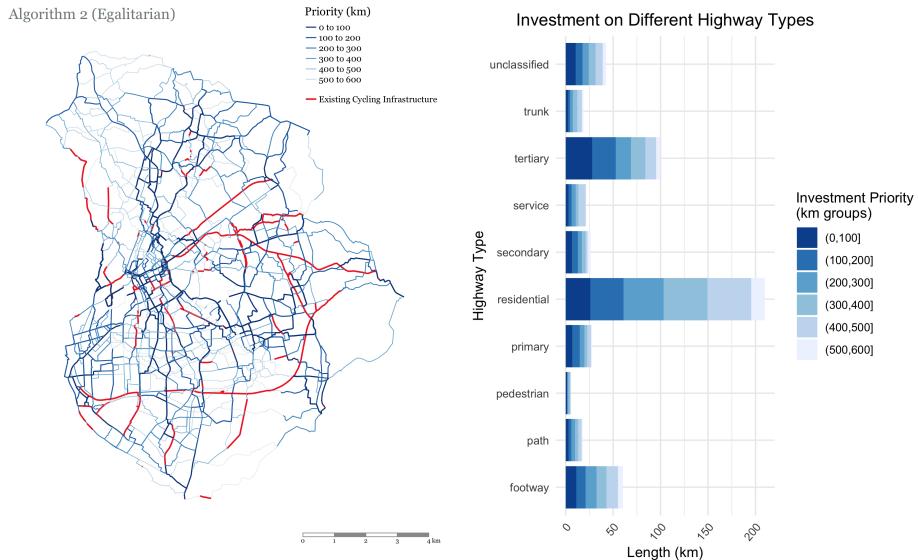


Figure 9: Results of Alg. 2 (Manchester)

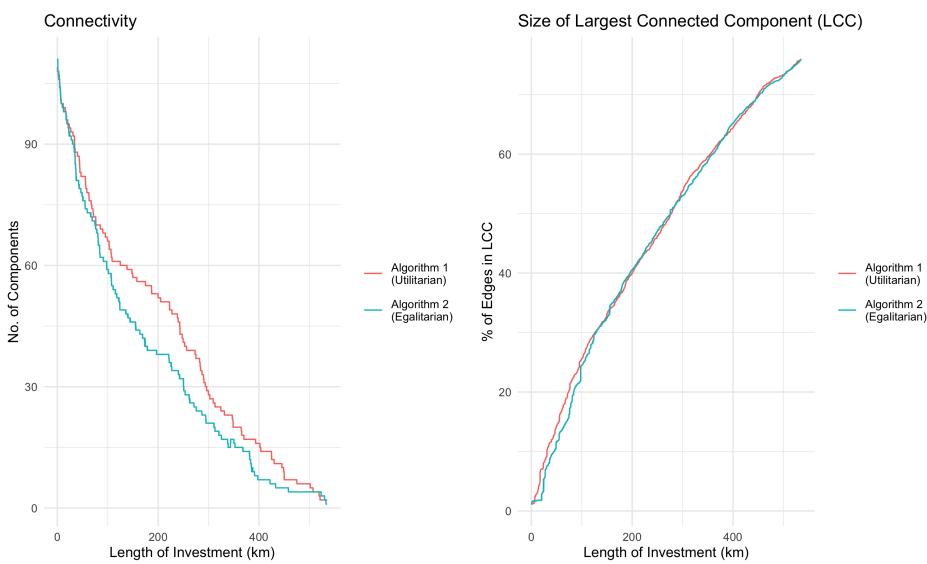


Figure 10: Network Characteristics

## 7 Overarching Policies

While segregated, connected, and direct cycling infrastructure is key to achieving high levels of cycling, research has shown that it cannot exist in a vacuum. Wardman, Tight, and Page (2007) developed a mode choice model for the UK and their results showed that improved cycling infrastructure on its own only had modest impacts on mode shift, and even the unlikely scenario of all urban routes being serviced by segregated bike lanes was forecast to increase cycling mode share by only 3%. International research shows that cities that invest in more comprehensive cycling projects have a more significant increase in the number of cyclists as well as the cycling mode share (Parkin 2018; Pucher, Dill, and Handy 2010). These cities do not just focus on infrastructure, but on general policies as well as restricting car use. Evaluation of policies in Denmark and Germany and the Netherlands has shown that their high cycling mode share is down to a broader set of policies that also include traffic calming, filtered permeability interventions, cycling rights of way, bike parking, integration with the public transport network, and making driving cars both expensive and inconvenient (Pucher and Buehler 2008). While these policies are outside the scope of this research, it is important to recognize their key role in bringing about an increase in levels of cycling.

## 8 Discussion and conclusions

This paper provides a methodology for prioritizing road segments for investments in cycling infrastructure, with the output being a proposed cycling network for the city under study. The approach aims to respect both the needs of the users and the ambitions of stakeholders working at local/regional levels. The results, primarily detailed route network maps based on current travel behaviour derived from OD data, can provide an evidence-based starting point for introducing a direct, connected, and low-stress network for any city by leveraging available open data. Given that the “most essential activity entailed in the design of cycle-friendly infrastructure is developing a cycle network” (Parkin 2018), we believe that the methods have great potential to inform investment in cities such as Manchester where there is political will to invest in cycling long-term. A benefit of the approach is that it has relatively modest data requirements: only the road network (from OSM), its topography (from satellite imagery), and origin-destination data (from the national census in this case) are needed, opening up the possibility of deploying the approach in other cities<sup>7</sup>.

The approach is not without limitations. The level of detail is only as good as the granularity of the available data (in this case relatively coarse zones). Iacono, Krizek, and El-Geneidy (2010) note that such large travel zones are not ideal for understanding route choice behaviour of cyclists and pedestrians. They also give rise to an ‘ecological fallacy’ whereby average characteristics are assumed to apply to all residents of the aggregated geographical area, suggesting a need for applying the methods to more granular origin-destination data (and for governments and other data-collecting organisations to make origin-destination data more readily available).

A core part of the methodology is determining where there is a high potential for cycling, and using this as a basis for recommendations on road space reallocation in order to unlock potential cycling demand. The framework provides a routing engine to study the effects of limiting access on different road types, finding that reducing cyclist flow on roads with high through-traffic results in acceptable increases in commuting distances. As a result, a hierarchy of road preference needs to be defined to route potential cycling demand. The framework provides different algorithms to determine where investments in cycling infrastructure should be prioritized. These algorithms, based on connectivity and egalitarian principles of resource distribution, ensured that whatever the level of investment, the resulting cycling network would improve connectivity of existing cycling infrastructure.

The methods can support the ongoing shift towards active transport, which is one of the priority areas of investments worldwide in transport planning. This necessary shift predates the pandemic and is driven by ambitions to improve the health and well-being of the citizens worldwide. The success of such a shift depends on the appeal of the cycling network for prospective cyclists, together with policies and interventions deterring the usage of the private car.

## References

- Akbarzadeh, Meisam, Syed Sina Mohri, and Ehsan Yazdian. 2018. “Designing Bike Networks Using the Concept of Network Clusters.” *Applied Network Science* 3 (1): 12.

<sup>7</sup>The results are easily reproducible for all UK cities, and can also be reproduced for cities elsewhere given the availability of commuter data. For instructions on reproducing the results shown in this paper, see the **README** file in the R folder of the .zip file that accompanies this paper (to be released as open source software when the paper is published).

- Aldred, Rachel, Joseph Croft, and Anna Goodman. 2019. "Impacts of an Active Travel Intervention with a Cycling Focus in a Suburban Context: One-Year Findings from an Evaluation of London's in-Progress Mini-Hollands Programme." *Transportation Research Part A: Policy and Practice* 123: 147–69.
- Bao, Jie, Tianfu He, Sijie Ruan, Yanhua Li, and Yu Zheng. 2017. "Planning Bike Lanes Based on Sharing-Bikes' Trajectories." In *Proceedings of the 23rd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, 1377–86.
- Blondel, Vincent D, Jean-Loup Guillaume, Renaud Lambiotte, and Etienne Lefebvre. 2008. "Fast Unfolding of Communities in Large Networks." *Journal of Statistical Mechanics: Theory and Experiment* 2008 (10): P10008.
- Brand, Christian, Evi Dons, Esther Anaya-Boig, Ione Avila-Palencia, Anna Clark, Audrey de Nazelle, Mireia Gascon, Mailin Gaupp-Berghausen, Regine Gerike, and Thomas Gotschi. 2020. "The Climate Change Mitigation Effects of Active Travel." *Preprint: Researchsquare.com*.
- Broach, Joseph, John Gliebe, and Jennifer Dill. 2011. "Bicycle Route Choice Model Developed Using Revealed Preference GPS Data." In *90th Annual Meeting of the Transportation Research Board, Washington, DC*.
- Caulfield, Brian, Elaine Brick, and Orla Thérèse McCarthy. 2012. "Determining Bicycle Infrastructure Preferences—a Case Study of Dublin." *Transportation Research Part D: Transport and Environment* 17 (5): 413–17.
- Celis-Morales, Carlos A, Donald M Lyall, Paul Welsh, Jana Anderson, Lewis Steell, Yibing Guo, Reno Maldonado, et al. 2017. "Association Between Active Commuting and Incident Cardiovascular Disease, Cancer, and Mortality: Prospective Cohort Study." *Bmj* 357: j1456.
- Crane, Melanie, Chris Rissel, Chris Standen, Adrian Ellison, Richard Ellison, Li Ming Wen, and Stephen Greaves. 2017. "Longitudinal Evaluation of Travel and Health Outcomes in Relation to New Bicycle Infrastructure, Sydney, Australia." *Journal of Transport & Health* 6: 386–95.
- DfT. 2012. "Guidance on Road Classification and the Primary Route Network." Department of Transport of Britain.
- . 2020a. "Cycling Infrastructure Design."
- . 2020b. "Gear Change: A Bold Vision for Cycling and Walking."
- Dill, Jennifer, and Nathan McNeil. 2013. "Four Types of Cyclists? Examination of Typology for Better Understanding of Bicycling Behavior and Potential." *Transportation Research Record* 2387 (1): 129–38.
- Duthie, Jennifer, and Avinash Unnikrishnan. 2014. "Optimization Framework for Bicycle Network Design." *Journal of Transportation Engineering* 140 (7): 04014028.
- Goodman, Anna, Ilan Fridman Rojas, James Woodcock, Rachel Aldred, Nikolai Berkoff, Malcolm Morgan, Ali Abbas, and Robin Lovelace. 2019. "Scenarios of Cycling to School in England, and Associated Health and Carbon Impacts: Application of the 'Propensity to Cycle Tool'." *Journal of Transport & Health* 12: 263–78.
- Goodman, Anna, Shannon Sahlqvist, David Ogilvie, and iConnect Consortium. 2014. "New Walking and Cycling Routes and Increased Physical Activity: One-and 2-Year Findings from the UK iConnect Study." *American Journal of Public Health* 104 (9): e38–e46.
- Iacono, Michael, Kevin J Krizek, and Ahmed El-Geneidy. 2010. "Measuring Non-Motorized Accessibility: Issues, Alternatives, and Execution." *Journal of Transport Geography* 18 (1): 133–40.
- Jafino, Bramka Arga, Jan Kwakkel, and Alexander Verbraeck. 2020. "Transport Network Criticality Metrics: A Comparative Analysis and a Guideline for Selection." *Transport Reviews* 40 (2): 241–64.
- Jarrett, James, James Woodcock, Ulla K Griffiths, Zaid Chalabi, Phil Edwards, Ian Roberts, and Andy Haines. 2012. "Effect of Increasing Active Travel in Urban England and Wales on Costs to the National Health Service." *The Lancet* 379 (9832): 2198–2205.
- Kohl 3rd, Harold W, Cora Lynn Craig, Estelle Victoria Lambert, Shigeru Inoue, Jasem Ramadan Alkandari, Grit

- Leetongin, Sonja Kahlmeier, Lancet Physical Activity Series Working Group, and others. 2012. "The Pandemic of Physical Inactivity: Global Action for Public Health." *The Lancet* 380 (9838): 294–305.
- Lovelace, Robin, Anna Goodman, Rachel Aldred, Nikolai Berkoff, Ali Abbas, and James Woodcock. 2017. "The Propensity to Cycle Tool: An Open Source Online System for Sustainable Transport Planning." *Journal of Transport and Land Use* 10 (1): 505–28.
- Lucas, Karen, Bert Van Wee, and Kees Maat. 2016. "A Method to Evaluate Equitable Accessibility: Combining Ethical Theories and Accessibility-Based Approaches." *Transportation* 43 (3): 473–90.
- Marqués, R, V Hernández-Herrador, M Calvo-Salazar, and JA García-Cebrián. 2015. "How Infrastructure Can Promote Cycling in Cities: Lessons from Seville." *Research in Transportation Economics* 53: 31–44.
- Mauttome, Antonio, Gonzalo Mercadante, María Rabaza, and Fernanda Toledo. 2017. "Bicycle Network Design: Model and Solution Algorithm." *Transportation Research Procedia* 27: 969–76.
- Mesbah, Mahmoud, Russell Thompson, and Sara Moridpour. 2012. "Bilevel Optimization Approach to Design of Network of Bike Lanes." *Transportation Research Record* 2284 (1): 21–28.
- Nahmias-Biran, Bat-hen, Karel Martens, and Yoram Shiftan. 2017. "Integrating Equity in Transportation Project Assessment: A Philosophical Exploration and Its Practical Implications." *Transport Reviews* 37 (2): 192–210.
- Natera, Luis, Federico Battiston, Gerardo Iñiguez, and Michael Szell. 2019. "Data-Driven Strategies for Optimal Bicycle Network Growth." *arXiv Preprint arXiv:1907.07080*.
- Olmos, Luis E, Maria Sol Tadeo, Dimitris Vlachogiannis, Fahad Alhasoun, Xavier Espinet Alegre, Catalina Ochoa, Felipe Targa, and Marta C González. 2020. "A Data Science Framework for Planning the Growth of Bicycle Infrastructures." *Transportation Research Part C: Emerging Technologies* 115: 102640.
- ONS. 2011. "2011 Census: Special Workplace Statistics (United Kingdom)."
- . 2018. "Population Estimates for the Uk, England and Wales, Scotland and Northern Ireland: Mid-2017." *Hampshire: Office for National Statistics*.
- Padgham, Mark. 2019. "Dodgr: An R Package for Network Flow Aggregation." *Transport Findings. Network Design Lab*.
- Parkin, John. 2018. *Designing for Cycle Traffic*. ICE Publishing. <https://doi.org/10.1680/dfct.63495>.
- Patterson, Richard, Jenna Panter, Eszter P Vamos, Steven Cummins, Christopher Millett, and Anthony A Laverty. 2020. "Associations Between Commute Mode and Cardiovascular Disease, Cancer, and All-Cause Mortality, and Cancer Incidence, Using Linked Census Data over 25 Years in England and Wales: A Cohort Study." *The Lancet Planetary Health* 4 (5): e186–e194.
- Pereira, Rafael HM, Tim Schwanen, and David Banister. 2017. "Distributive Justice and Equity in Transportation." *Transport Reviews* 37 (2): 170–91.
- Pucher, John, and Ralph Buehler. 2008. "Making Cycling Irresistible: Lessons from the Netherlands, Denmark and Germany." *Transport Reviews* 28 (4): 495–528.
- Pucher, John, Jennifer Dill, and Susan Handy. 2010. "Infrastructure, Programs, and Policies to Increase Bicycling: An International Review." *Preventive Medicine* 50: S106–S125.
- Schoner, Jessica E, and David M Levinson. 2014. "The Missing Link: Bicycle Infrastructure Networks and Ridership in 74 Us Cities." *Transportation* 41 (6): 1187–1204.
- Stinson, Monique A, and Chandra R Bhat. 2003. "Commuter Bicyclist Route Choice: Analysis Using a Stated Preference Survey." *Transportation Research Record* 1828 (1): 107–15.
- UN. 2015. "Paris Agreement." In *Report of the Conference of the Parties to the United Nations Framework Convention on Climate Change (21st Session, 2015: Paris)*. Retrieved December, 4:2017. HeinOnline.

Wardman, Mark, Miles Tight, and Matthew Page. 2007. "Factors Influencing the Propensity to Cycle to Work." *Transportation Research Part A: Policy and Practice* 41 (4): 339–50. <https://doi.org/10.1016/j.tra.2006.09.011>.

Winters, Meghan, Gavin Davidson, Diana Kao, and Kay Teschke. 2011. "Motivators and Deterrents of Bicycling: Comparing Influences on Decisions to Ride." *Transportation* 38 (1): 153–68.

Winters, Meghan, Kay Teschke, Michael Grant, Eleanor M Setton, and Michael Brauer. 2010. "How Far Out of the Way Will We Travel? Built Environment Influences on Route Selection for Bicycle and Car Travel." *Transportation Research Record* 2190 (1): 1–10.