

CURRENT CIRCUIT	CONDUCTOR	WIRING COLOUR	MINIMUM CROSS-SECTION
3-PHASE POWER	L1	BROWN	2.5mm2
3-PHASE POWER	L2	BLACK	2.5mm2
3-PHASE POWER	L3	GREY	2.5mm2
3-PHASE NEUTRAL	N	LIGHT BLUE	2.5mm2
1-PHASE POWER	L1	BROWN	1.5mm2
1-PHASE POWER	N	LIGHT BLUE	1.5mm2
24VDC	+	DARK BLUE	1.5mm2
24VDC	-	DARK BLUE	1.5mm2
MEASURING	+/-	GREY	0.5mm2
EXTERNAL VOLTAGE		ORANGE	1.5mm2
PROTECTIVE EARTH CONDUCTOR	PE	GREEN/YELLOW	1.5mm2

MEASURING LINES:

☒ SINGLE CONDUCTOR

☐ TWISTED PAIRS

☒ ANALOGUE SIGNAL IN SHIELDED PAIRS

WIRE MARKING:

☐ NONE

☐ WIRE DESIGNATION, SEMI OPEN

☐ WIRE TARGET DESTINATION

☒ CURRENT PATH DESIGNATION

CONSTRUCTION NOTES:

1. TERMINALS:

POWER WDU4

INSTRUMENT WDU2.5

TYPE OF CONNECTION:

☒ WIRE END BOOTLACE CRIMP

☐ WIRE END PIN CRIMP

☐ FORK TYPE CRIMP

☐ ISOLATED


☐ NO CRIMP

SPECIFICS:

☐ HALOGEN FREE

☒ IP20 FOR INFEED TERMINALS

☒ BUS-BAR PE

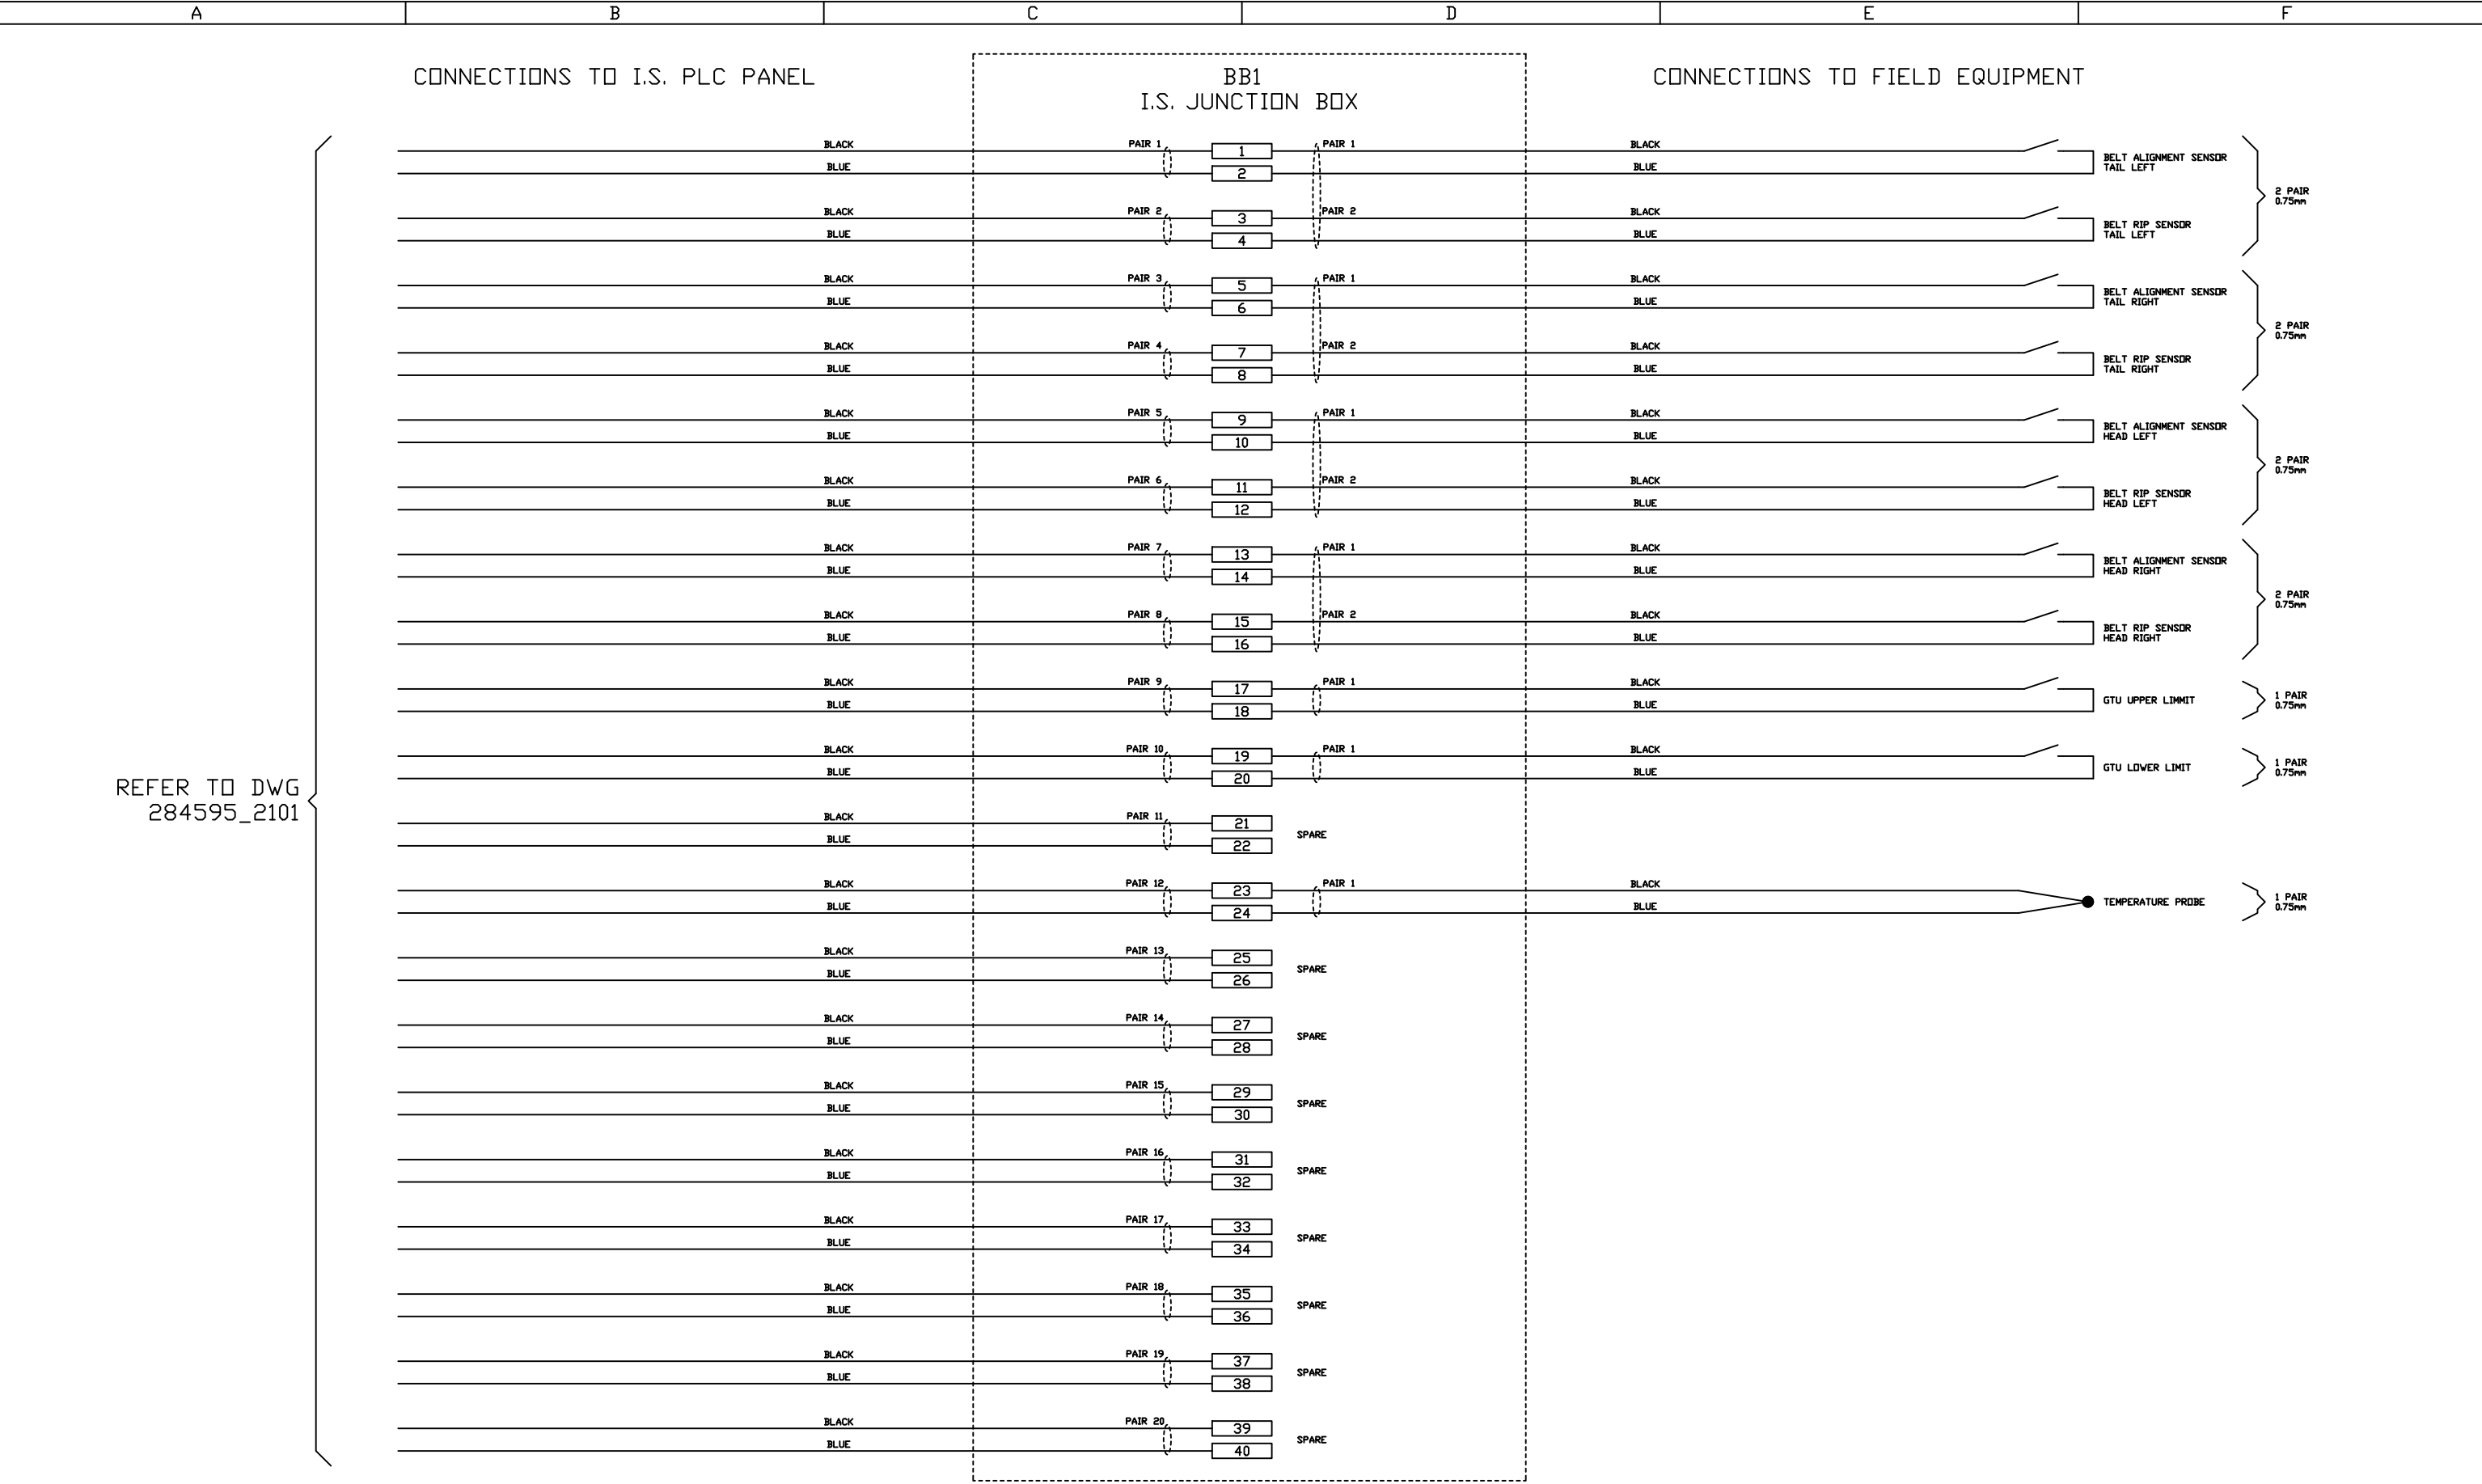

REFER TO DWG
284595_2101



HF Controls Ltd
100 Albert Drive, Glasgow, G41 2SJ
Call 0800 783 9480





www.hf-group.co.uk

Glasgow Edinburgh Manchester Belfast Aberdeen

REV	DATE	DETAIL	CLIENT	PEEL PORTS	ENGINEERED	B.DUFFY
00	12/11/24	AS FITTED			DRAWN	D.BALDOCK
01					CHECKED	M.WRIGHT
02					DATE	10/10/2022
03					DRG. No.:	284595_0231
04						
05						
06						
07						

TITLE	INSTALL	PEEL PORTS	ENGINEERED	B.DUFFY
BB1 / BB2 / BB3 RB3 / RB4 / MC1 JB WIRING SCHEMATICS			DRAWING REVISION :	PAGE No.:
			00	03 OF 08

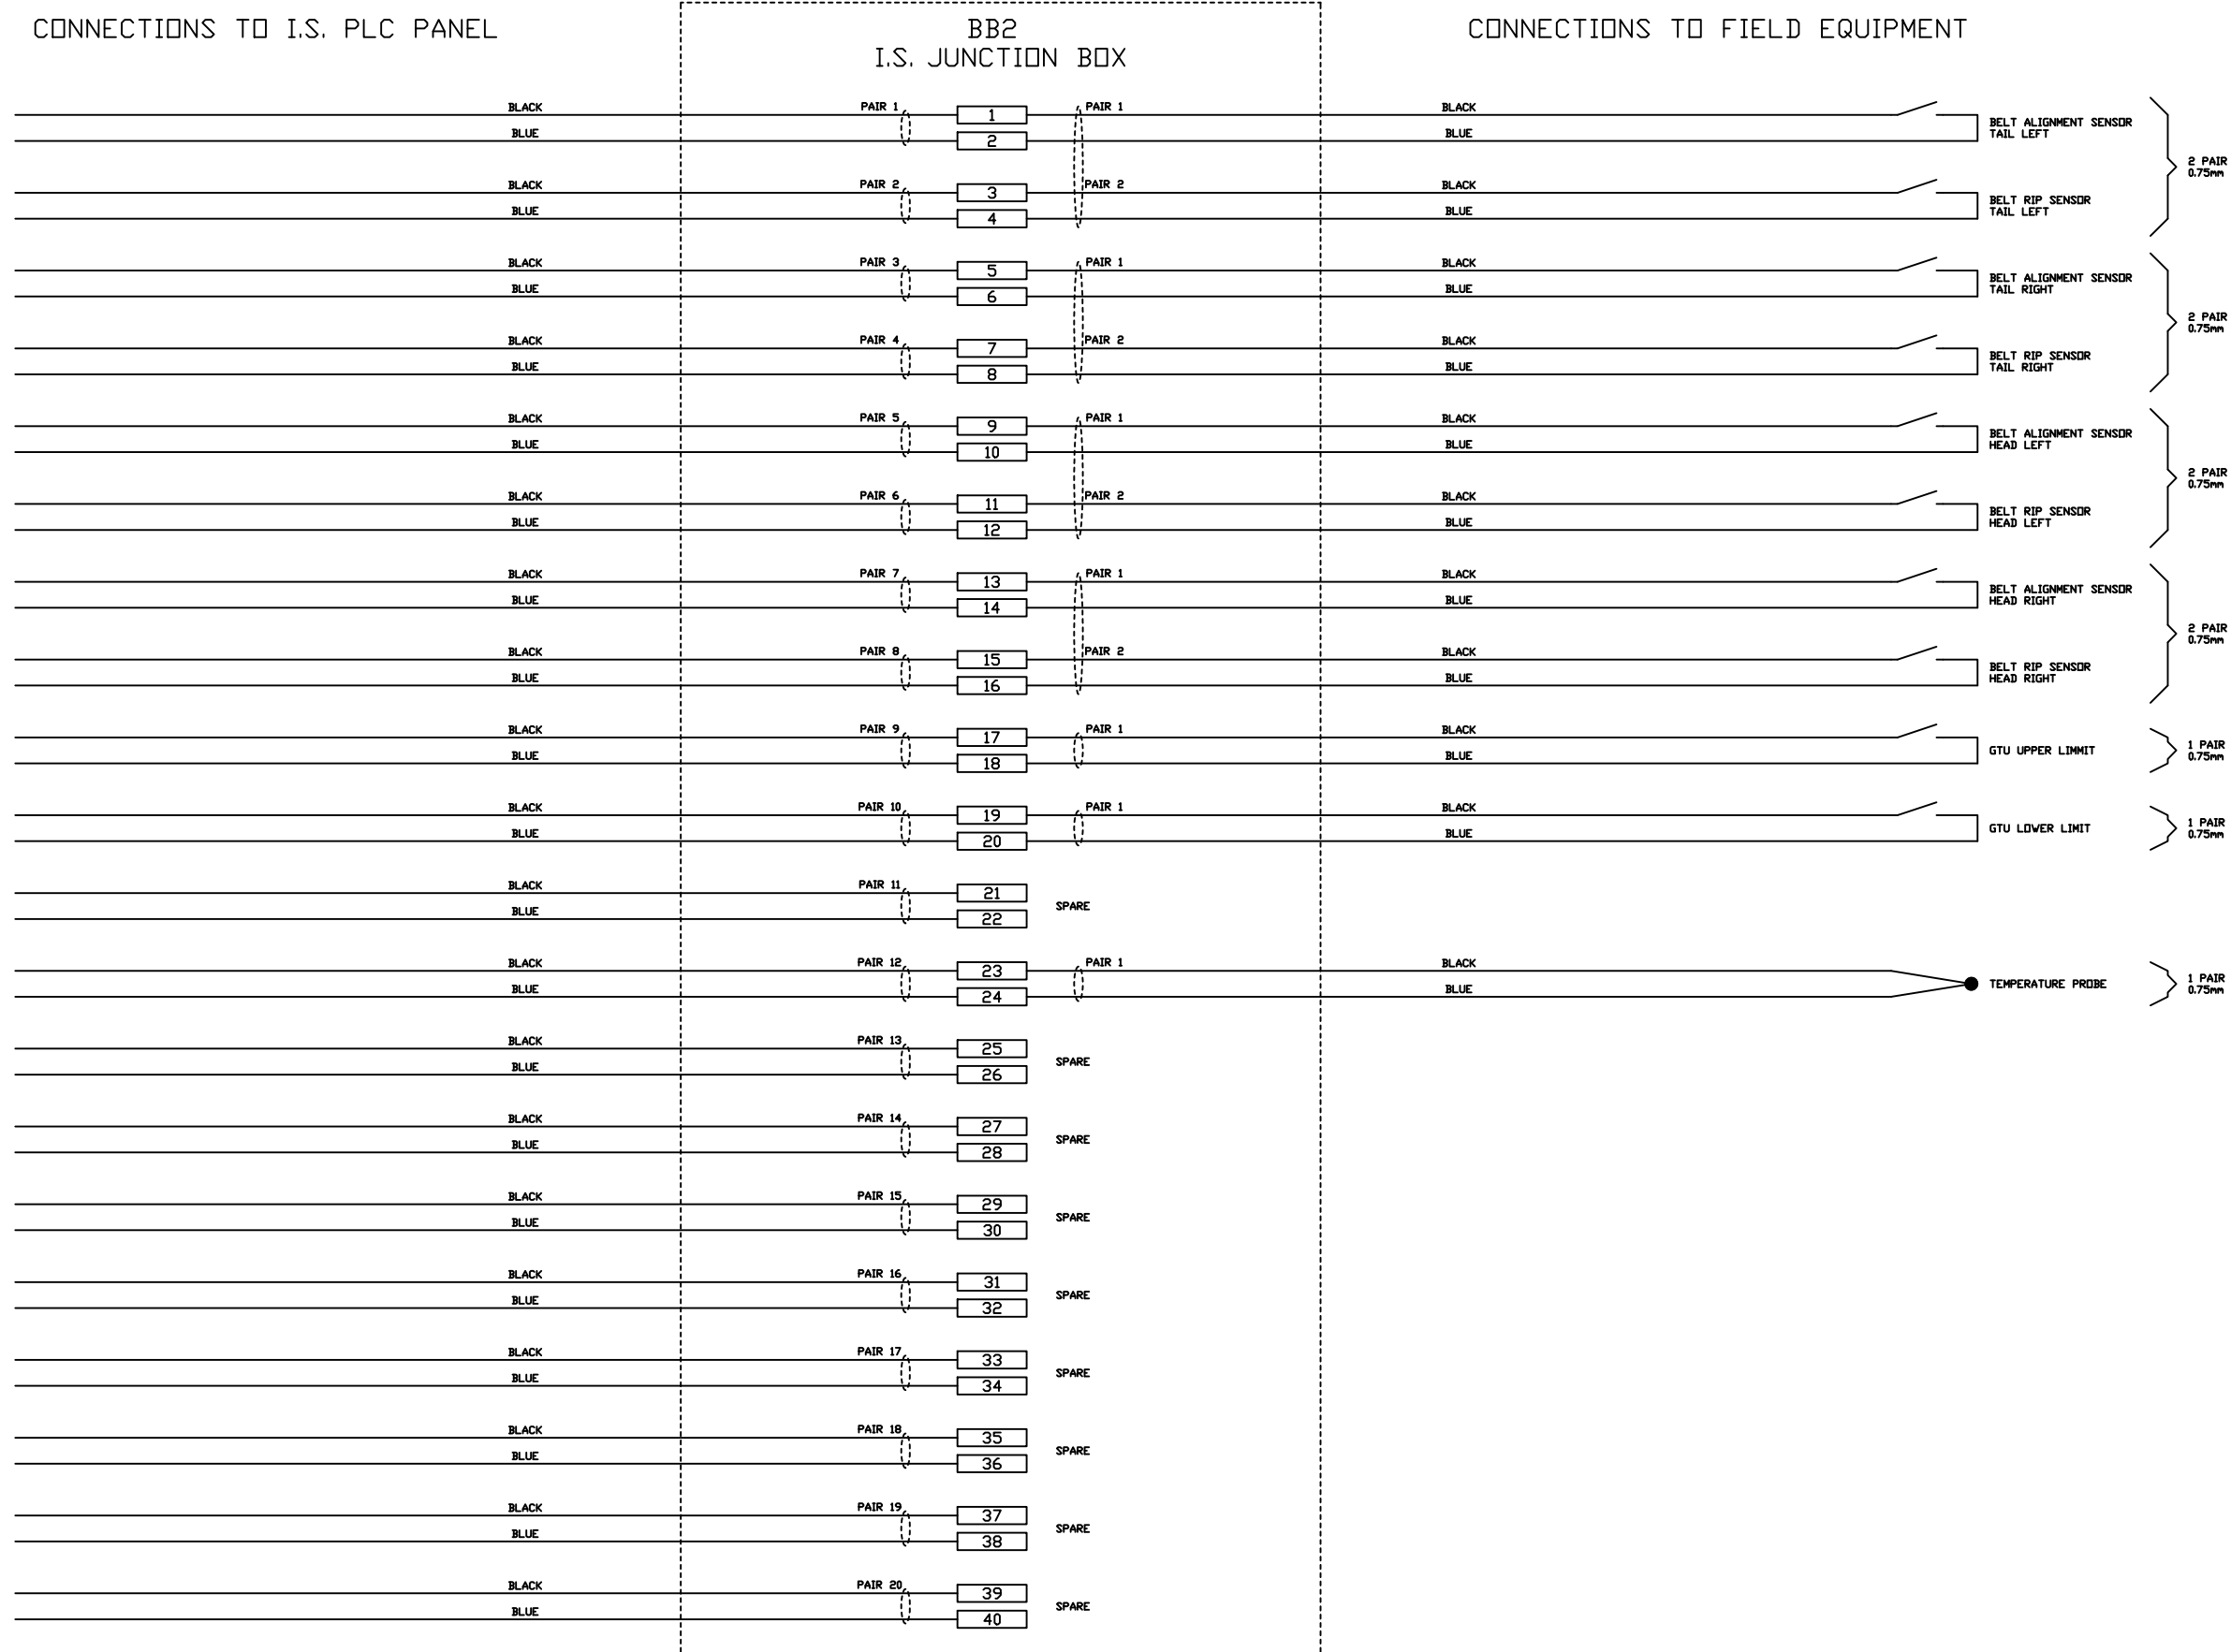

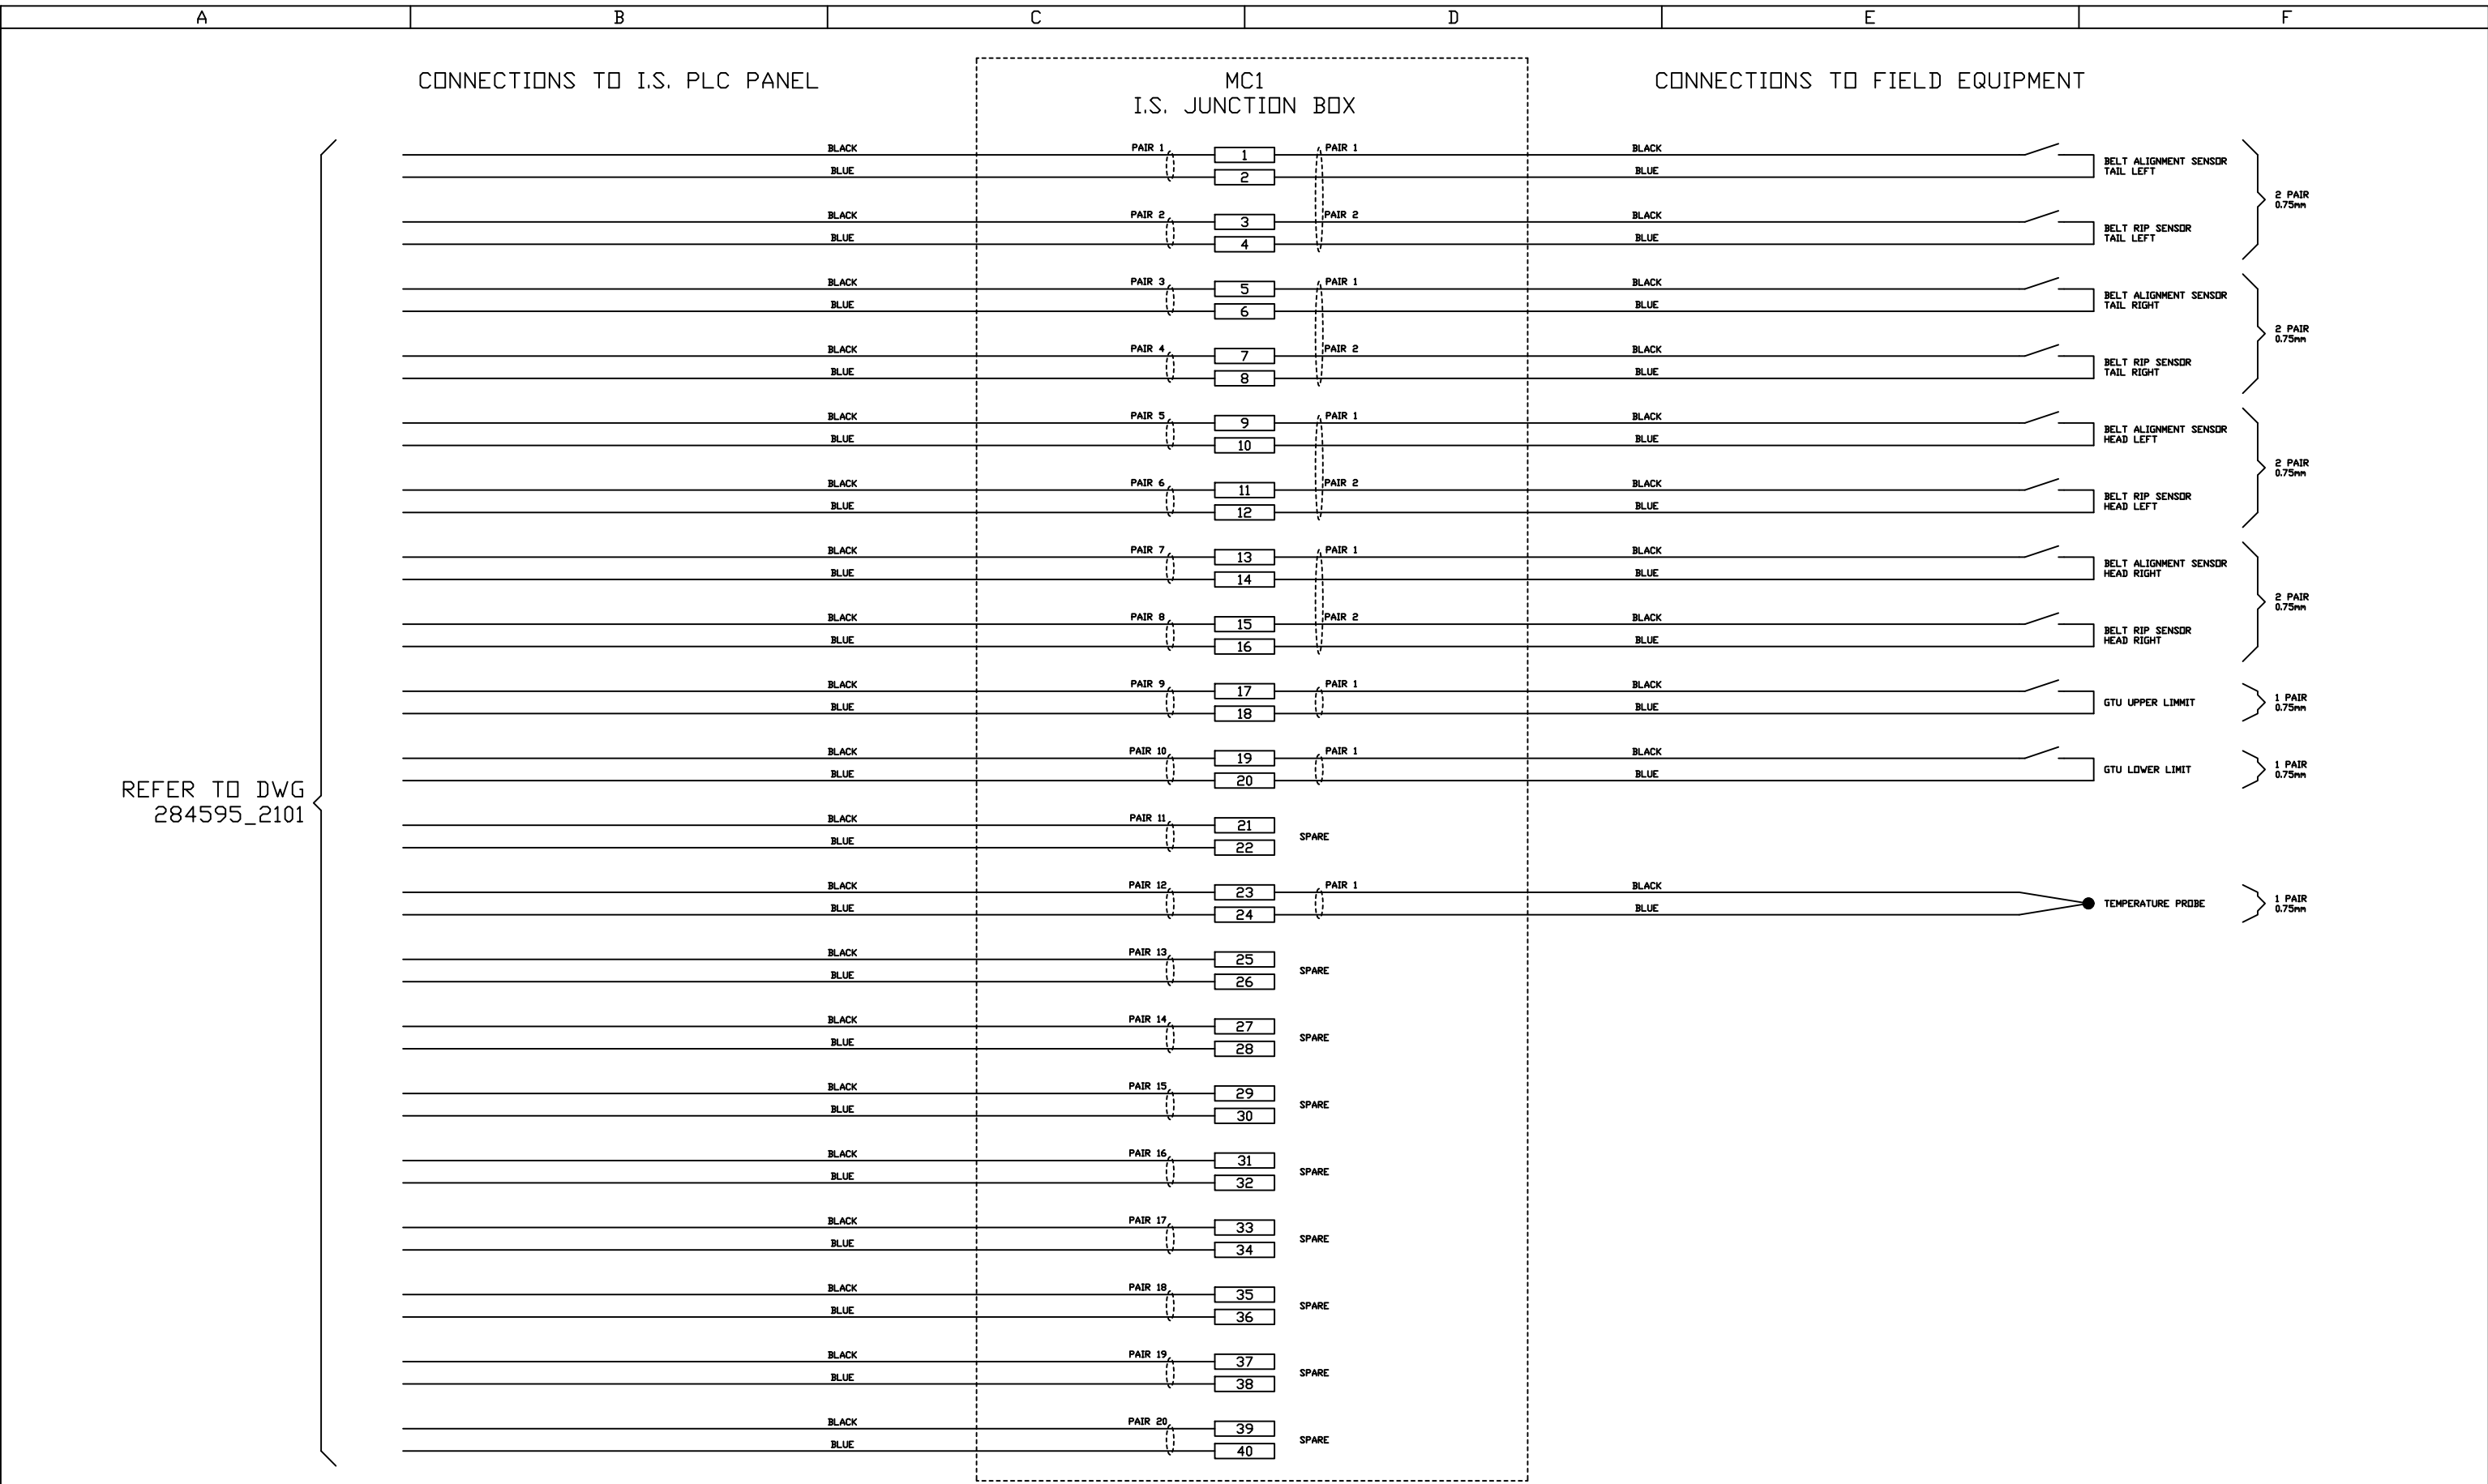

REFER TO DWG
284595_2101