

PIPE SPOOLS

[1]

For installation tolerances dimensions to be checked by pipe contractor at site.

ive	2014/68/EU	Hazardous CLP content		Rev	Revision Note	Created by	Checked by	Approved by	Date
		Pipe Class	/119440-VE161C1C-R00	1	Updated, TIE-IN added, support changed	J. Lakka	T. Saarinen	M. Kankkunen	19/5/2026
				0		J. Lakka	T. Saarinen	M. Kankkunen	29/4/2026

press. (mm)	-10bar	PCD Category	Tervasaari, Valkeakoski		Höyry- ja lauhdejärjestelmä						
temp. (min)	-	Media	Project Key TERPMS_N265A		Project Name Ter PM 5 Safe Future		Project Number N5265A		Work		
low press. (PS)	-	Standard	Projection Method		Welding Symbols General Tolerances		ISO 2768-mK-E ISO 2768-mK-E		Scale	Size	Weight

ing press.	3.5bar	P&ID	RAUF00303	 This document is the exclusive intellectual property of Valmet Corporation and/or its subsidiaries (collectively and individually "Valmet") and is furnished solely for executing and maintaining the specific project. Re-use of the document for any other project or purpose is prohibited. The document or the information shall not be reproduced, copied or disclosed to any third party without the prior written consent of Valmet. By accessing this document, you accept these terms of use.
ing temp.	156degC	Design press.	6bar	

Module	-	Design Temp.	220degC	50154-HMP-250-16C1B		
Group	-	Test press.	-			
Loads	-	Pipe list doc. ID	RAUAF04300	Status CERTIFIED	Document ID	Sheet

al loads	-	Valve list doc. ID	RAUAF04301	Security Classification Internal	Revision 1
	6		7		8

		Hazardous CLP content	
Directive	2014/68/EU	Pipe Class	/119440-VE16C1C-R00
Design press. (min)	-1bar	PED Category	I
Design temp. (min)	-	Media	
Max. allow. press. (PS)	-	Standard	
Operating press.	3.5bar	P&ID	RAU8F00303
Operating temp.	156degC	Design press.	6bar
PED Module	-	Design temp.	220degC
PED Group	-	Test press.	-
Wind loads	-	Pipe list doc. ID	RAUAF04300
External loads	-	Valve list doc. ID	RAUAF04301

Rev	Revision Note	Created by		Checked by	Approved by	Date
1	Updated, TIE-IN added, support changed	J. Lakka	T. Saarinen	M. Kankkunen	19/5/2026	
0		J. Lakka	T. Saarinen	M. Kankkunen	29/4/2026	
Site	Equipment Type		Equipment Type		Equipment ID	
Tervasaari, Valkeakoski	Hoivry- ja lauhdejärjestelmä					
Project Key TERPM5_N5265A		Project Name Ter PM 5 Safe Future		Project Number N5265A		Work
Projection Method	Welding Symbols ISO 2553	General Tolerances ISO 13 02-0-BF	ISO 2768-mK-E	ISO 2768-mK-E	Scale -	Size A1
This document is the exclusive intellectual property of Valmet Corporation and/or its subsidiaries (collectively and individually "Valmet") and is furnished solely for executing and maintaining the specific project. Re-use of the document for any other project or purpose is prohibited. The document or the information shall not be reproduced, copied or disclosed to any third party without the prior written consent of Valmet. By accessing this document, you accept these terms of use. 						
Title 50154-HMP-250-16C1B						
Status CERTIFIED		Document ID				Sheet 1 / 3
Security Classification Internal						Revision 1


E L_4

For installation tolerances dimensions to be checked by pipe contractor at site.
Degree of prefabrication to be decided by contractor.

BD

[2] [3] [4] [5]

[2] [3] [4] [5]

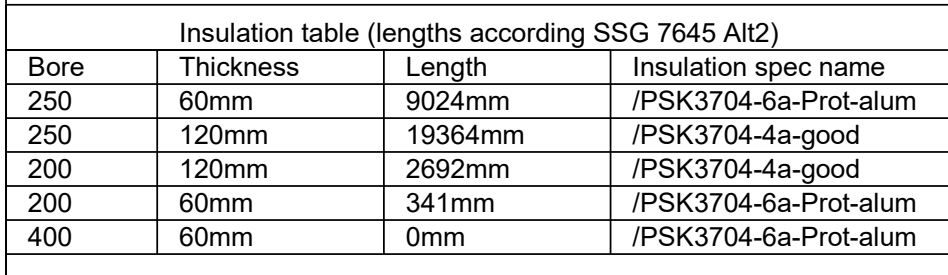

Welding factor	Acc. to pipe class
----------------	--------------------

		Hazardous CLP content		Figure 1: Information to be decided by customer					
Directive	2014/68/EU	Pipe Class	/119440-VE16C1C-R00	Rev/ Revision Note		Created by	Checked by	Approved by	Date
Design press. (min)	-1bar	PED Category	I	1 0	Updated, TIE-IN added, support changed	J. Lakka	T. Saarinen	M. Kankkunen	19/5/2026
Design temp. (min)	-	Media		Site	Tervasaari, Valkeakoski	Equipment Type	Höyry- ja lauhdejärjestelmä	M. Kankkunen	29/4/2026
Max. allow. press. (PS)	-	Standard		Project Key	TERFMS_NS265A	Project Name	Tier PM 5 Safe Future	Project Number	NS265A
Operating press.	3.5bar	P&ID	RAUF00303	Projection Method	 ISO 2553	General Tolerances	ISO 130 92-BF	ISO 2768-mK-E	ISO 2768-mK-E
Operating temp.	156degC	Design press	6bar	This document is the exclusive intellectual property of Valmet Corporation and/or its subsidiaries (collectively and individually "Valmet") and is furnished solely for executing and maintaining the specific project. Re-use of the document for any other project or purpose is prohibited. The document or the information shall not be reproduced, copied or disclosed to any third party without the prior written consent of Valmet. By accessing this document, you accept these terms of use.					
PED Module	-	Design temp.	220degC	Title					
PED Group	-	Test press.	-	50154-HMP-250-16C1B					
Wind loads	-	Pipe list doc. ID	RAUAF04300	Status	CERTIFIED	Document ID			
External loads	-	Valve list doc. ID	RAUAF04301	Security Classification	Internal				Revision 1