


A
B

F

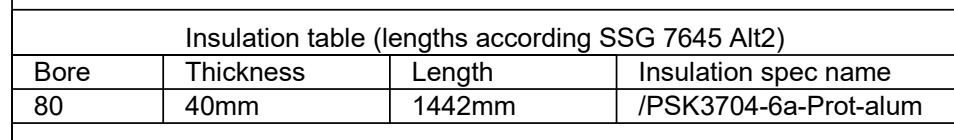

		Hazardous CLP content		Degree of prehabilitation to be decided by contractor.						
				Rev/ Revision Note		Created by		Checked by	Approved by	Date
Directive	2014/68/EU	Pipe Class	/119440-VE16C1C-R00	0		J. Lakka		T. Saarinen	M. Kankkunen	5/5/2026
Design press. (min)	-1bar	PED Category	I	Site Tervasaari, Valkeakoski		Equipment Type Höyry- ja lauhdejärjestelmä		Equipment ID		
Design temp. (min)	-	Media		Project Key TERPMS_N5265A		Project Name TM Pm-5 Sato Future		Project Number N5265A		Work -
Max. allow. press. (PS)	-	Standard		Projection Method ☐ ⊕ ISO 2553		General Tolerances ISO 13 920-BF ISO 2768-mK-E ISO 2768-mK-E ISO 2768-mK-E		Scale -	Size A	Weight -
Operating press.	5.9bar	P&ID	RAUAF00303	 This document is the exclusive intellectual property of Valmet Corporation and/or its subsidiaries (collectively and individually "Valmet") and is furnished solely for executing and maintaining the specific project. Re-use of the document for any other project or purpose is prohibited. The document or the information shall not be reproduced, copied or disclosed to any third party without the prior written consent of Valmet. By accessing this document, you accept these terms of use.						
Operating temp.	181degC	Design press.	6bar							
PED Module	-	Design temp.	220degC	Title		50169-HMP-80-16C1B				
PED Group	-	Test press.	-							
Wind loads	-	Pipe list doc ID	RAUAF04300	Status CERTIFIED		Document ID				Sheet 1 / 1
External loads	-	Valve list doc ID	RAUAF04301	Security Classification Internal						Revision 0

Valmet  This document is the exclusive intellectual property of Valmet Corporation and/or its subsidiaries (collectively and individually "Valmet") and is furnished solely for executing and maintaining the specific project. Re-use of the document for any other project or purpose is prohibited. The document or the information shall not be reproduced, copied or disclosed to any third party without the prior written consent of Valmet. By accessing this document, you accept these terms of use.