
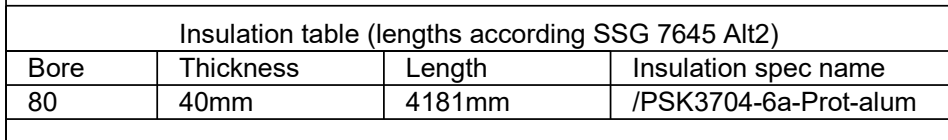


PIPE SPOOLS

[1] [2]



Welding factor	Acc. to pipe class
Efficiency of long. weld	Acc. to pipe class
NDT circ. weld %	-
NDT long. weld %	-
Welding list see doc.	-

		Hazardous CLP content		Legal representation to be decided by customer						
Directive	2014/68/EU	Pipe Class	/I19440-VE16C1C-R00	Rev/ Revision Note		Created by		Checked by	Approved by	Date
Design press. (min)	-1bar	PED Category	I	0		J. Lakka	T. Saarinen	M. Kankkunen		5/5/2026
Design temp. (min)	-	Media		Site	Project Name	Equipment Type		Project Number		Work
Max. allow. press. (PS)	-	Standard		Tervasaari, Valkeakoski	TERFMS_N5265A Ter PM 5 Safe Future	Höyry- ja lauhdejärjestelmä		NS265A		
Operating press.	5.9bar	P&ID	RAU8F00303	Projection Method	Welding Symbols	General Tolerances		Scale	Size	Weight
Operating temp.	181degC	Design press.	6bar	 ISO 5553		ISO 13 920-BF ISO 2768-mK-E ISO 2768-mK-E ISO 2768-mK-E		-	A1	-
PED Module	-	Design temp.	220degC	 This document is the exclusive intellectual property of Valmet Corporation and/or its subsidiaries (collectively and individually "Valmet") and is furnished solely for executing and maintaining the specific project. Re-use of the document for any other project or purpose is prohibited. The document or the information shall not be reproduced, copied or disclosed to any third party without the prior written consent of Valmet. By accessing this document, you accept these terms of use.						
PED Group	-	Test press.	-	Title						
Wind loads	-	Pipe list doc. ID	RAUAF04300	50171-HMP-80-16C1B						
External loads	-	Valve list doc. ID	RAUAF04301	Status	CERTIFIED	Document ID		Sheet 1 / 1		
				Security Classification	Internal					Revision 0