


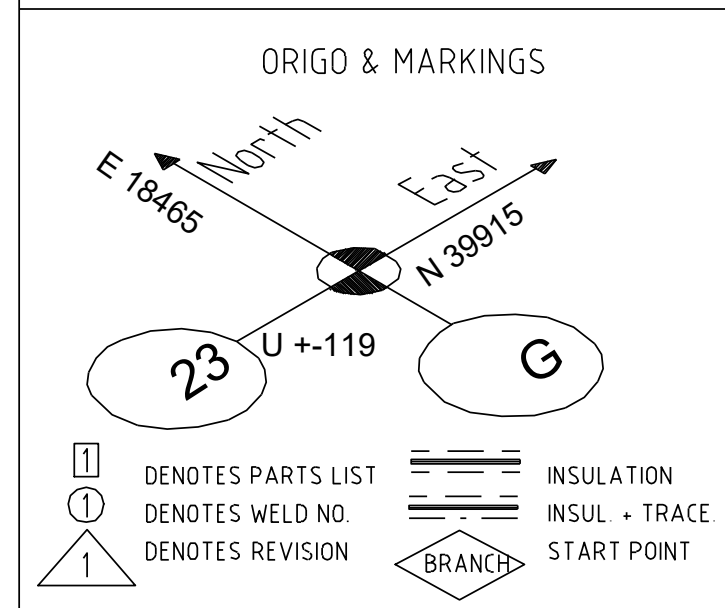

NOTE:

Site weldings to be added by contractor.

Buildings construction and equipment erection tolerances to be checked by contractor.

Pipe levels and dimensions are according to pipe center line.

Isometric drawings for sizes DN 15-25 are approximate.

Piping contractor is responsible for final routing and supporting.

		Hazardous CLP content	
Directive	2014/68/EU	Pipe Class	/119440-VE16H1A-R00
Design press. (min)	-1bar	PED Category	I
Design temp. (min)	-	Media	
Max. allow. press. (PS)	-	Standard	
Operating press.	5.7bar	P&ID	RAUF00303
Operating temp	164degC	Design press.	6bar
PED Module	-	Design temp.	220degC
PED Group	-	Test press.	-
Wind loads	-	Pipe list doc. ID	RAUAF04300
External loads	-	Valve list doc. ID	RAUAF04301

For installation tolerances dimensions to be checked by pipe contractor at site.							
Degree of prefabrication to be decided by contractor.							
Rev	Revision Note		Created by	Checked by	Approved by		Date
0			J. Lakka	T. Saarinen	M. Kankkunen		5/5/2026
Site	Tervasaari, Valkeakoski		Equipment Type Höyry- ja lauhdejärjestelmä			Equipment ID	
Project Key	Project Name		Project Number			Work	
	TERPMK_NIS2059A		NIS2059A				
	Ter PM S Safe Future						
Projection Method	Welding Symbols	General Tolerances	ISO 2768 -mK-E	ISO 2768 -mK-E	Scale	Size	Weight
	ISO 2553	ISO 13 920-BF	ISO 2768 -mK-E	ISO 2768 -mK-E	-	A1	-
		This document is the exclusive intellectual property of Valmet Corporation and/or its subsidiaries (collectively and individually "Valmet") and is furnished solely for executing and maintaining the specific project. Re-use of the document for any other project or purpose is prohibited. The document or the information shall not be reproduced, copied or disclosed to a third party without the prior written consent of Valmet. By accessing this document, you accept these terms of use.					
Title							
50202-VLA-50-16H1A							
Status	Document ID			Sheet			
CERTIFIED				1 / 1			
Security Classification Internal				Revision 0			