


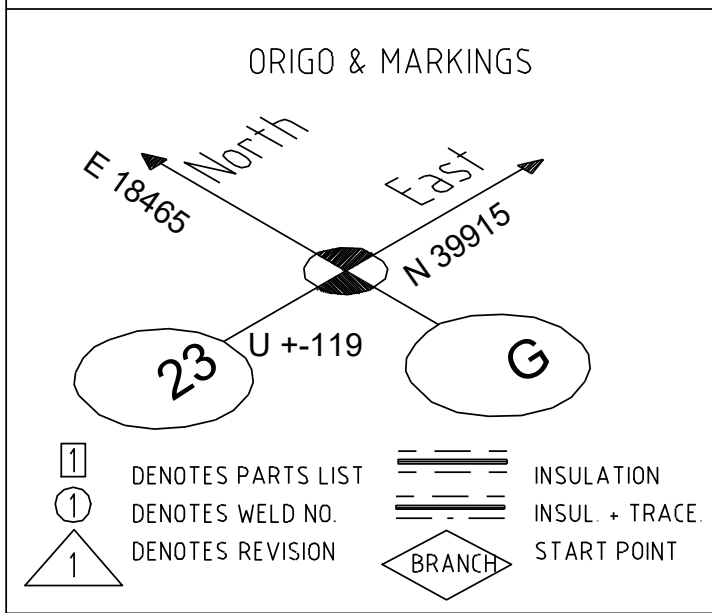

Insulation table (lengths according SSG 7645 Alt2)			
Bore	Thickness	Length	Insulation spec name
100	80mm	3002mm	/PSK3704-3a-basic
15	30mm	240mm	/PSK3704-6a-Prot-alum

		Hazardous CLP content	
Directive	2014/68/EU	Pipe Class	/119440-VE16C1C-R00
Design press. (min)	-1bar	PED Category	I
Design temp. (min)	-	Media	
Max. allow. press. (PS)	-	Standard	
Operating press.	5.7bar	P&ID	RAUF00303
Operating temp.	164degC	Design press.	6bar
PED Module	-	Design temp.	220degC
PED Group	-	Test press.	-
Wind loads	-	Pipe list doc. ID	RAUAF04300
External loads	-	Valve list doc. ID	RAUAF04301

Rev		Revision Note		Created by		Checked by		Approved by		Date	
0				J. Lakka		T. Saarinen		M. Kankkunen		5/5/2026	
Site		Tervasaari, Valkeakoski		Equipment Type		Höyry- ja lauhdejärjestelmä				Equipment ID	
Project Key		Project Name				Project Number				Work	
TERPMS_N5265A		Ter PM 5 Safe Future				N5265A					
Projection Method		Welding Symbols		General Tolerances		ISO 2768-mK-E		ISO 2768-mK-E		Scale	
ISO 2553				ISO 1302-BF		ISO 2768-mK-E		ISO 2768-mK-E		Size A1	
										Weight -	
		This document is the exclusive intellectual property of Valmet Corporation and/or its subsidiaries (collectively and individually "Valmet") and is furnished solely for executing and maintaining the specific project. Re-use of the document for any other project or purpose is prohibited. The document or the information shall not be reproduced, copied or disclosed to any third party without the prior written consent of Valmet. By accessing this document, you accept these terms of use.									
Title		50207-VLA-100-16C1B									
Status		CERTIFIED		Document ID						Sheet 1 / 1	
Security Classification		Internal								Revision 0	