


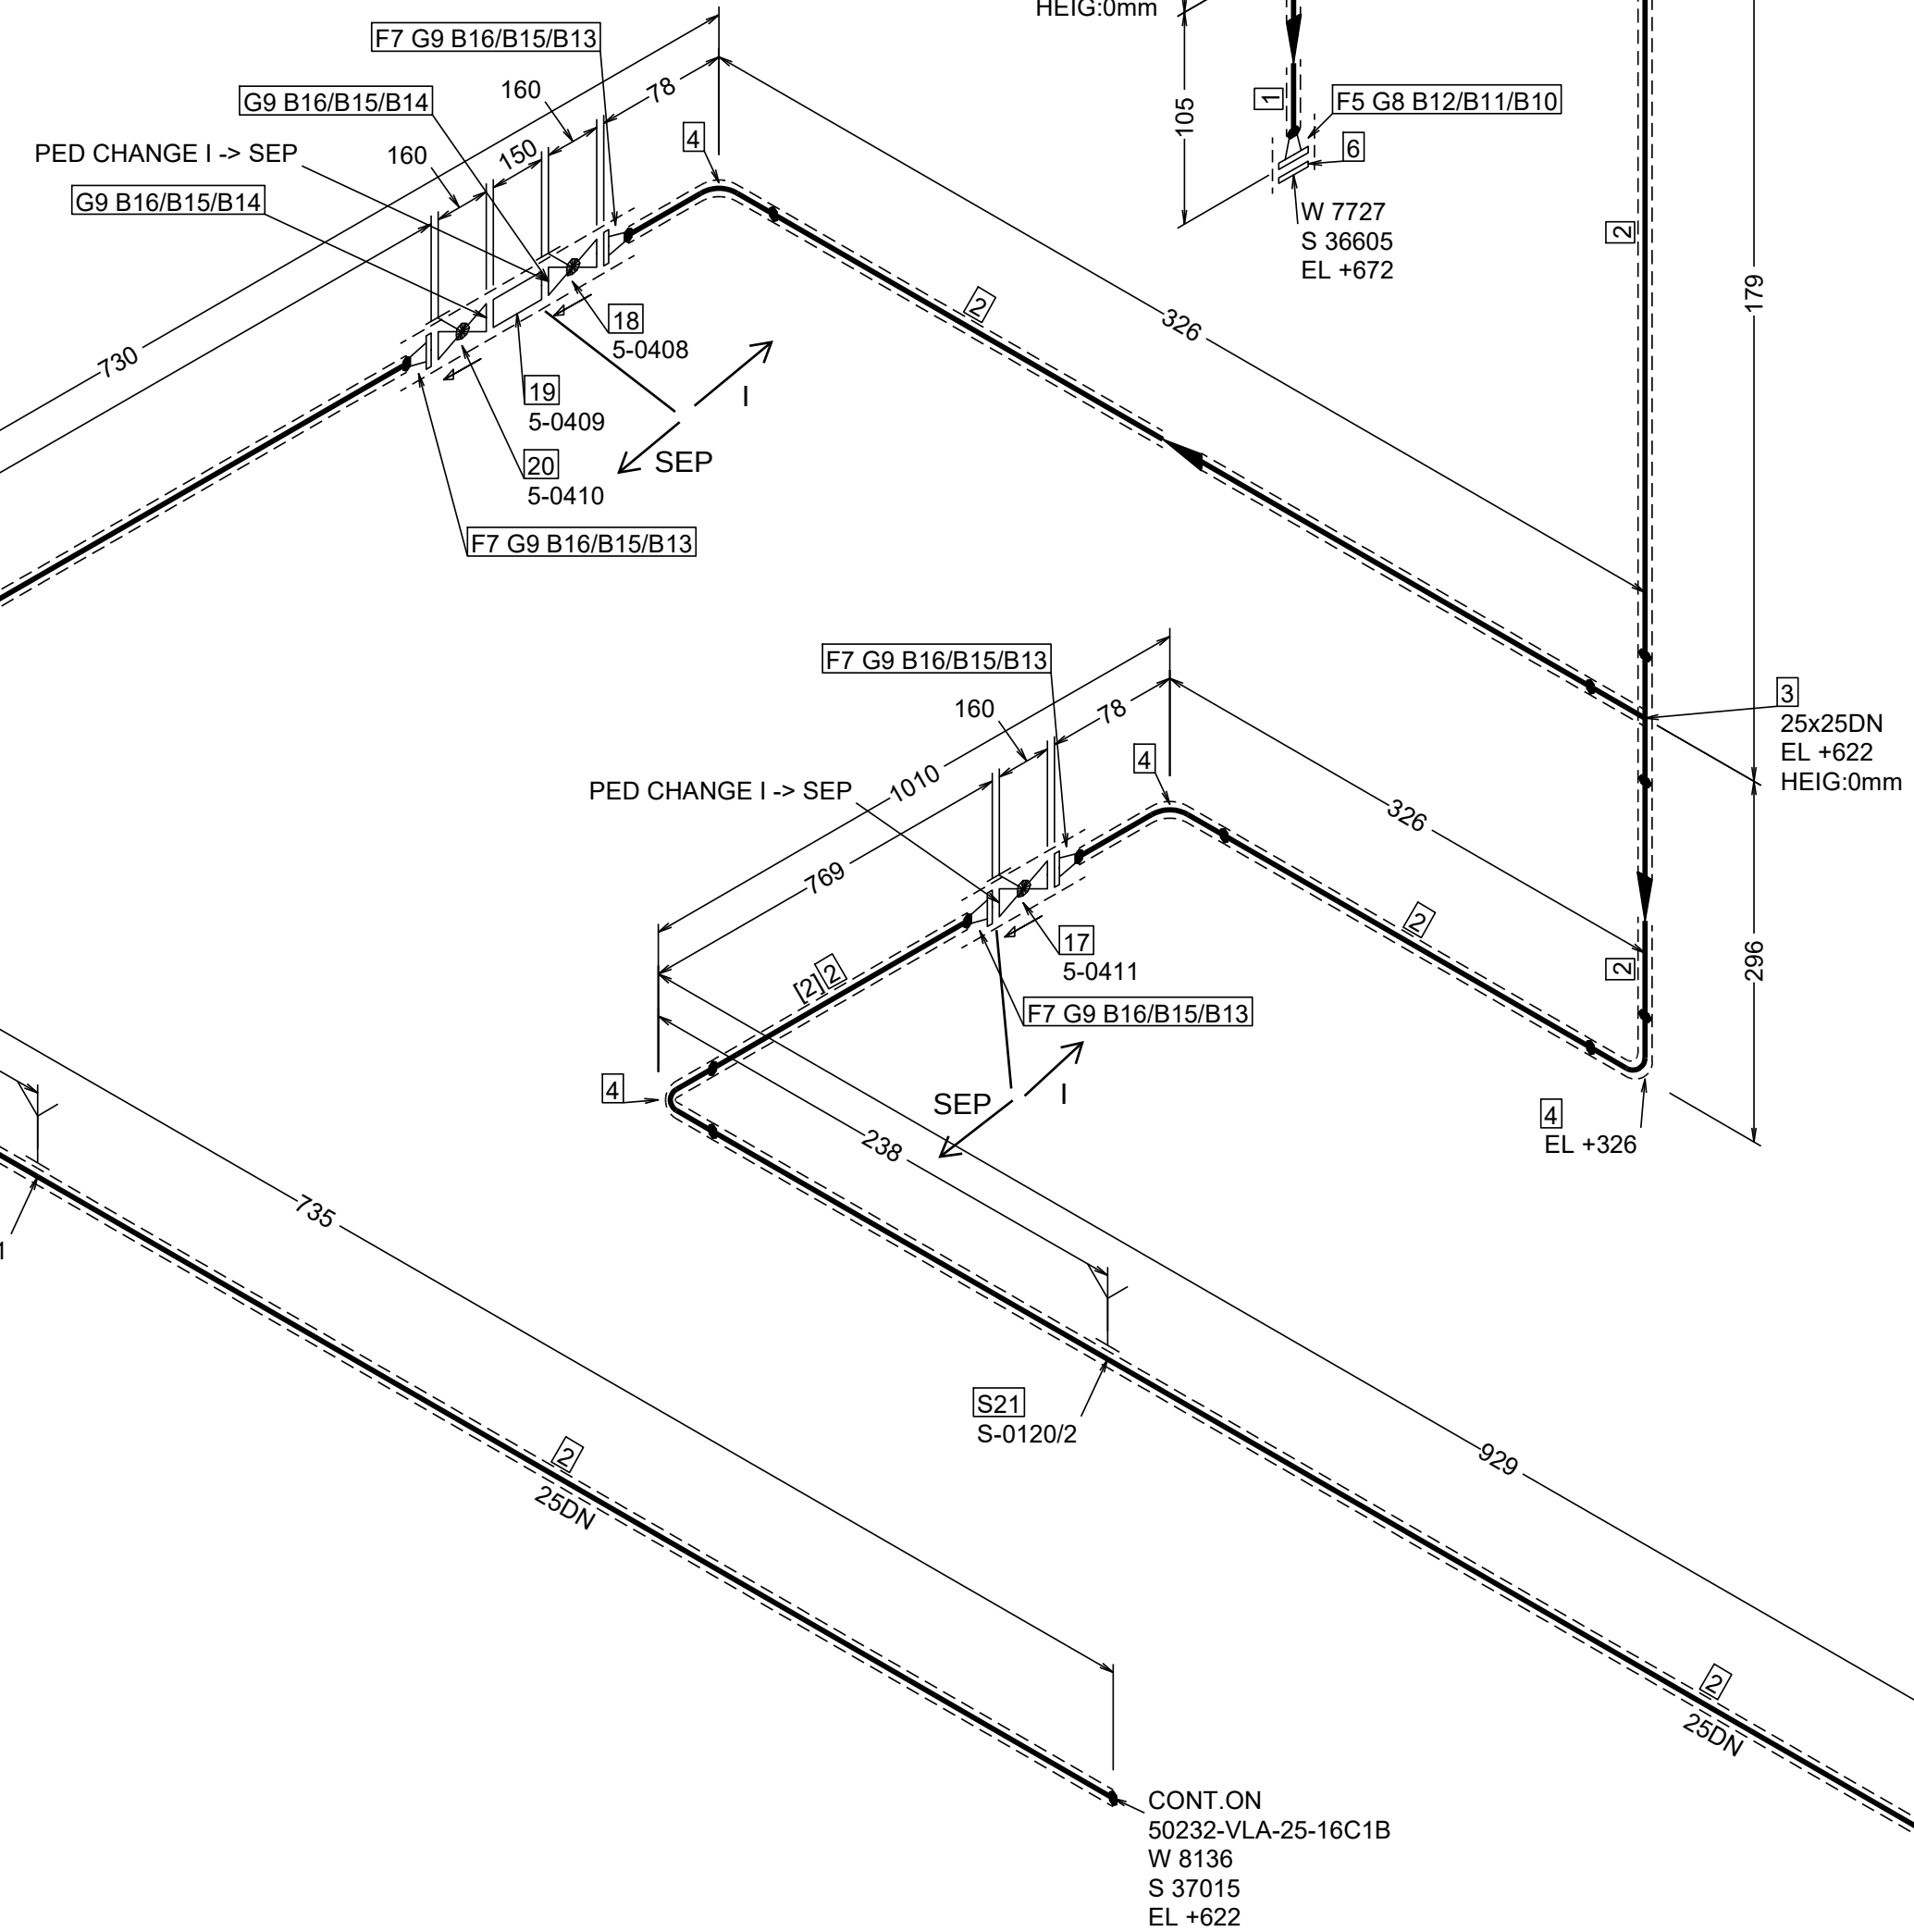

NO	PART DESCRIPTION	DN (MM)	PIPE SPEC	QUANTITY
8	Gasket - EN 1514-1 - type IBC - OD168.3/DN150 - 1.5mm Thk - PN16 Fiber	150	119440-VE16C1C-R00	1
9	Gasket - EN 1514-1 - type IBC - OD33.7/DN25 - 1.5mm Thk - PN40 Fiber	25	119440-VE16C1C-R00	6
10	80 mm Bolt EN ISO 4014 25CrMo4, EN 10269, mat cert. 3.1, HDG	20		8
11	Hexagon nut EN ISO 4032 25CrMo4, EN 10269, mat cert. 3.1, HDG	20		8
12	Washer EN ISO 7089 Grade A - S235JR EN10025-2 - HDG	20		16
13	60 mm Bolt EN ISO 4014 25CrMo4, EN 10269, mat cert. 3.1, HDG	12		16
14	55 mm Bolt EN ISO 4014 25CrMo4, EN 10269, mat cert. 3.1, HDG	12		8
15	Hexagon nut EN ISO 4032 25CrMo4, EN 10269, mat cert. 3.1, HDG	12		24
16	Washer EN ISO 7089 Grade A - S235JR EN10025-2 - HDG	12		48
17	BASIC GLOBE VALVE FLANGED PN40 WI HAND WHEEL 5-0411	25	KBE/VALV01	1
18	BASIC GLOBE VALVE FLANGED PN40 WI HAND WHEEL 5-0408	25	KBE/VALV01	1
19	KPK BASIC FILTER FLANGED PN40 5-0409	25	KBE/VALV01	1
20	BASIC GLOBE VALVE FLANGED PN40 WI HAND WHEEL 5-0410	25	KBE/VALV01	1

21 SLIDE SUPPORT PSK 7303 TYPE 1, HIGH See supportlist

[1] [2] [3]

For installation tolerances dimensions to be checked by pipe contractor at site.
Degree of prefabrication to be decided by contractor.

Welding factor	Acc. to pipe class
Efficiency of long. weld	Acc. to pipe class
NDT circ. weld %	-
NDT long. weld %	-
Welding list see doc.	-

