


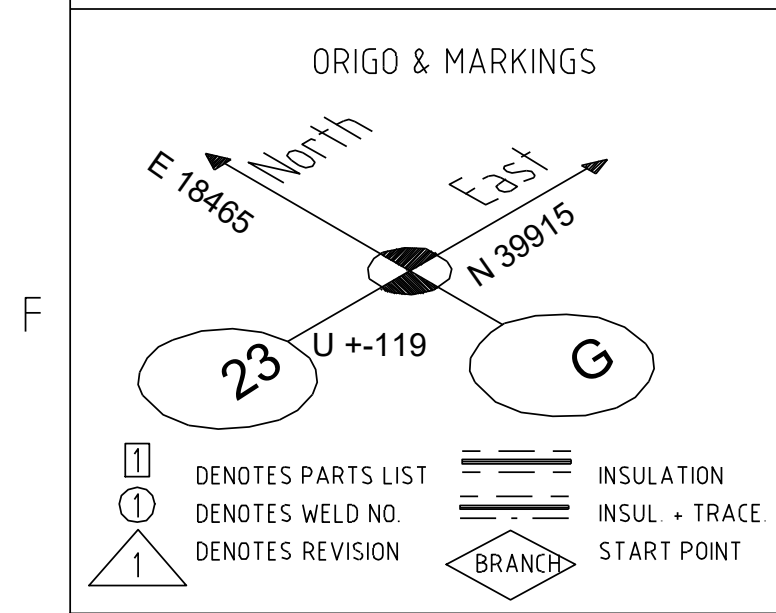

Bore	Thickness	Length	Insulation spec name
40	50mm	27mm	/PSK3704-4a-good
20	50mm	222mm	/PSK3704-4a-good
32	50mm	127mm	/PSK3704-4a-good
32	40mm	44mm	/PSK3704-6a-Prot-alum
40	40mm	1576mm	/PSK3704-6a-Prot-alum
15	50mm	1758mm	/PSK3704-4a-good

Welding factor	Acc. to pipe class
Efficiency of long. weld	Acc. to pipe class
NDT circ. weld %	-
NDT long. weld %	-
Welding list see doc.	-

		Hazardous CLP content		Legal classification to be decided by competent						
Directive	2014/68/EU	Pipe Class	/I19440-VE16C1C-R00	Rev/ Revision Note		Created by		Checked by	Approved by	Date
Design press. (min)	-1bar	PED Category	SEP	0		J. Lakka		T. Saarinen	M. Kankkunen	5/5/2026
Design temp. (min)	-	Media		Site Tervasaari, Valkeakoski		Equipment Type Höyry- ja lauhdejärjestelmä		Equipment ID		
Max. allow. press. (PS)	-	Standard		Project Key TERPM5_N5265A		Project Name Ter PM 5 Safe Future		Project Number N5265A		Work
Operating press.	5bar	P&ID	RAUF00303	Projection Method  ISO 5553		General Tolerances ISO 13 920-BF ISO 2768-mK-E ISO 2768-mK-E ISO 2768-mK-E		Scale -	Size A1	Weight -
Operating temp.	159degC	Design press.	6bar	 This document is the exclusive intellectual property of Valmet Corporation and/or its subsidiaries (collectively and individually "Valmet") and is furnished solely for executing and maintaining the specific project. Re-use of the document for any other project or purpose is prohibited. The document or the information shall not be reproduced, copied or disclosed to any third party without the prior written consent of Valmet. By accessing this document, you accept these terms of use.						
PED Module	-	Design temp.	220degC	Title 50233-HMP-40-16C1B						
PED Group	-	Test press.	-							
Wind loads	-	Pipe list doc. ID	RAUAF04300	Status CERTIFIED		Document ID				Sheet 1 / 1
External loads	-	Valve list doc. ID	RAUAF04301	Security Classification Internal						Revision 0