


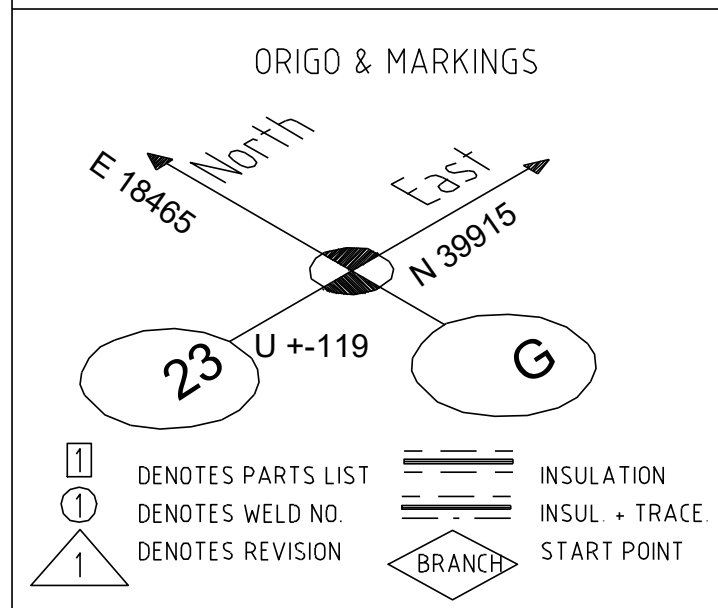

NOTE:

Site weldings to be added by contractor.


Buildings construction and equipment erection tolerances to be checked by contractor.

Pipe levels and dimensions are according to pipe center line.

Isometric drawings for sizes DN 15-25 are approximate.

Piping contractor is responsible for final routing and supporting.

		Hazardous CLP content	
Directive	2014/68/EU	Pipe Class	/119440-VE16C1C-R00
Design press. (min)	-1bar	PED Category	I
Design temp. (min)	-	Media	
Max. allow. press. (PS)	-	Standard	
Operating press.	3.5bar	P&ID	RAUF00303
Operating temp	156degC	Design press.	6bar
PED Module	-	Design temp.	220degC
PED Group	-	Test press.	-
Wind loads	-	Pipe list doc. ID	RAUAF04300
External loads	-	Valve list doc. ID	RAUAF04301

Connection to existing pipe to be checked on site										
For installation tolerances dimensions to be checked by pipe contractor at site.										
Degree of prefabrication to be decided by contractor.										
Rev	Revision Note				Created by		Checked by		Approved by	Date
0					J. Lakka		T. Saarinen		M. Kankkunen	5/5/2026
Site	Tervasaari, Valkeakoski				Equipment type Hyöry- ja lauhdejärjestelmä				Equipment ID	
Project Key	Project Name				Project Number				Work	
TERPMS_N5265A	Ter PM 5 Safe Future				N5265A					
Projection Method			Welding Symbols ISO 2553	General Tolerances ISO 13 920-BF	ISO 2768-mK-E	ISO 2768-mK-E	ISO 2768-mK-E	Scale -	Size A1	Weight -
			This document is the exclusive intellectual property of Valmet Corporation and/or its subsidiaries (collectively and individually "Valmet") and is furnished solely for executing and maintaining the specific project. Re-use of the document for any other project or purpose is prohibited. The document or the information shall not be reproduced, copied or disclosed to any third party without the prior written consent of Valmet. By accessing this document, you accept these terms of use.							
Title										
50151-HMP-200-16C1B										
Status CERTIFIED					Document ID				Sheet 1 / 1	
Security Classification Internal									Revision 0	