


A
B
C
D
E

[1] [2]

		Hazardous CLP content	
Directive	2014/68/EU	Pipe Class	/119440-VE16C1C-R00
Design press. (min)	-1bar	PED Category	SEP
Design temp. (min)	-	Media	
Max. allow. press. (PS)	-	Standard	
Operating press.	5.9bar	P&ID	RAU8F00303
Operating temp.	181degC	Design press.	6bar
PED Module	-	Design temp.	220degC
PED Group	-	Test press.	-
Wind loads	-	Pipe list doc. ID	RAUAF04300
External loads	-	Valve list doc. ID	RAUAF04301

Rev/ Revision Note		Created by		Checked by	Approved by	Date
0		J. Lakka		T. Saarinen	M. Kankkunen	5/5/2026
Site Tervasaari, Valkeakoski		Equipment Type Höyry- ja lauhdejärjestelmä				Equipment ID
Project Key TERPMS_N5265A		Project Name Term P5 Safe Future		Project Number N5265A		Work
Projection Method	Welding Symbols ISO 2553	General Tolerances ISO 2768-mK-E ISO 2768-mK-E ISO 13 920-BF ISO 2768-mK-E ISO 2768-mK-E			Scale	Size
		This document is the exclusive intellectual property of Valmet Corporation and/or its subsidiaries (collectively and individually "Valmet") and is furnished solely for executing and maintaining the specific project. Re-use of the document for any other project or purpose is prohibited. The document or the information shall not be reproduced, copied or disclosed to any third party without the prior written consent of Valmet. By accessing this document, you accept these terms of use.				
Title 50175-HMP-80-16C1B						
Status CERTIFIED		Document ID				Sheet 1 / 1
Security Classification Internal						Revision 0

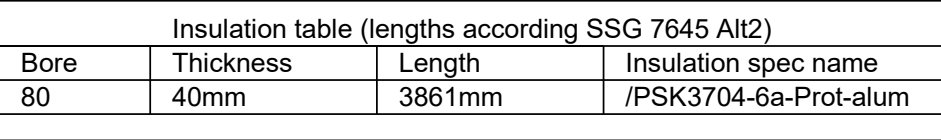

Welding factor	Acc. to pipe class
Efficiency of long weld	Acc. to pipe class
NDT circ. weld %	-
NDT long weld %	-
Welding list see doc.	-