


	A
	B
	C
←	D
	E

[1] [2] [3]

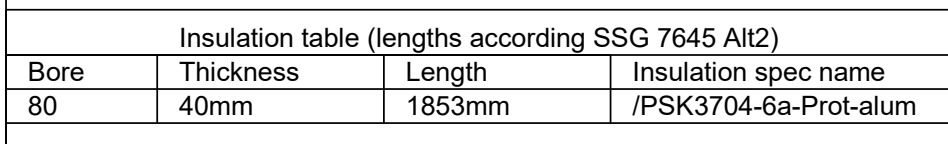

		Hazardous CLP content		Legal protection must be secured by customer.						
				Rev/ Revision Note		Created by		Checked by	Approved by	Date
Directive	2014/68/EU	Pipe Class	/I19440-VE16C1C-R00	0		J. Lakka		T. Saarinen	M. Kankkunen	5/5/2026
Design press. (min)	-1bar	PED Category	I	Site Tervasaari, Valkeakoski		Equipment Type Höyry- ja lauhdejärjestelmä				Equipment ID
Design temp. (min)	-	Media		Project Key TERFMS_N52654		Project Name Ter PM 5 Safe Future		Project Number N52654		Work
Max. allow. press. (PS)	-	Standard		Projection Method Welding Symbols ISO 2553		General Tolerances ISO 13 920-BF ISO 2768-mK-E ISO 2768-mK-E ISO 2768-mK-E		Scale -	Size A1	Weight -
Operating press.	5.9bar	P&ID	RAUF00303	 This document is the exclusive intellectual property of Valmet Corporation and/or its subsidiaries (collectively and individually "Valmet") and is furnished solely for executing and maintaining the specific project. Re-use of the document for any other project or purpose is prohibited. The document or the information shall not be reproduced, copied or disclosed to any third party without the prior written consent of Valmet. By accessing this document, you accept these terms of use.						
Operating temp.	181degC	Design press.	620bar	Title 50178-HMP-80-16C1B						
PED Module	-	Design temp.	220degC	Title 50178-HMP-80-16C1B						
PED Group	-	Test press.	-							
Wind loads	-	Pipe list doc. ID	RAUAF04300	Status CERTIFIED		Document ID				Sheet 1 / 1
External loads	-	Valve list doc. ID	RAUAF04301	Security Classification Internal						Revision 0

For installation tolerances dimensions to be checked by pipe contractor at site
Degree of prefabrication to be decided by contractor.