


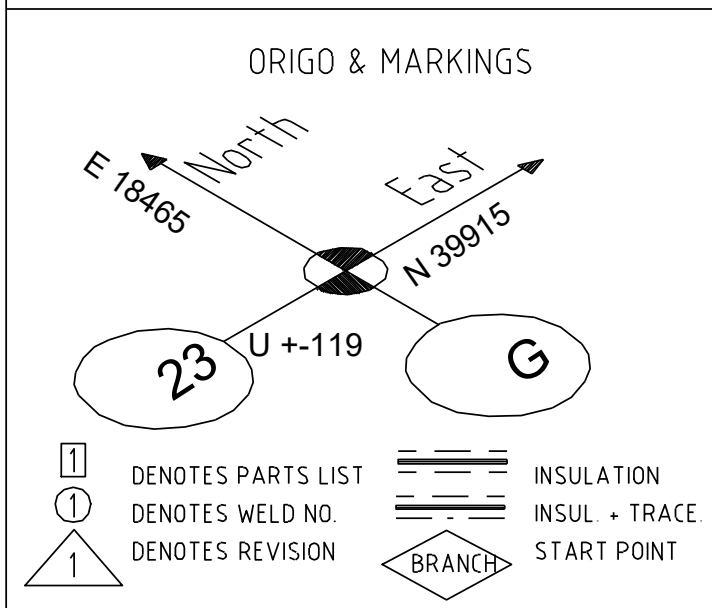

Insulation table (lengths according SSG 7645 Alt2)			
Bore	Thickness	Length	Insulation spec name
150	60mm	7568mm	/PSK3704-6a-Prot-alum
15	30mm	267mm	/PSK3704-6a-Prot-alum

Welding factor	Acc. to pipe class
Efficiency of long. weld	Acc. to pipe class
NDT circ. weld %	-
NDT long. weld %	-
Welding list see doc.	-

		Hazardous CLP content		Rev. Revision Note		Created by		Checked by		Approved by		Date	
Directive	2014/68/EU	Pipe Class	/119440-VE16C1C-R00	0		J. Lakka		T. Saarinen		M. Kankkunen		5/5/2026	
Design press. (min)	-1bar	PED Category	I	Site Torvasaari, Valkeakoski		Equipment Type Höyry- ja lauhdejärjestelmä						Equipment ID	
Design temp. (min)	-	Media		Project Key TERPM5_N5265A		Project Name Ter PM 5 Safe Future		Project Number N5265A				Work	
Max. allow. press. (PS)	-	Standard		Projection Method ☞ ⊕ ISO 2553		General Tolerances ISO 13 920-BF ISO 2768-mK-E ISO 2768-mK-E ISO 2768-mK-E		Welding Symbols		Scale -		Size A1 Weight -	
Operating press.	5.7bar	P&ID	RAUF00303	 This document is the exclusive intellectual property of Valmet Corporation and/or its subsidiaries (collectively and individually "Valmet") and is furnished solely for executing and maintaining the specific project. Re-use of the document for any other project or purpose is prohibited. The document or the information shall not be reproduced, copied or disclosed to any third party without the prior written consent of Valmet. By accessing this document, you accept these terms of use.									
Operating temp.	164degC	Design press.	6bar	Title 50208-VLA-150-16C1B									
PED Module	-	Design temp.	220degC										
PED Group	-	Test press.	-										
Wind loads	-	Pipe list doc. ID	RAUAF04300	Status CERTIFIED		Document ID							Sheet 1 / 1
External loads	-	Valve list doc. ID	RAUAF04301	Security Classification Internal									Revision 0

For installation tolerances dimensions to be checked by pipe contractor at site
Degree of prefabrication to be decided by contractor.