


Bore	Thickness	Length	Insulation spec name
40	40mm	90mm	/PSK3704-6a-Prot-alum
25	30mm	2258mm	/PSK3704-6a-Prot-alum

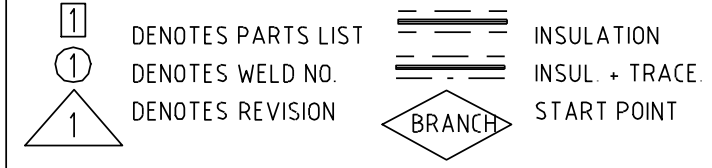

NO	PART DESCRIPTION	DN (MM)	PIPE SPEC	QUANTITY
7	Gasket - EN 1514-1 - type IBC - OD48.3/DN40 - 1.5mm Thk - PN40 Fiber	40	119440-VE16H1A-R00	1
8	Gasket - EN 1514-1 - type IBC - OD33.7/DN25 - 1.5mm Thk - PN40 Fiber	25	119440-VE16H1A-R00	2
9	65 mm Bolt EN ISO 4014 25CrMo4, EN 10269, mat cert. 3.1, HDG	16		4
10	Hexagon nut EN ISO 4032 25CrMo4, EN 10269, mat cert. 3.1, HDG	16		4
11	Washer EN ISO 7089 Grade A - S235JR EN10025-2 - HDG	16		8
12	55 mm Bolt EN ISO 4014 25CrMo4, EN 10269, mat cert. 3.1, HDG	12		8
13	Hexagon nut EN ISO 4032 25CrMo4, EN 10269, mat cert. 3.1, HDG	12		8
14	Washer EN ISO 7089 Grade A - S235JR EN10025-2 - HDG	12		16
15	KPK BASIC BALL VALVE FLANGED PN16 RF WI HAND LEVER 5-0377	25	KBE/ALV01	1
	<u>SUPPORTS</u>			
16	SLIDE SUPPORT PSK 7303 TYPE 1, LOW See supportlist	25	VOFSUPP-PRIM-PSK-AT TA	1

[1] [2]

Directive	2014/68/EU	Pipe Class	/119440-VE16H1A-R00	0			J. Lakka	T. Saarinen	M. Kankkunen	5/5/2026
Design press. (min)	-1bar	PED Category	SEP	Site	Tervasaari, Valkoasoski		Equipment Type		Equipment ID	
Design temp. (min)	-	Media		Project Key	TERMS_N52654 Ter PM & Safe Future		Project Number		Work	
Max. allow. press. (PS)	-	Standard		Projection Method	Welding Symbols ISO 5553		General Tolerances ISO 13 920-BF		Scale Size Weight	
Operating press.	3.5bar	P&ID	RAU8F00303	 This document is the exclusive intellectual property of Valmet Corporation and/or its subsidiaries (collectively and individually "Valmet") and is furnished solely for executing and maintaining the specific project. Re-use of the document for any other project or purpose is prohibited. The document or the information shall not be reproduced, copied or disclosed to any third party without the prior written consent of Valmet. By accessing this document, you accept these terms of use.						
Operating temp.	156degC	Design press.	6bar	Title						
PED Module	-	Design temp.	220degC	50219-VLA-25-16H1A						
PED Group	-	Test press.	-							
Wind loads	-	Pipe list doc. ID	RAUAF04300	Status	CERTIFIED		Document ID		Sheet 1 / 1	
External loads	-	Valve list doc. ID	RAUAF04301	Security Classification	Internal				Revision 0	