



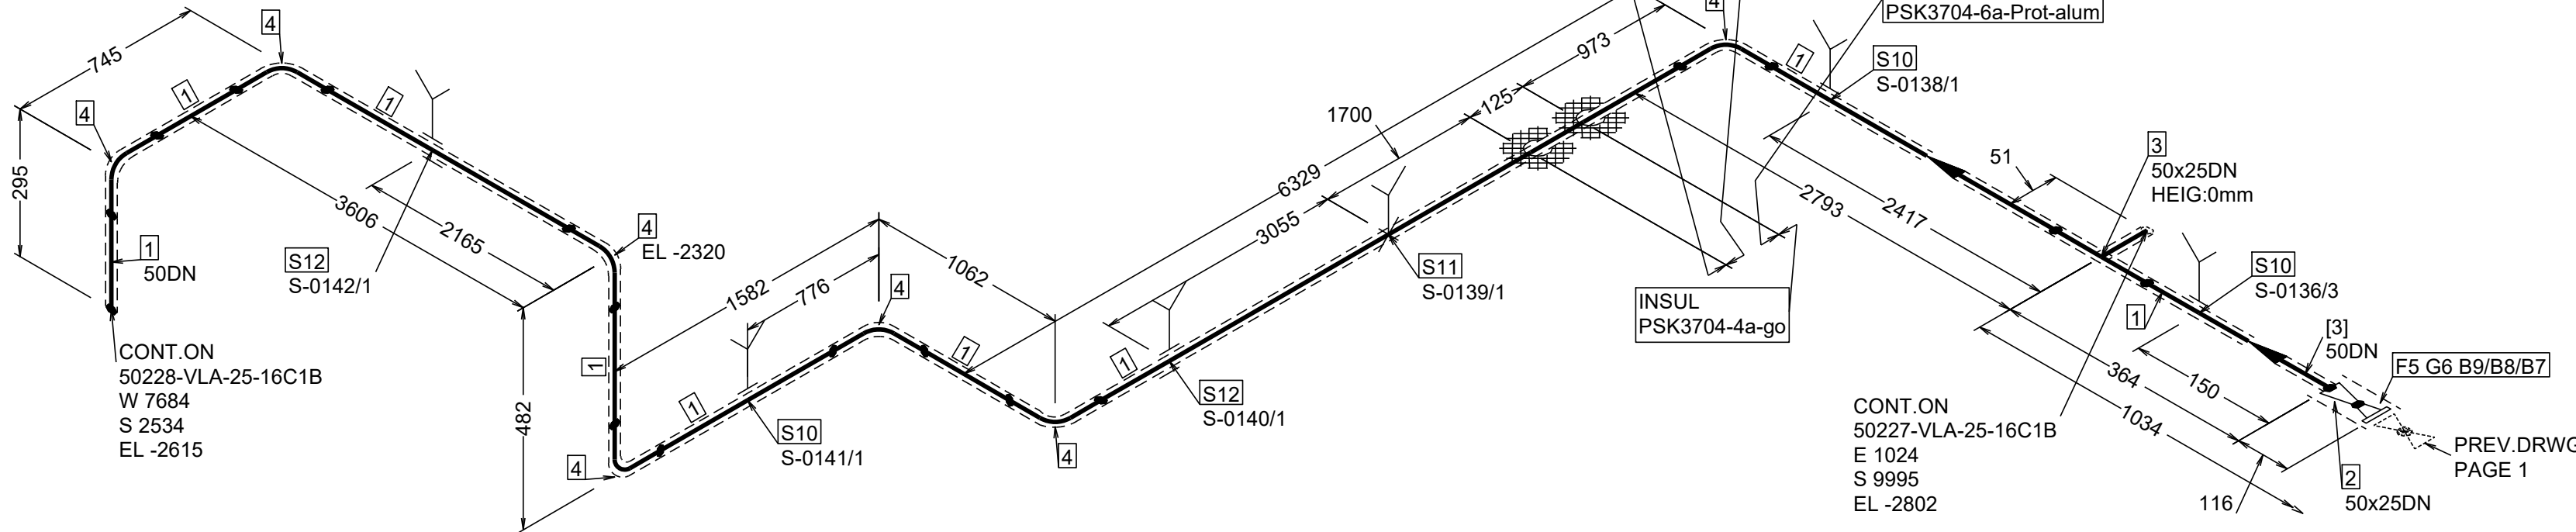

		Hazardous CLP content		Rev/ Revision Note		Created by		Checked by		Approved by		Date		
Directive	2014/68/EU	Pipe Class	/I19440-VE16C1C-R00	0		J. Lakka		T. Saarinen		M. Kankkunen		5/5/2026		
Design press. (min)	-1bar	PED Category	I/ SEP	Site Tervasaari, Valkeakoski		Equipment Type Hyöry- ja lauhdejärjestelmä						Equipment ID		
Design temp. (min)	-	Media		Project Name TERPM5_N5265A Ter PM 5 Safe Future		Project Number N5265A						Work		
Max. allow. press. (PS)	-	Standard		Projection Method  ISO 2553		General Tolerances ISO 13 920-BF		ISO 2768-mK-E		ISO 2768-mK-E		Scale A1		
Operating press.	5.9bar	P&ID	RAU8F00303	 This document is the exclusive intellectual property of Valmet Corporation and/or its subsidiaries (collectively and individually "Valmet") and is furnished solely for executing and maintaining the specific project. Re-use of the document for any other project or purpose is prohibited. The document or the information shall not be reproduced, copied or disclosed to any third party without the prior written consent of Valmet. By accessing this document, you accept these terms of use.										
Operating temp.	181degC	Design press.	6bar	Title 50230-VLA-25-16C1B										
PED Module	-	Design temp.	220degC											
PED Group	-	Test press.	-											
Wind loads	-	Pipe list doc. ID	RAUAF04300	Status CERTIFIED		Document ID						Sheet 2 / 2		
External loads	-	Valve list doc. ID	RAUAF04301	Security Classification Internal								Revision 0		

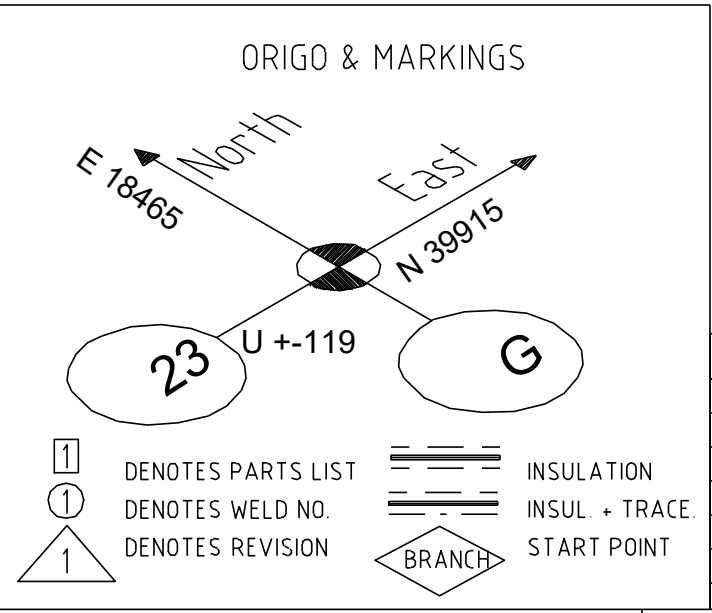

Bore	Thickness	Length	Insulation spec name
150	120mm	522mm	/PSK3704-4a-good
25	80mm	6466mm	/PSK3704-4a-good
50	80mm	158mm	/PSK3704-4a-good
50	100mm	17198mm	/PSK3704-4a-good
50	40mm	125mm	/PSK3704-6a-Prot-alum