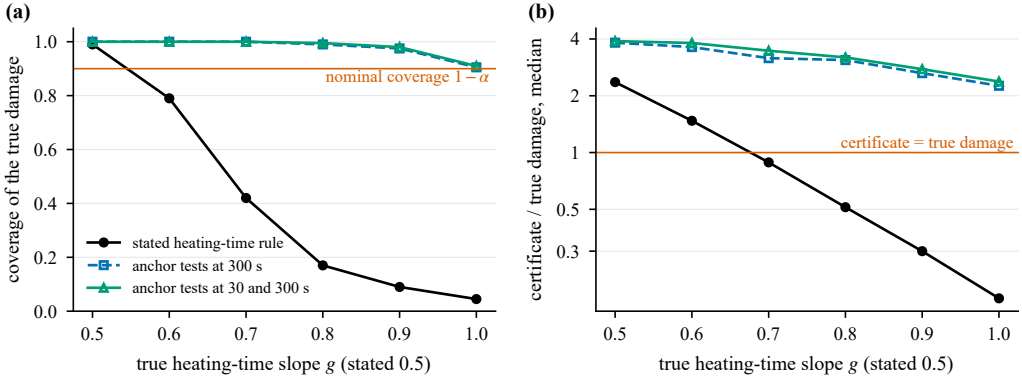
(a)
coverage of the true damage
1.0
0.8
0.6
0.4
0.2
0.0
nominal coverage $1-\alpha$
stated heating-time rule
anchor tests at 300 s
anchor tests at 30 and 300 s
0.5
0.6
0.7
0.8
0.9
1.0
true heating-time slope g (stated 0.5)
(b)
certificate / true damage, median
4
2
1
0.5
0.3
certificate = true damage
0.5
0.6
0.7
0.8
0.9
1.0
true heating-time slope g (stated 0.5)