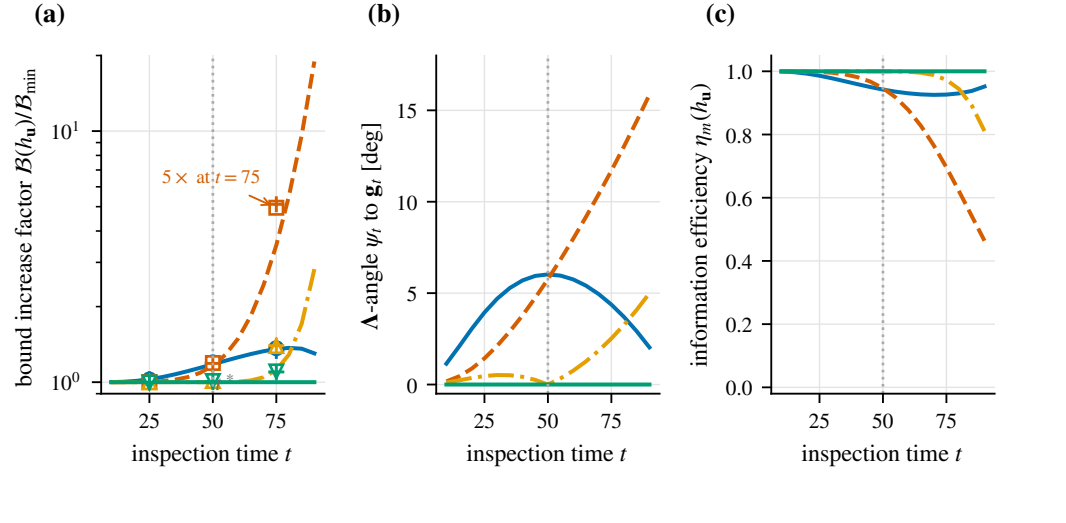
(a)
(b)
(c)
bound increase factor $\mathcal{B}(h_{\mathbf{u}})/\mathcal{B}_{\min}$
10^1
10^0
$5\times$ at $t = 75$
25
50
75
inspection time t
Λ-angle ψ_t to $\mathbf{g}_t$ [deg]
15
10
5
0
25
50
75
inspection time t
information efficiency $\eta_m(h_{\mathbf{u}})$
1.0
0.8
0.6
0.4
0.2
0.0
25
50
75
inspection time t
level only $\mathbf{u} = (1, 0)$
velocity only $\mathbf{u} = (0, 1)$
static, aligned at $t^* = 50$
stage-adaptive $\mathbf{u}_t = \mathbf{g}_t$
theory, fixed operating point
theory, unit-specific gradient
Monte Carlo, exact target