
EVIY)

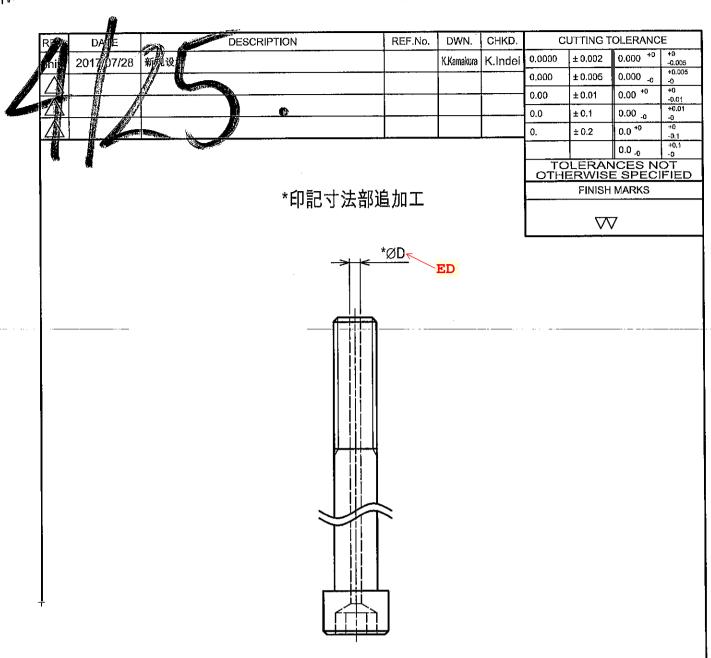

| 追加工前 | | D | QTY. | USE | S-No. | |
|--------|-------------|------|------|-------|---------|--|
| MISUMI | CB12-100 39 | Ø3 | 3 | D2-4 | R105601 | |
| MISUMI | CB10-140 | Ø2 | 1 | D5 | R109121 | |
| MISUMI | CB8-120 | Ø2 | 1 | D1 | R109123 | |
| MISUMI | CB8-85 | Ø2 | 1 | TRIM | R109124 | |
| MISUMI | CB6-15 | Ø1.5 | 3 | D2-D4 | R109125 | |

(163)

| <u>, </u> | | | | | | |
|---|---------------|------------|--------------|-------|------------|--|
| | | 2017/07/27 | 1:1 | | R105601 | |
| | MATERIAL | DATE | SCALE | | DWG.No. | |
| | HRC 0 °~ 0 ° | | 网品部 | | 螺栓 螺栓 | |
| - | | | 部品図 | | 螺拴 | |
| | QUENCH&TEMPER | SURFACE | 1 | | TMTZ | |
| N.Namakura | | IX.IIIGEI | PART DRAWING | | BOLT | |
| | K Kamakura | K.Indei | r Z | 部品図 | ボルト | |
| [| DSGND. | CHKD. | | TITLE | PARTS NAME | |
| AMENT CONTROL OF THE PROPERTY | | | | | | |

| SNO: R105601 | | | | | | |
|--|--------------------|--|--|--|--|--|
| SỐ PCS TỐI THIỂU/1 LẦN ĐẶT HÀNG: | | | | | | |
| NGƯỜI THIẾT LẬP: 10197 | | | | | | |
| DIỄN GIẢI | THỜI GIAN CHUẨN 1P | | | | | |
| 1.VẬT LIỆU: Xuất hàng K2 Quy cách:CB12-100 | ED:25 | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |