

# F3OF Modelling Results

October 2, 2017

## Contents

<b>1</b>	<b>F3OF System Overview</b>	<b>1</b>
<b>2</b>	<b>HDB</b>	<b>3</b>
2.1	Added Mass . . . . .	3
2.1.1	Surge & Heave . . . . .	3
2.1.2	Pitch for Individual Bodies . . . . .	5
2.2	Damping . . . . .	8
2.2.1	Surge & Heave . . . . .	8
2.2.2	Pitch for Individual Bodies . . . . .	10
<b>3</b>	<b>Decay Tests</b>	<b>13</b>
3.1	Initial Position Calculations . . . . .	13
3.1.1	DT1 . . . . .	13
3.1.2	DT2 . . . . .	14
3.1.3	DT3 . . . . .	15
<b>4</b>	<b>Time Domain Comparison</b>	<b>16</b>
4.1	Decay Tests . . . . .	16

## 1 F3OF System Overview

Key parameters are taken from [?] <sup>1</sup>

---

<sup>1</sup>N.B. Some parameters given in ‘InWave - Validation Manual v1.0.0-beta2’ differ to the paper.

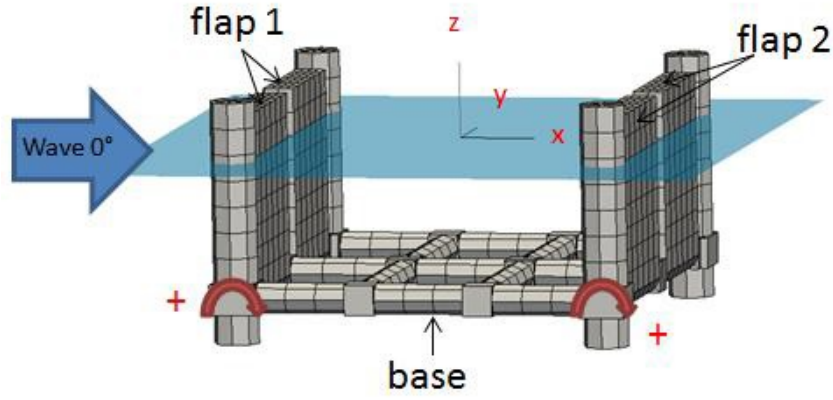


Figure 1: Schematic of the F3OF device.

Table 1: F3OF System - Key Parameters

Parameter	Base	Flap 1	Flap 2
Mass (kg)	1089825	179250	179250
COG - x (m)	0	-12.5	12.5
COG - y (m)	0	0	0
COG - z (m)	-9	-5.5	-5.5
Pitch inertia around body COG (kg.m <sup>2</sup> )	76300000	1300000	1300000
Mooring stiffness (N/m)	100000	n/a	n/a

## 2 HDB

### 2.1 Added Mass

#### 2.1.1 Surge & Heave

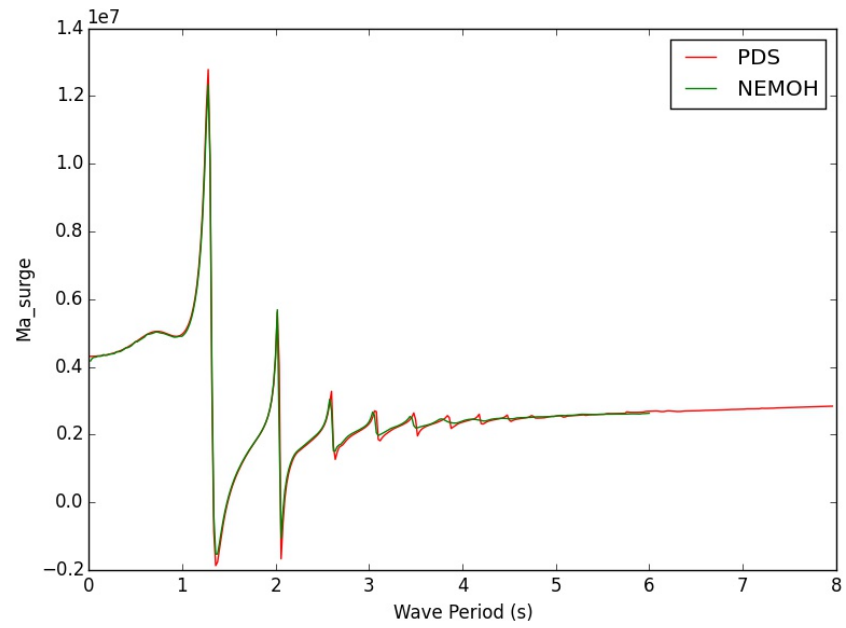


Figure 2: HDB: Surge Comparison.

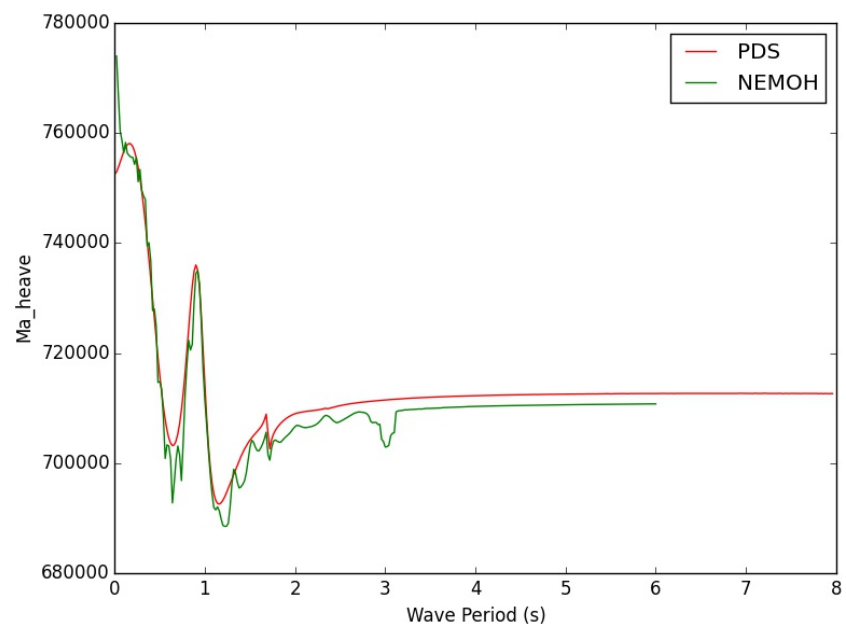


Figure 3: HDB: Heave Comparison.

2.1.2 Pitch for Individual Bodies

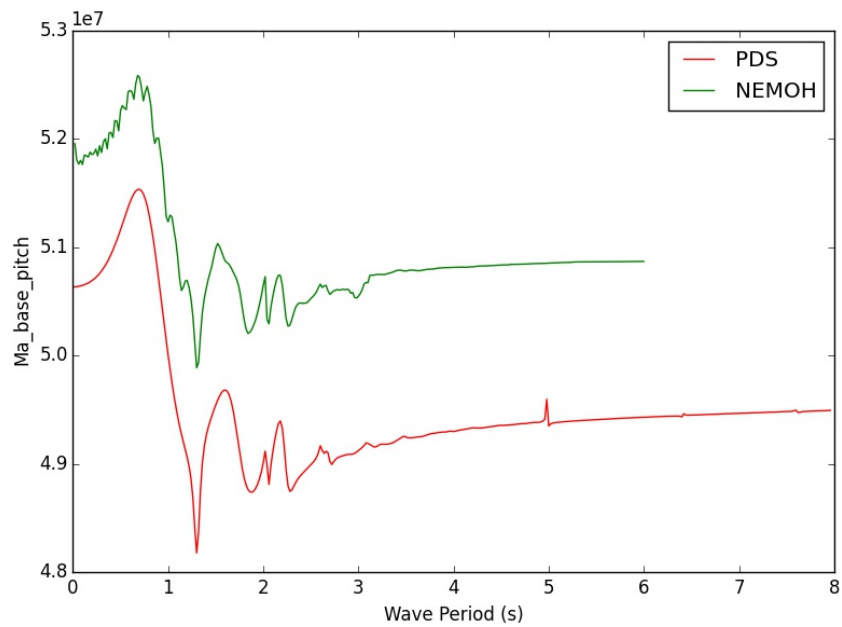


Figure 4: HDB: Base Pitch Comparison.

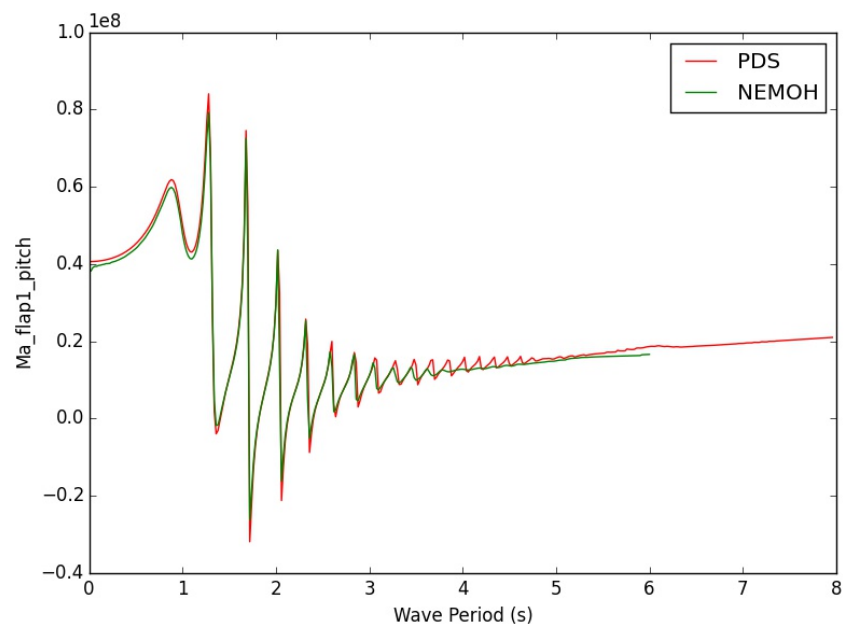


Figure 5: HDB: Flap 1 Pitch Comparison.

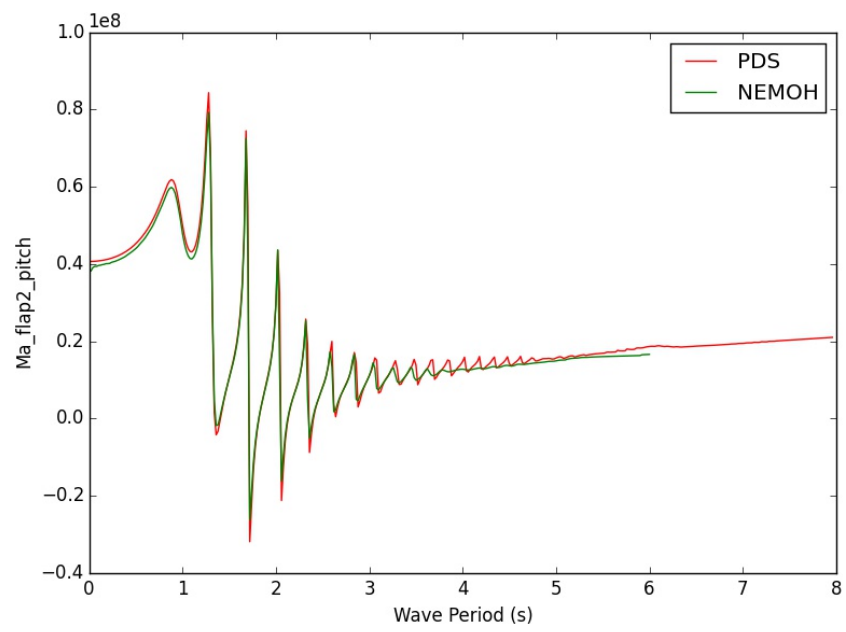


Figure 6: HDB: Flap 2 Pitch Comparison

## 2.2 Damping

### 2.2.1 Surge & Heave

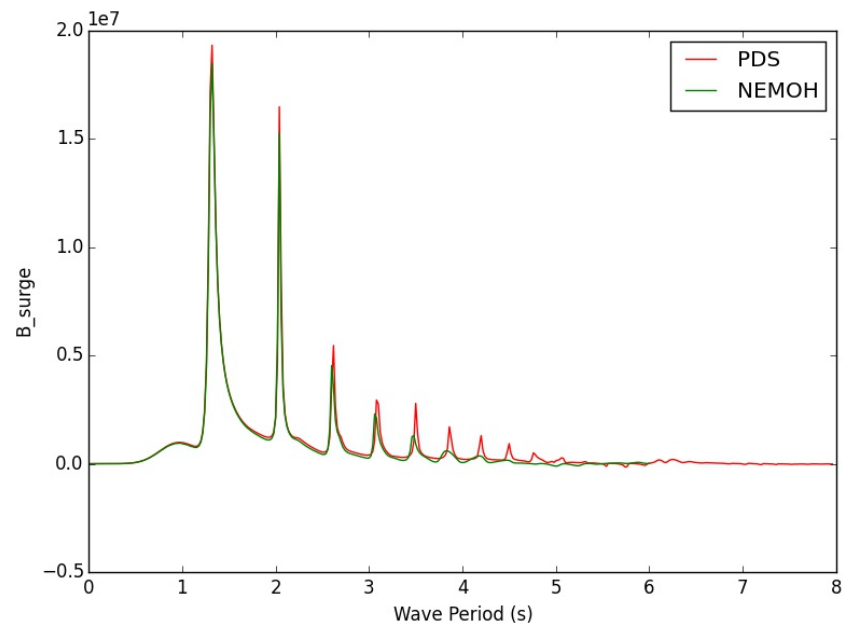


Figure 7: HDB: Surge Comparison.



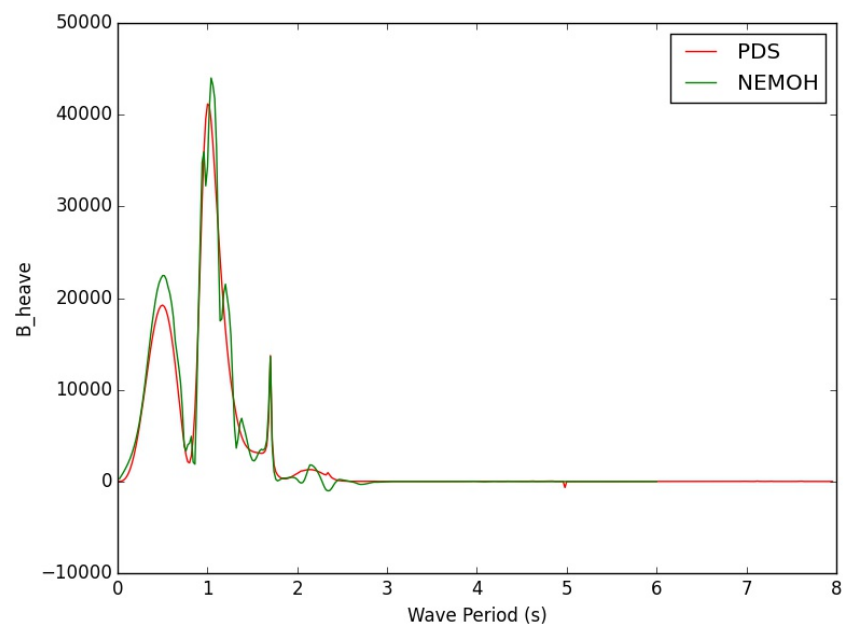


Figure 8: HDB: Heave Comparison.

2.2.2 Pitch for Individual Bodies

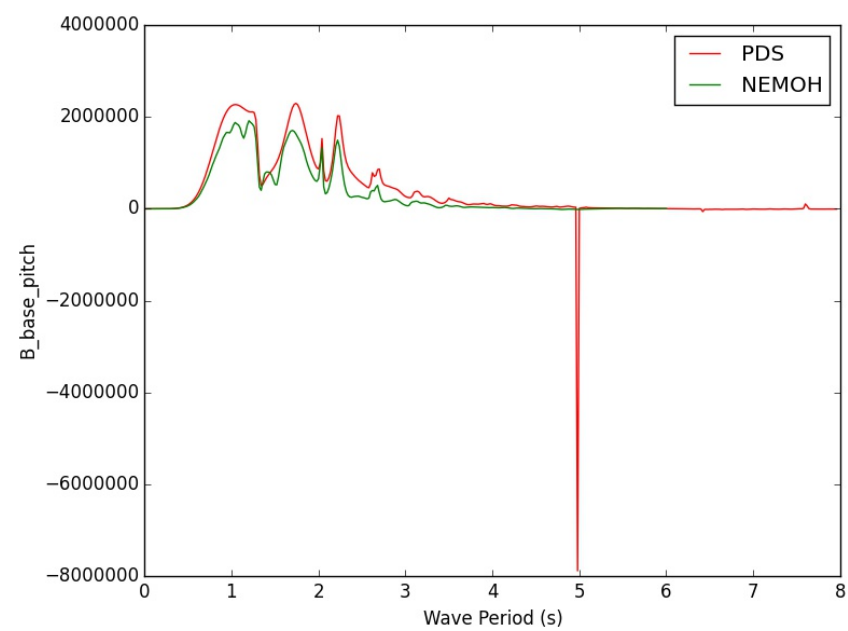


Figure 9: HDB: Base Pitch Comparison.

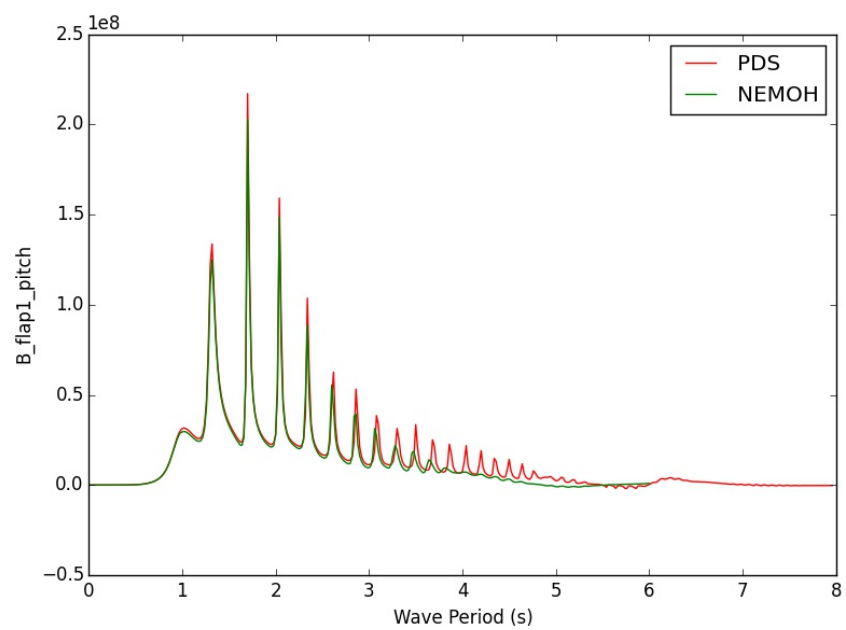


Figure 10: HDB: Flap 1 Pitch Comparison.

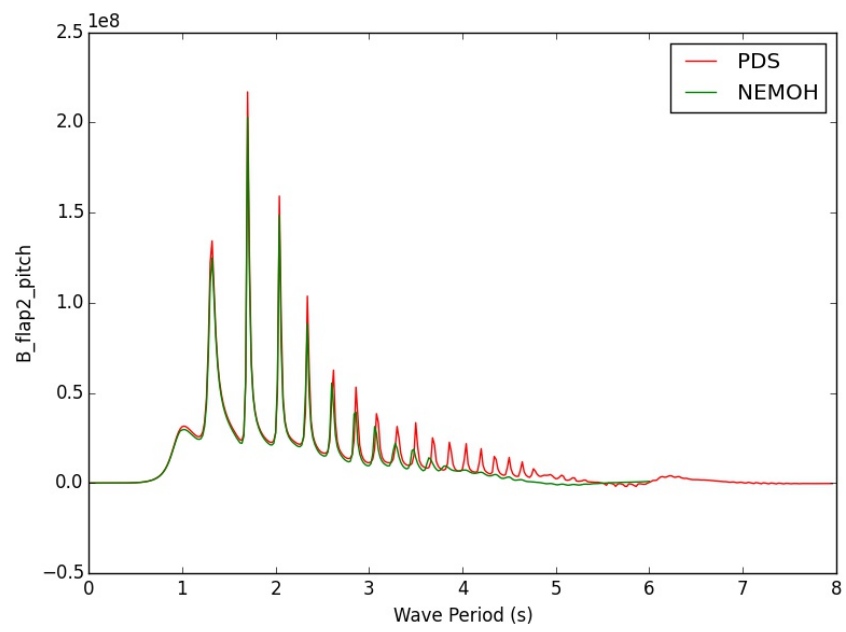


Figure 11: HDB: Flap 2 Pitch Comparison

### 3 Decay Tests

#### 3.1 Initial Position Calculations

##### 3.1.1 DT1

Linear translation:

$$\vec{p}_{new} = \vec{p}_{eq} + \overrightarrow{offset} \quad (1)$$

Where,

$$\overrightarrow{offset} = \begin{bmatrix} 5 \\ 0 \\ 0 \end{bmatrix} m \quad (2)$$

```
('DT1 Base Position : ', [5, 0, -9])  
( 'DT1 Flap 1 Position : ', [-7.5, 0.0, -5.5])  
( 'DT1 Flap 2 Position : ', [17.5, 0.0, -5.5])
```

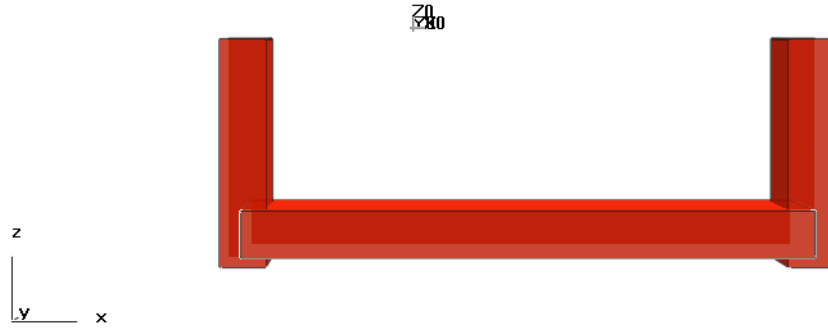


Figure 12: DT1: Initial position.

### 3.1.2 DT2

Rotate whole system by 10 degrees (about the y axis of the base).

```
('DT2 Base Position : ', [0.0, 0.0, -9.0])  
( 'DT2 Flap 1 Position : ', [-11.702, 0.0, -3.383])  
( 'DT2 Flap 2 Position : ', [12.918, 0.0, -7.724])
```

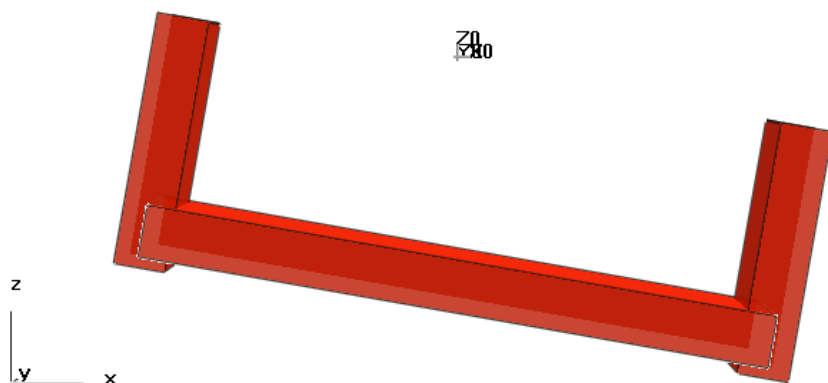


Figure 13: DT2: Initial position.

### 3.1.3 DT3

Rotate flap 1 by 10 degrees.

```
('DT2 Base Position : ', [0, 0, -9])  
( 'DT2 Flap 1 Position : ', [-11.892, 0.0, -5.553])  
( 'DT2 Flap 2 Position : ', [12.5, 0.0, -5.5])
```

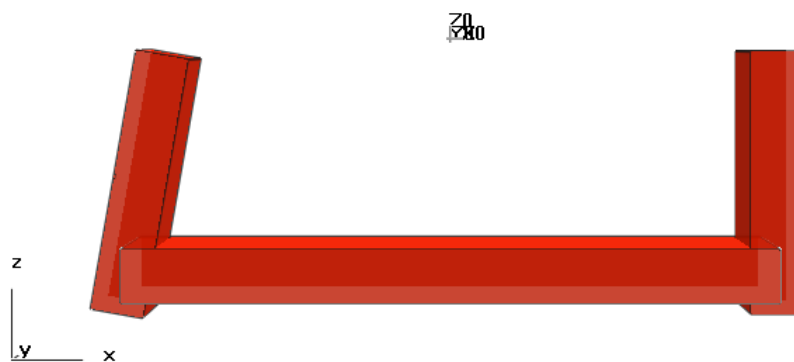


Figure 14: DT2: Initial position.

## 4 Time Domain Comparison

### 4.1 Decay Tests

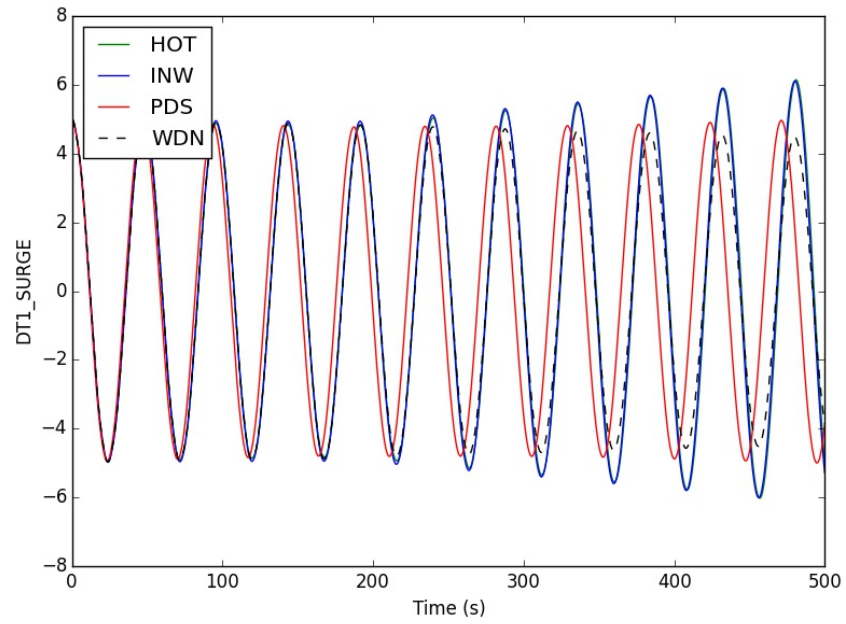


Figure 15: Decay Tests: DT1 Surge Comparison.



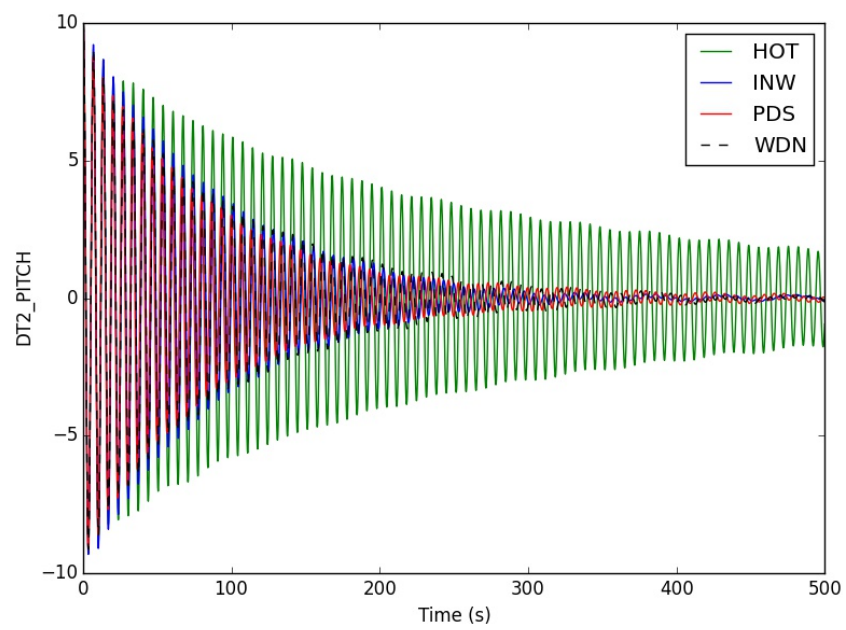


Figure 16: Decay Tests: DT2 Pitch Comparison.

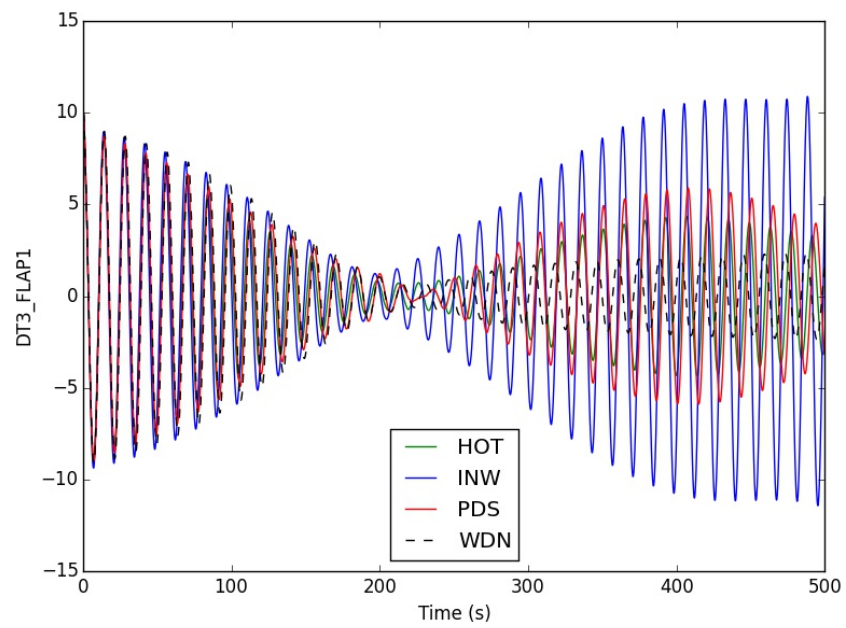


Figure 17: Decay Tests: DT3 Flap 1 Pitch Comparison.

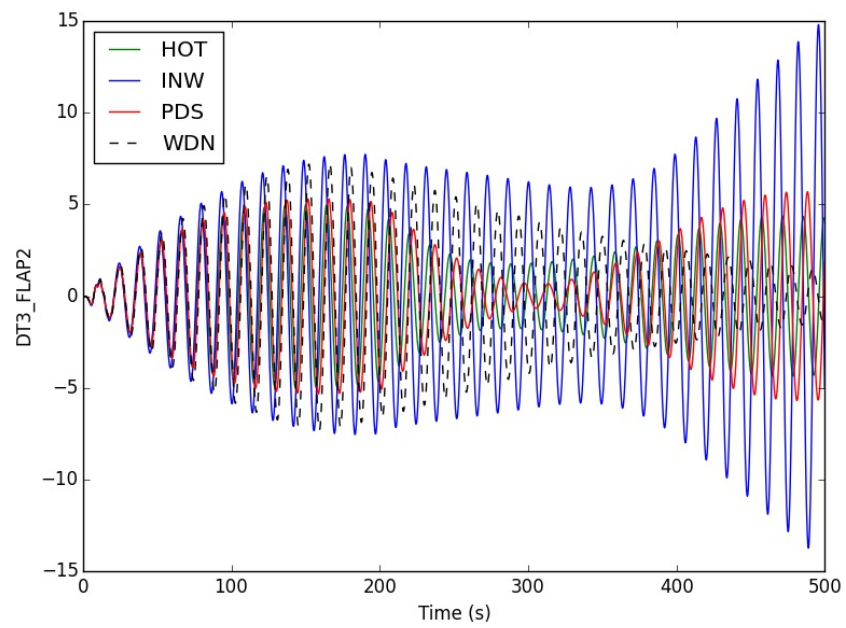


Figure 18: Decay Tests: DT3 Flap 2 Pitch Comparison.