


Mechanical:


REV.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		2010/07/15	

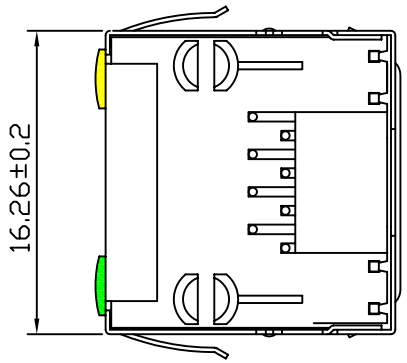

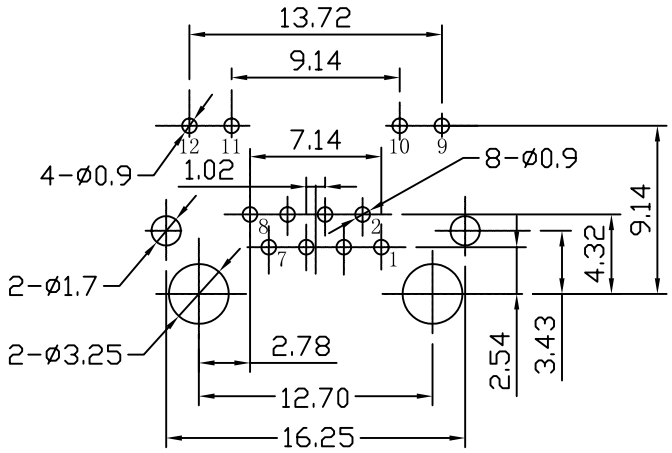

PC Board Layout(TOP VIEW)

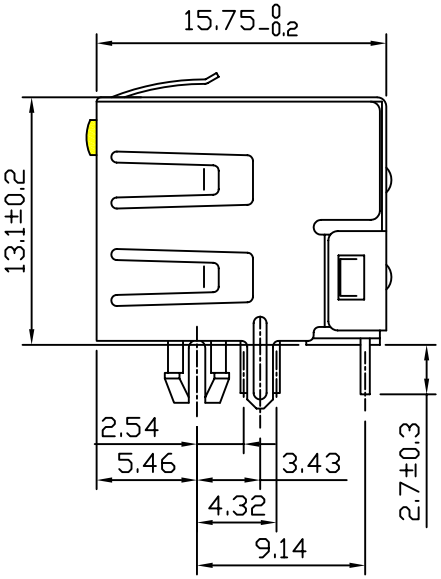

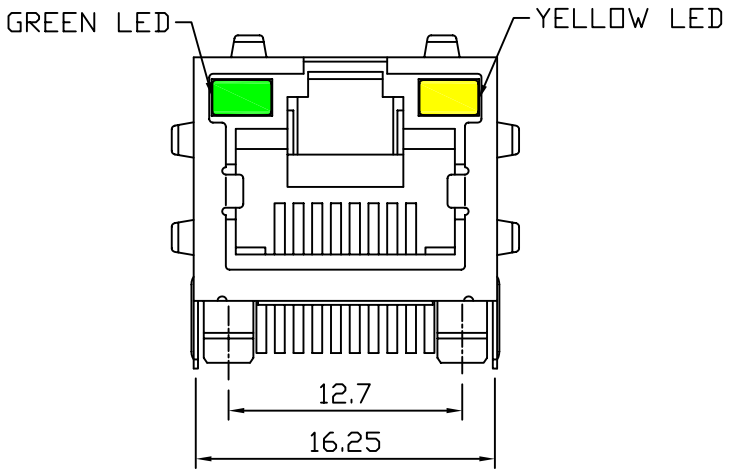


NOTES:
PCB JACK Specification
1. Insulation Resistance:500MΩMIN @ 500 VDC
2. Withstanding Voltage:AC1000V 50Hz or 60Hz 1min.
3. Durability:600 Mating Circles MIN.
4. Gold Plating:
(Gold Flash;1.5;3;6;15;30;50)u″ inch


ENVIRONMENTAL1
1. Storage Temperature: -40℃ To +85℃
2. Opertion Temperature: -40℃ To +85℃
3. Wave Soldering Temperature:
255℃～265℃(5～10Seconds)
4. RoHs Compliant.

RoHS 2002/95/EC

GREEN/LEFT LED



YELLOW/RIGHT LED



X:X ±0.25	APPD:	LINK-PP INT'L TECHNOLOGY CO., LIMITED	
X:XX ±0.10	CHKD:		
X:XXX ±0.05	DR: TOM	TITLE: RJ45 1×1 CONNECTOR	
ANGLES ±1°	UNIT: mm	PART NO.: LPJE101AHNL	
	SCALE: 2/1	SHEET: 1/1	REV: A	DWG NO.: LP10071505