

Mechanical:

REV.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		17/09/2009	

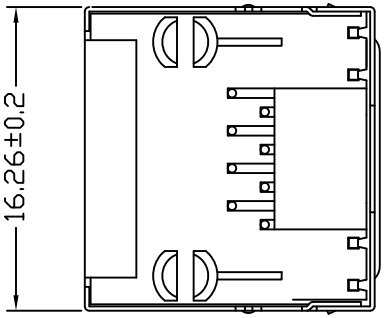

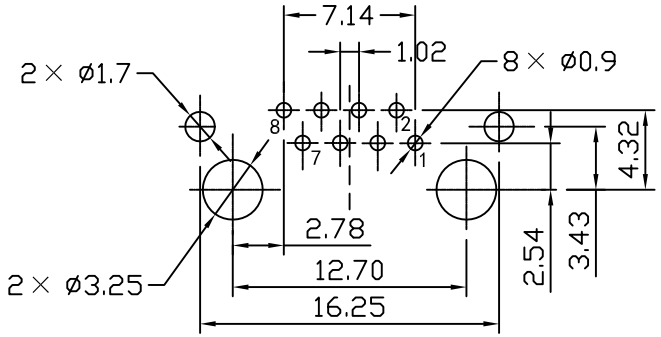

SUGGESTED PCB LAYOUT (TOP VIEW)

NOTES:

Electrical:


1. Voltage rating	:	125 VAC RMS
2. Current Rating	:	1.5 AMP
3. Contact resistance	:	50 mΩ Max
4. Insulation resistance	:	500 MΩ Min @500V DC
5. Dielectric strength	:	1500 VAC RMS 60Hz, 1MIN.


MECHANICAL:

1. Housing & Insert Material	:	PBT UL94V-0.
2. Contact Material	:	Diameter 0.46mm Phosphor Bronze Gold Plating Over Nickel.
3. Shield	:	0.20-0.25mm Thickness Brass With tin Plated
4. Operating Life	:	750 Cycles Min.

ENVIRONMENTAL:

1. Storage	:	-40℃ ～ +85℃
2. Operation	:	-40℃ ～ +85℃.
3. Wave solder temperature	:	265℃MAX, 5 Sec.
4. UL Certification	:	File Number E484635.

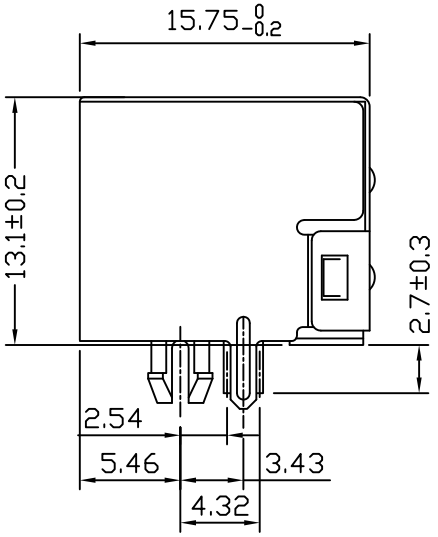

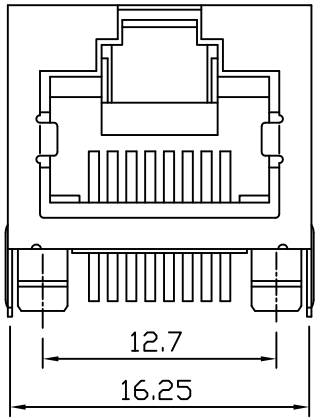

RoHS 2011/65/EU

X:X ±0.30	APPD:	LINK-PP INT'L TECHNOLOGY CO., LIMITED	
X:XX ±0.25	CHKD:		
X:XXX ±0.05	DR: TOM	TITLE: RJ45 1×1 CONNECTOR	
ANGLES ±1°	UNIT: mm	PART NO.: LPJE101DNL	
	SCALE: 2/1	SHEET: 1/1	REV: A	DWG NO.: LP09091712

LINK-PP Website: http://www.link-pp.com Email: info@link-pp.com Tel: +86-0752-3322916 Fax: +86-0752-3161926