



Indoor Car Cover User's Information Manual

CIVIC TYPE R


A Few Words About Safety

Your safety, and the safety of others, is very important. Operating your vehicle's indoor car cover safely is an important responsibility.

To help you make informed decisions about safety, we have provided operating procedures and other information on labels in the vehicle owner's manual, and in this manual. This information alerts you to potential hazards that could hurt you or others.

Of course, it is not practical or possible to warn you about all the hazards associated with operating or maintaining your vehicle. You must use your own good judgment.

You will find this important safety information in a variety of forms. It includes these items:

- **Safety Labels** - on the vehicle.
- **Safety Messages** - preceded by safety alert symbol  and one of three signal words: **DANGER**, **WARNING**, or **CAUTION**.

These signal words mean:

 **DANGER**


You **WILL** be **KILLED** or **SERIOUSLY HURT** if you don't follow instructions.

 **WARNING**

You **CAN** be **KILLED** or **SERIOUSLY HURT** if you don't follow instructions.

 **CAUTION**

You **CAN** be **HURT** if you don't follow instructions.

As you read this manual, you will find information that is preceded by a  **NOTICE** symbol. This information is intended to help you avoid damage to your vehicle, other property, or the environment.

- **Instructions** - how to use this vehicle correctly and safely.


This manual contains important safety information - please read it carefully.

When installing your cover, make sure the mirror pockets on the sides of the cover are pulled over the mirrors before pulling the corners over the bumpers as shown in figure A.

NOTICE

- Once the vehicle has been turned off, allow the vehicle to cool for at least 20 minutes before installing your cover.

FIGURE A

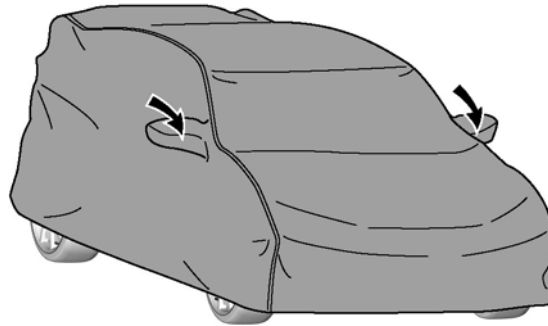


QFD12010T

Installation

Pull back the inner material and install the four J-hooks to the side sill trim as shown in figure B.

FIGURE B

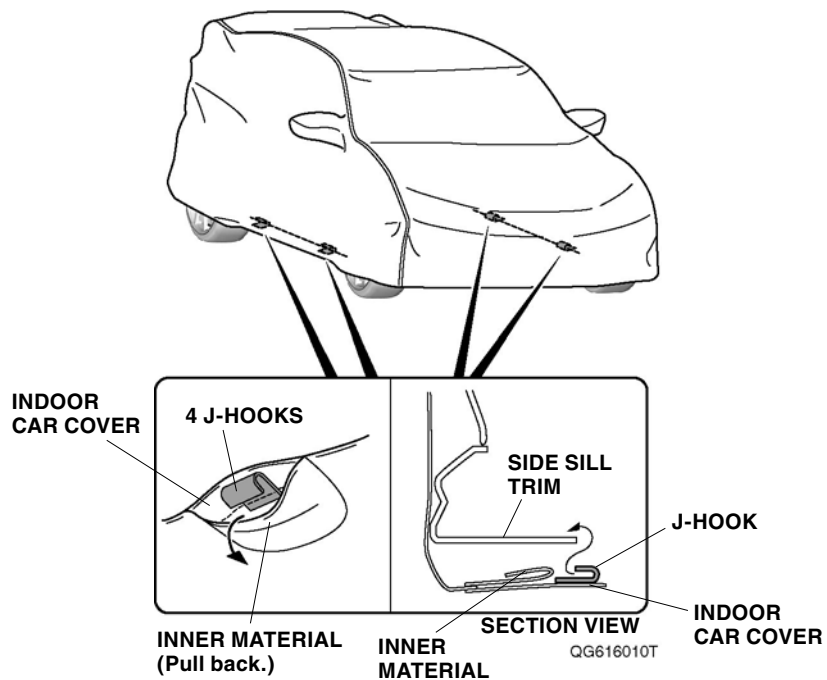


First, release the four corners from under the bumpers. Then fold the cover from the left side of the vehicle to the middle of the vehicle. Make the fold about 2 feet wide as shown in figure C. Make the same fold from the other side of the vehicle to meet the first folded section. Then, roll the cover from the front to back as shown in figure D.

NOTICE


Carefully remove the mirror pockets from the side mirrors. Do not pull or tug on them as this may tear the cover or damage the mirrors.

FIGURE C

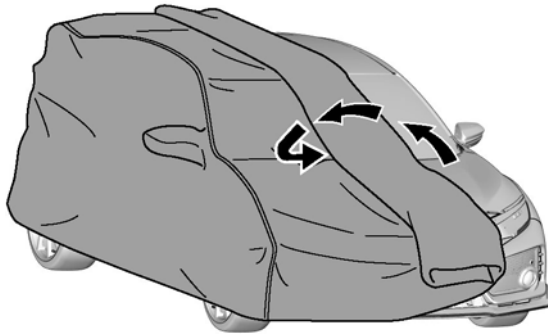

QFD12020T


FIGURE D

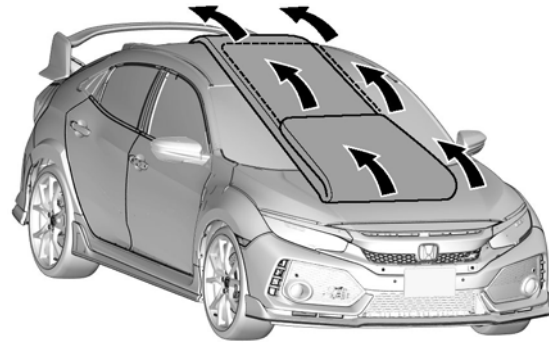

QFD12030T

Storage

Place the folded cover in the storage bag and store it in the luggage area.

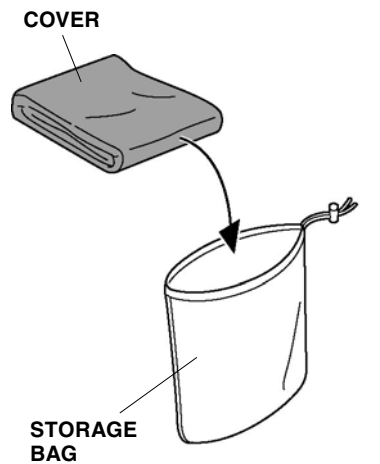

QFD12040T

NOTICE

- Do not machine wash.
- If the cover becomes soiled, spot clean it with an all-purpose cleaner and rinse with water.
- Do not machine dry; air dry only.
- Do not install the cover on a recently painted vehicle. Check with your body shop for the recommended curing time. Premature use of a cover in this situation could result in damage to painted surfaces.
- Do not install the cover on a wet vehicle, especially when the temperature is below freezing.
- Do not use this cover when your vehicle is being towed.
- Do not expose the vehicle to high winds when the cover is installed.

