
Au+Au FXT: 13.5 GeV beam energy | 2020 P24iy | inclusive accepted events

R=0.50-0.51 GeV/c [log]

P=0.687 ± 0.013

χ^2/ndf=1.2

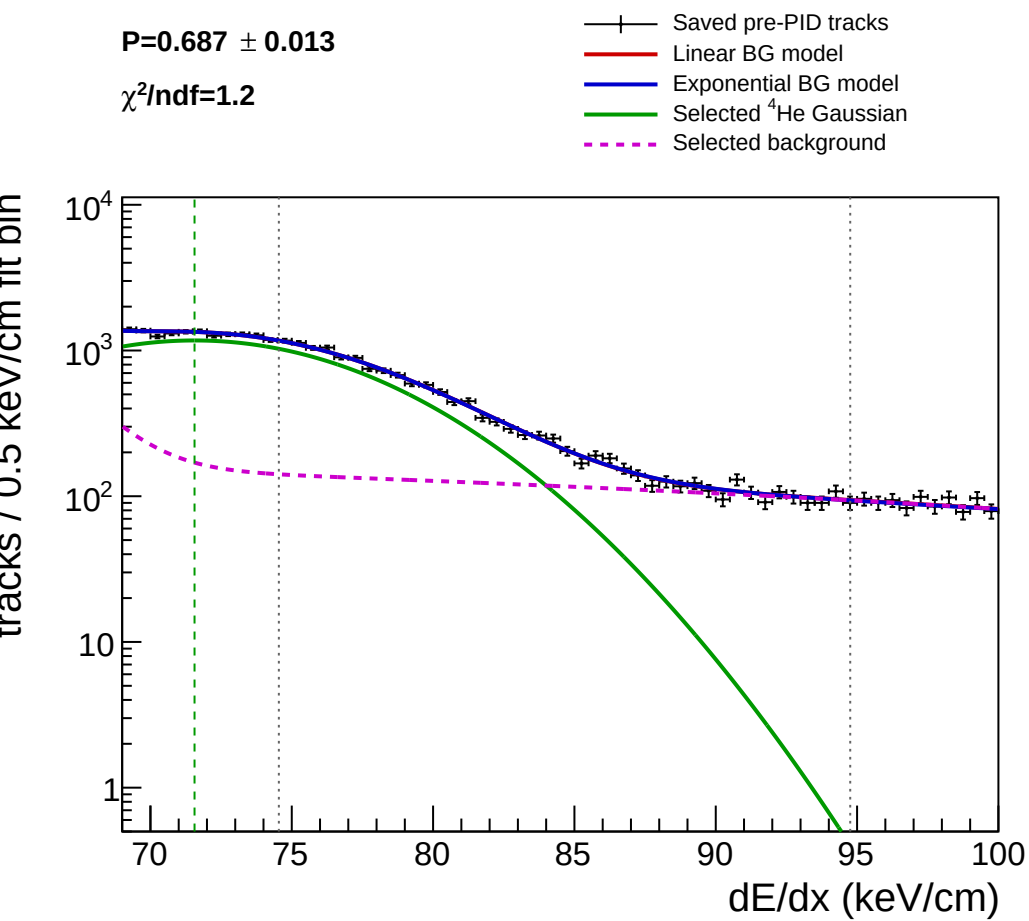


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 13.5 GeV beam energy | 2020 P24iy | inclusive accepted events

R=0.50-0.51 GeV/c [linear]

P=0.687 ± 0.013

χ^2/ndf=1.2

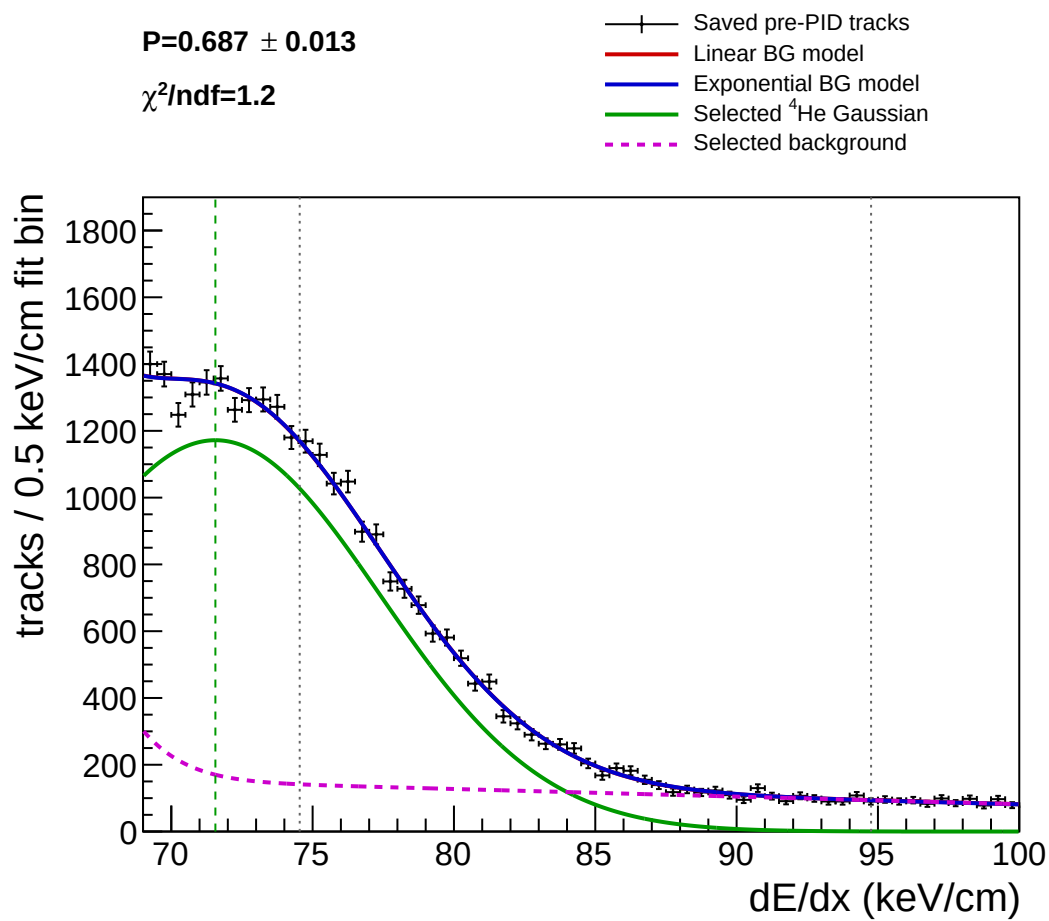


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 13.5 GeV beam energy | 2020 P24iy | inclusive accepted events

R=0.55-0.56 GeV/c [log]

P=0.629 ± 0.031

χ^2/ndf=2.1

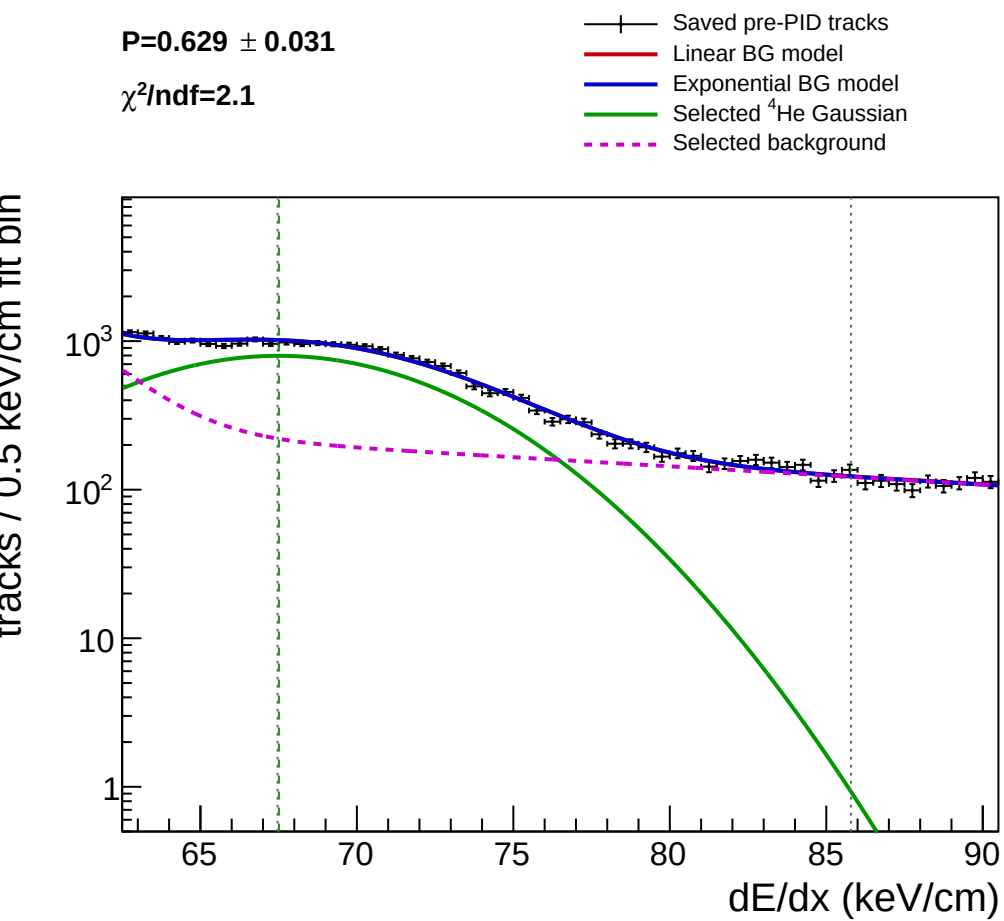


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 13.5 GeV beam energy | 2020 P24iy | inclusive accepted events

R=0.55-0.56 GeV/c [linear]

P=0.629 ± 0.031

χ^2/ndf=2.1

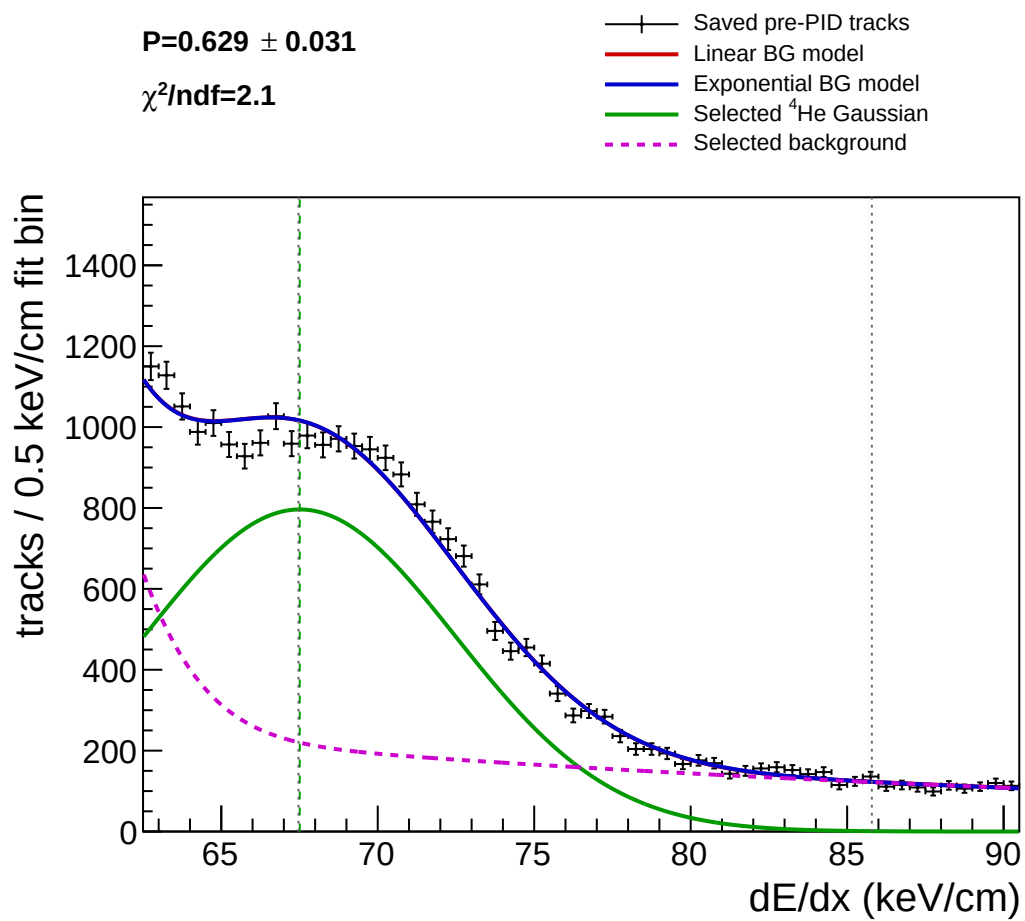


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 13.5 GeV beam energy | 2020 P24iy | inclusive accepted events

R=0.60-0.61 GeV/c [log]

P=0.387 ± 0.012

χ^2/ndf=2.7

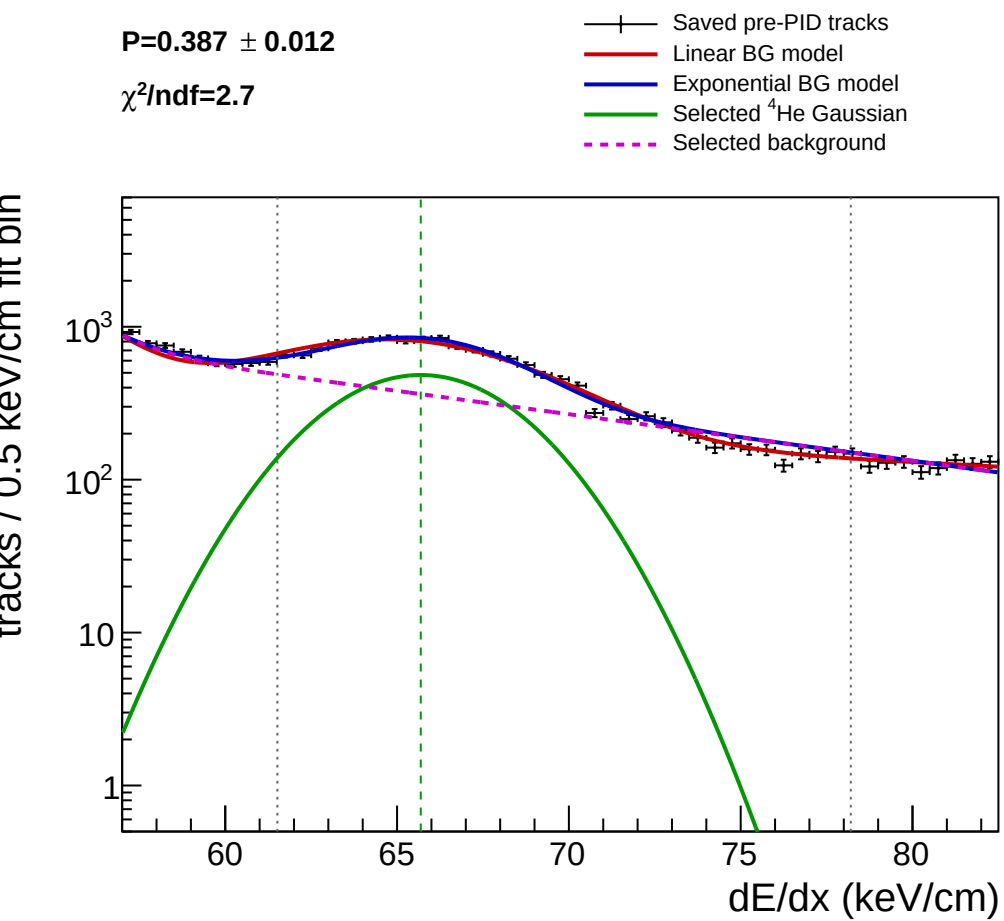


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 13.5 GeV beam energy | 2020 P24iy | inclusive accepted events

R=0.60-0.61 GeV/c [linear]

P=0.387 ± 0.012

χ^2/ndf=2.7

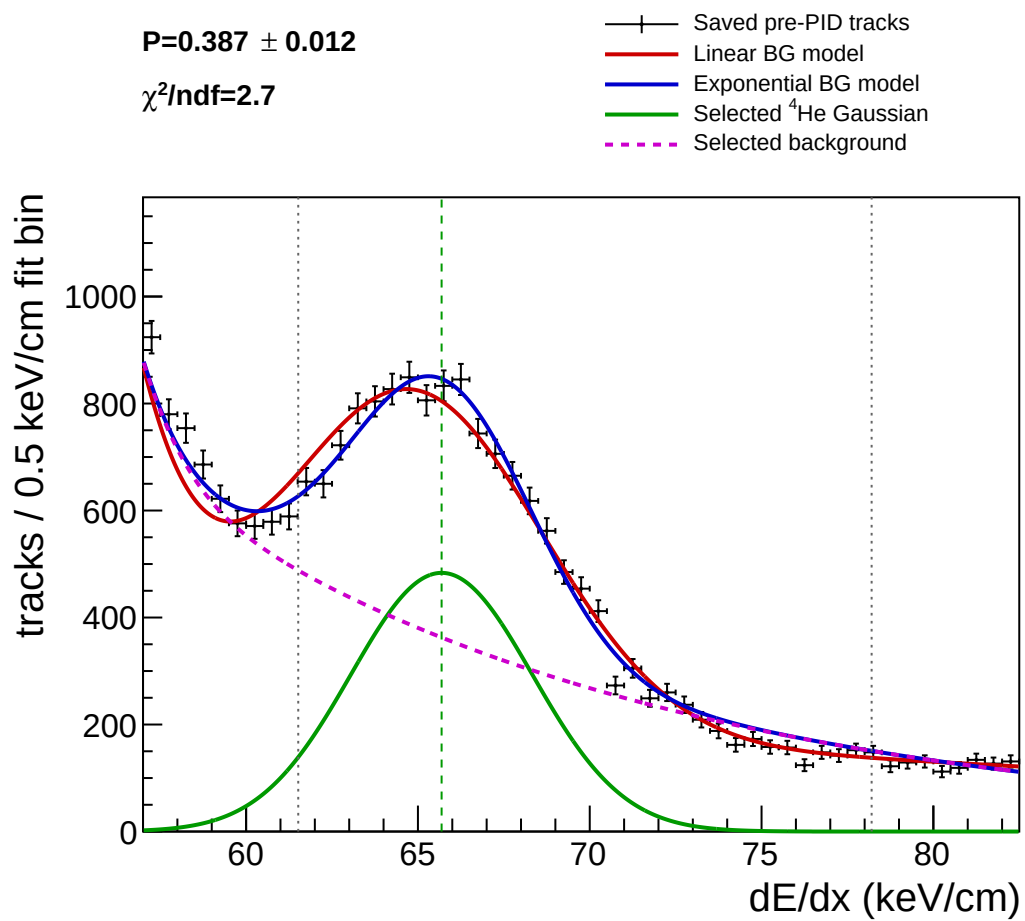


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 13.5 GeV beam energy | 2020 P24iy | inclusive accepted events

R=0.65-0.66 GeV/c [log]

P=0.518 ± 0.013

χ^2/ndf=1.8

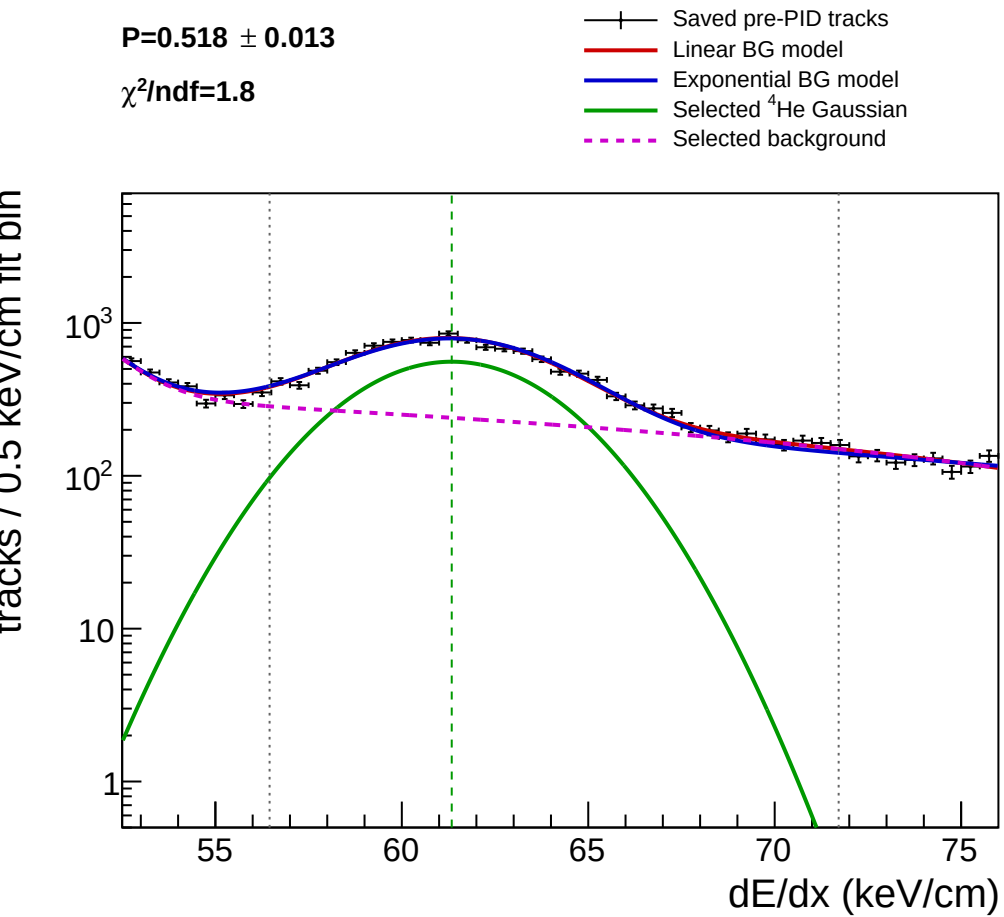


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 13.5 GeV beam energy | 2020 P24iy | inclusive accepted events

R=0.65-0.66 GeV/c [linear]

P=0.518 ± 0.013

χ^2/ndf=1.8

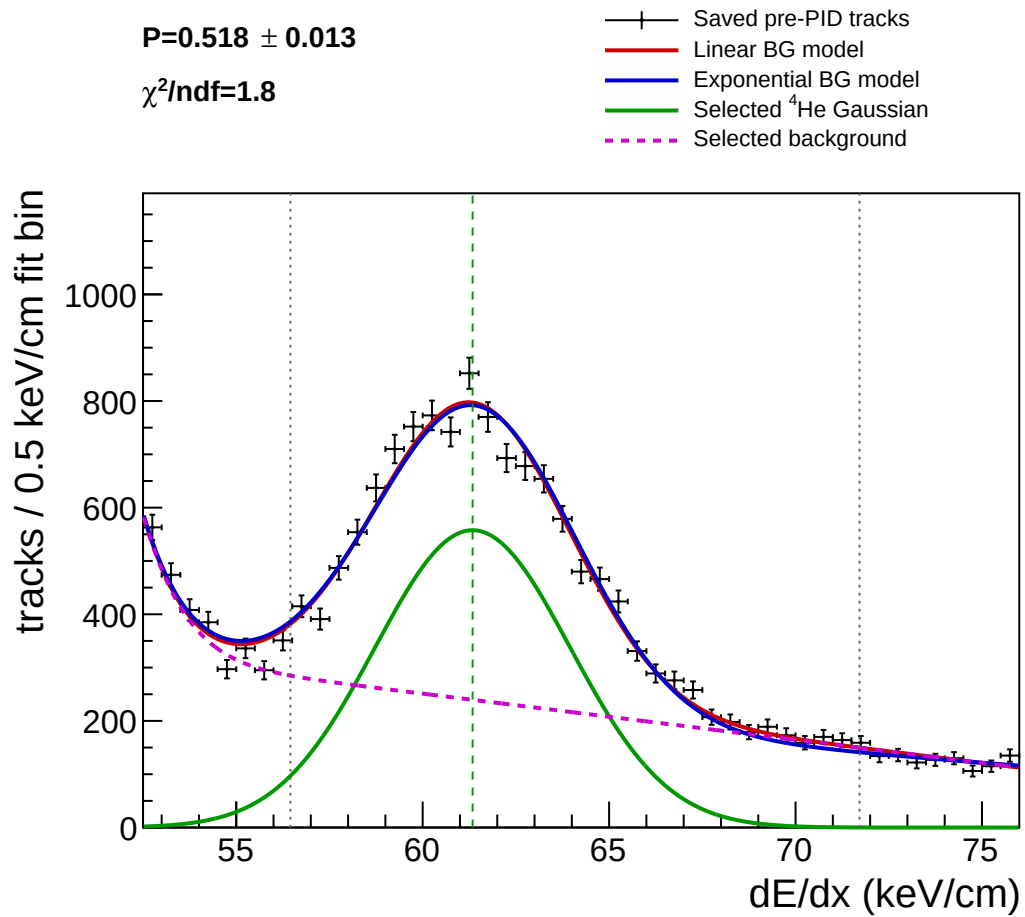


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 13.5 GeV beam energy | 2020 P24iy | inclusive accepted events

R=0.70-0.71 GeV/c [log]

P=0.655 ± 0.012

χ^2/ndf=2.8

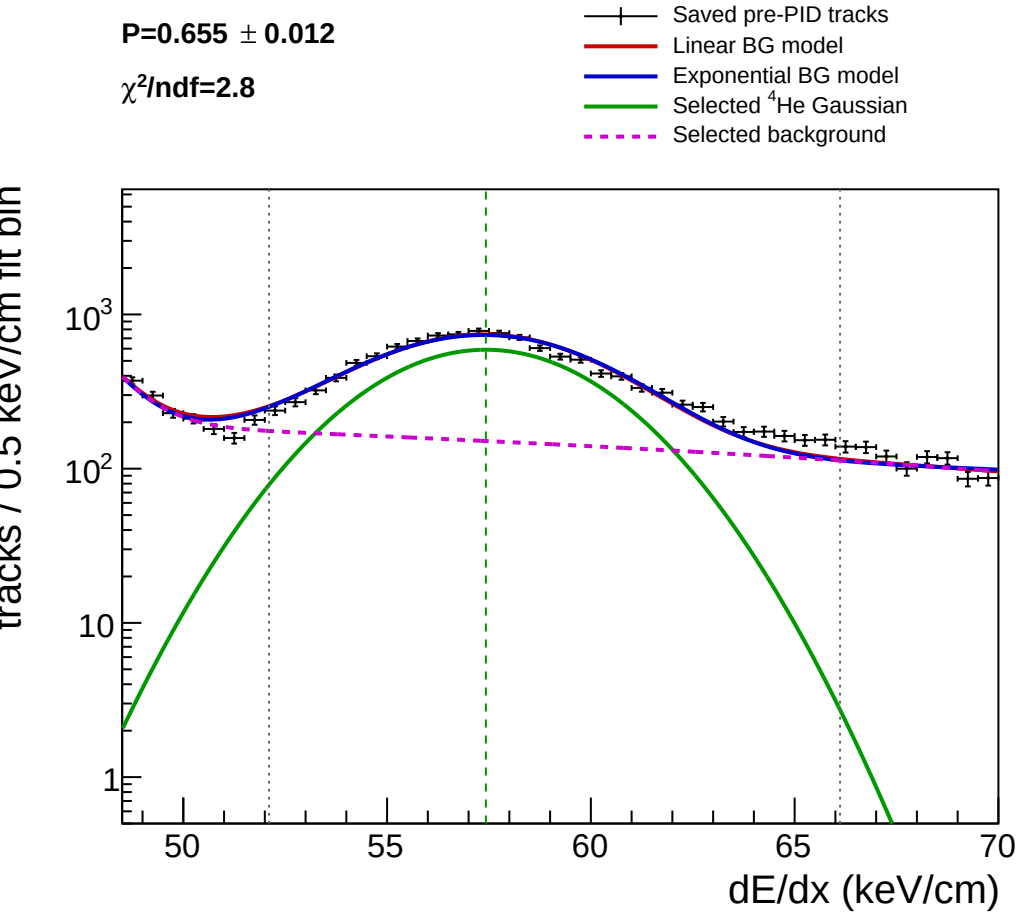


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 13.5 GeV beam energy | 2020 P24iy | inclusive accepted events

R=0.70-0.71 GeV/c [linear]

P=0.655 ± 0.012

χ^2/ndf=2.8

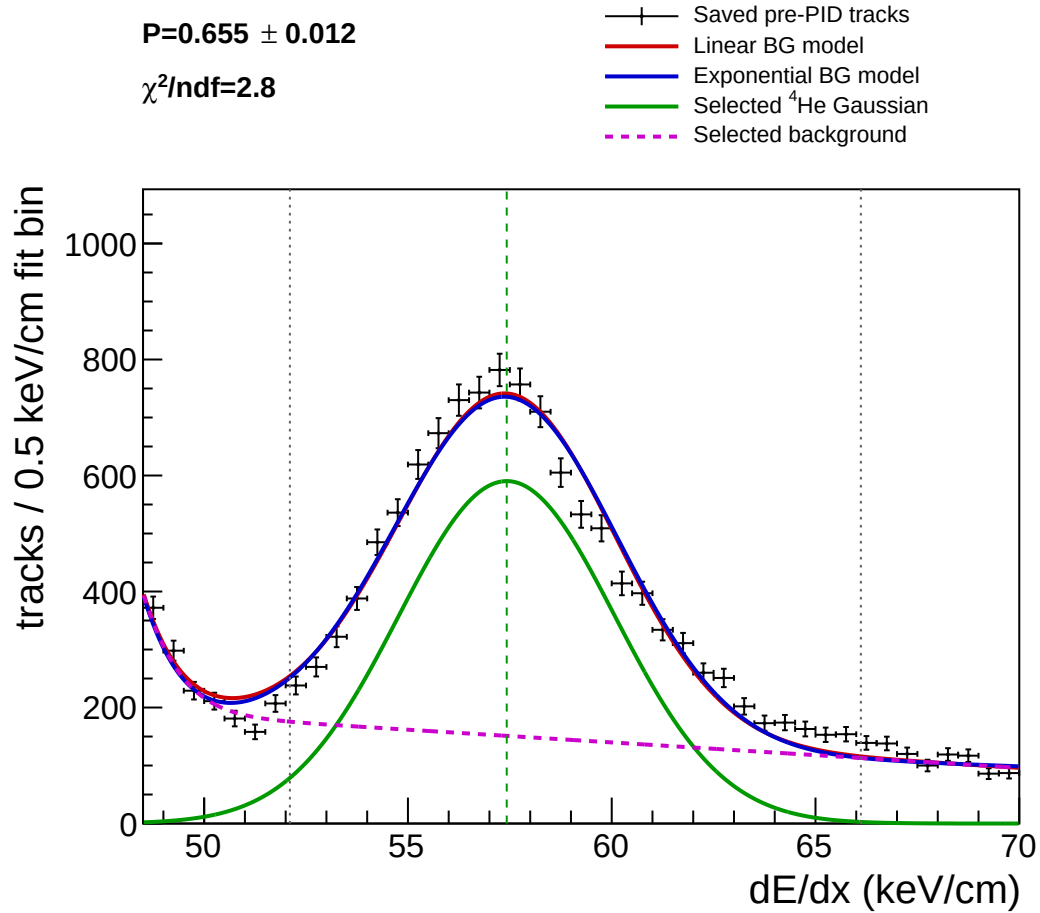


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 13.5 GeV beam energy | 2020 P24iy | inclusive accepted events

R=0.75-0.76 GeV/c [log]

P=0.804 ± 0.013

χ^2/ndf=3.6

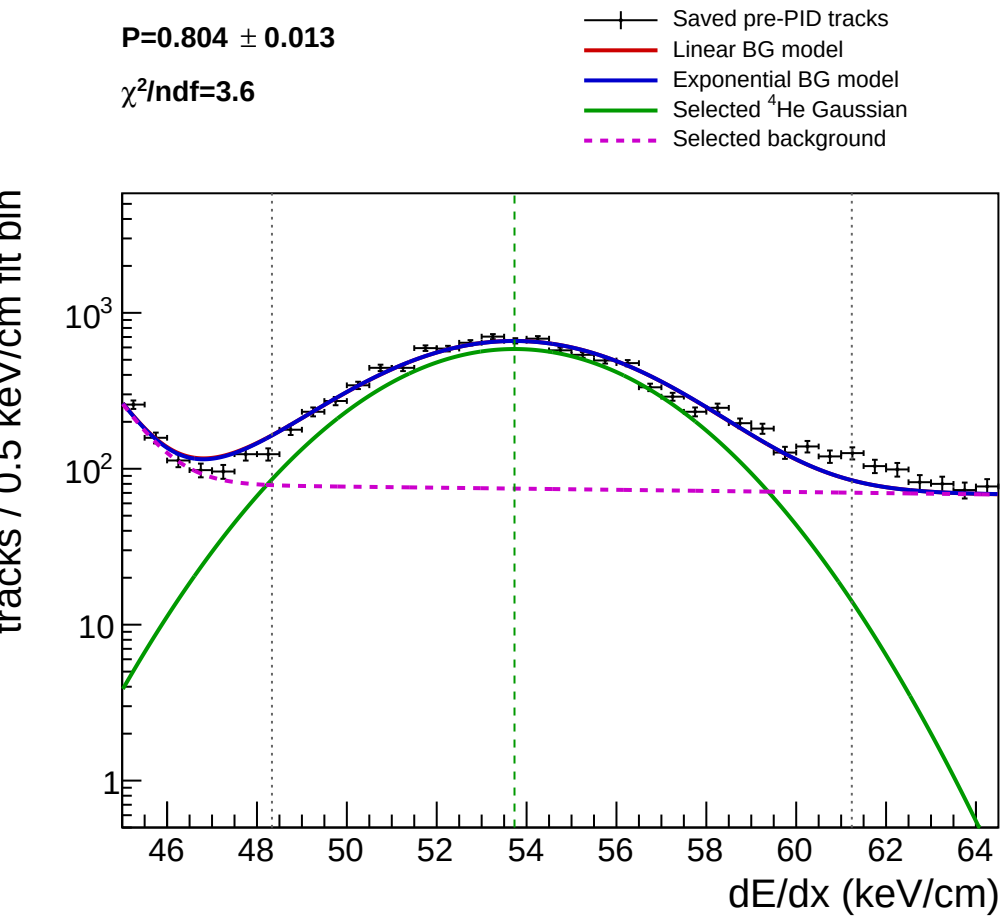


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 13.5 GeV beam energy | 2020 P24iy | inclusive accepted events

R=0.75-0.76 GeV/c [linear]

P=0.804 ± 0.013

χ^2/ndf=3.6

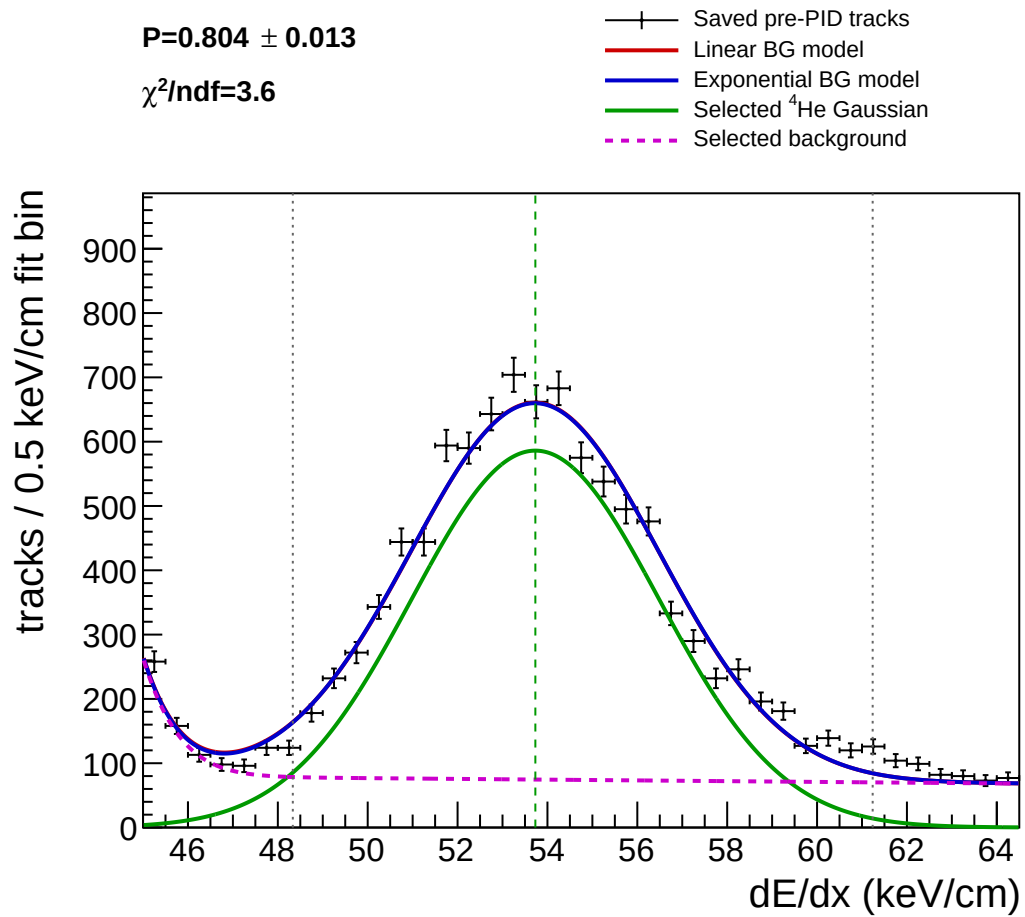


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 13.5 GeV beam energy | 2020 P24iy | inclusive accepted events

R=0.80-0.81 GeV/c [log]

P=0.886 ± 0.013 [poor fit]

χ^2/ndf=4.0

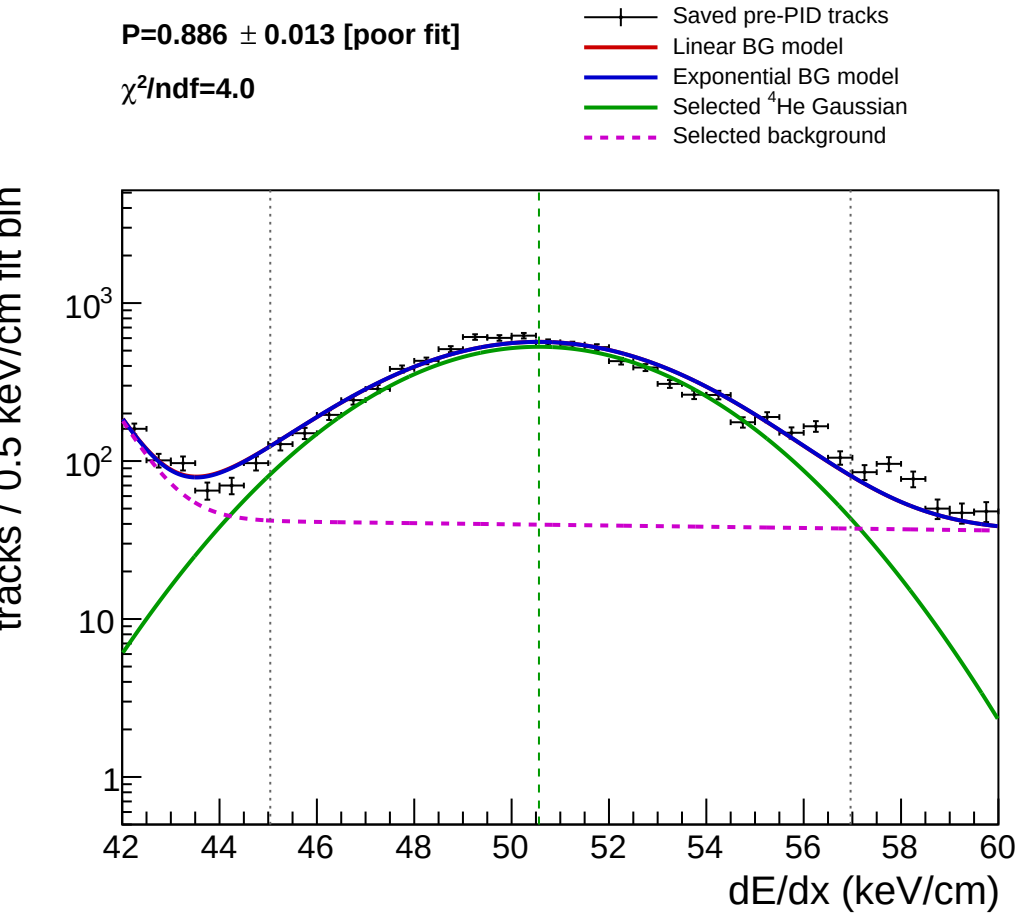


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 13.5 GeV beam energy | 2020 P24iy | inclusive accepted events

R=0.80-0.81 GeV/c [linear]

P=0.886 ± 0.013 [poor fit]

χ^2/ndf=4.0

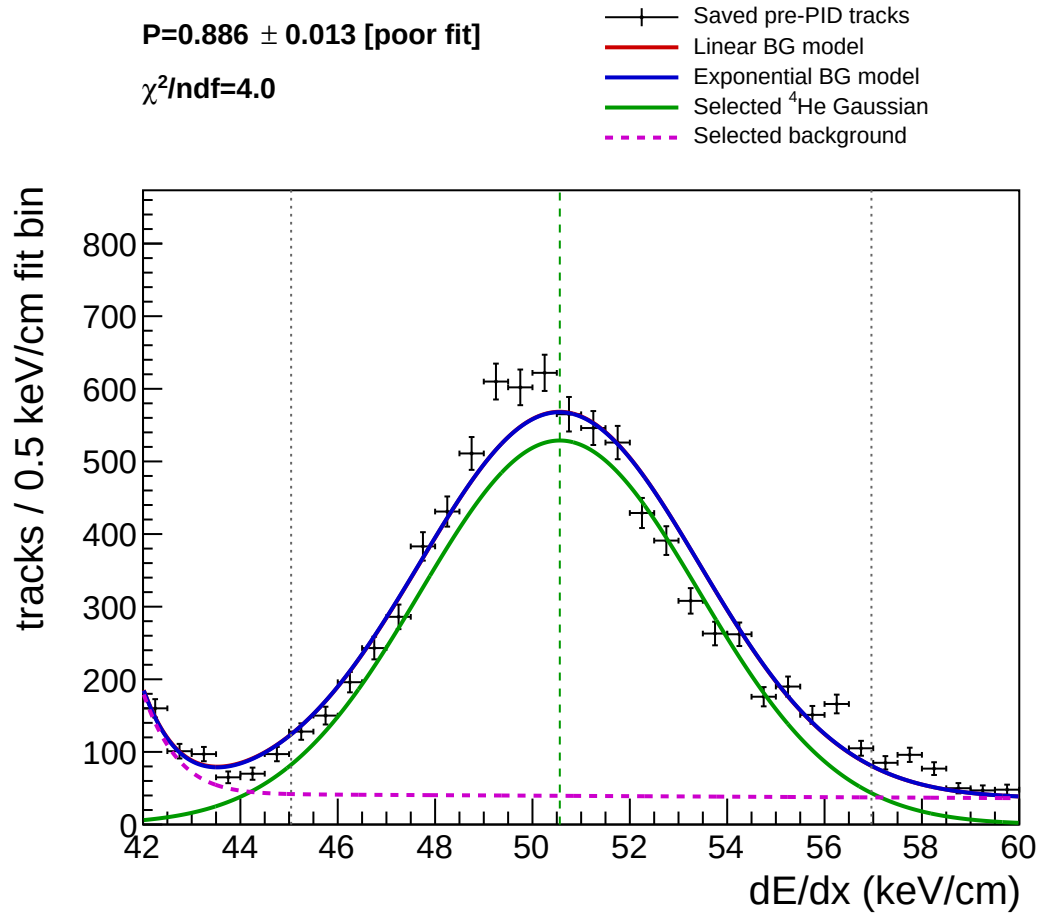


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 13.5 GeV beam energy | 2020 P24iy | inclusive accepted events

R=1.00-1.01 GeV/c [log]

P=0.928 ± 0.010

χ^2/ndf=1.6

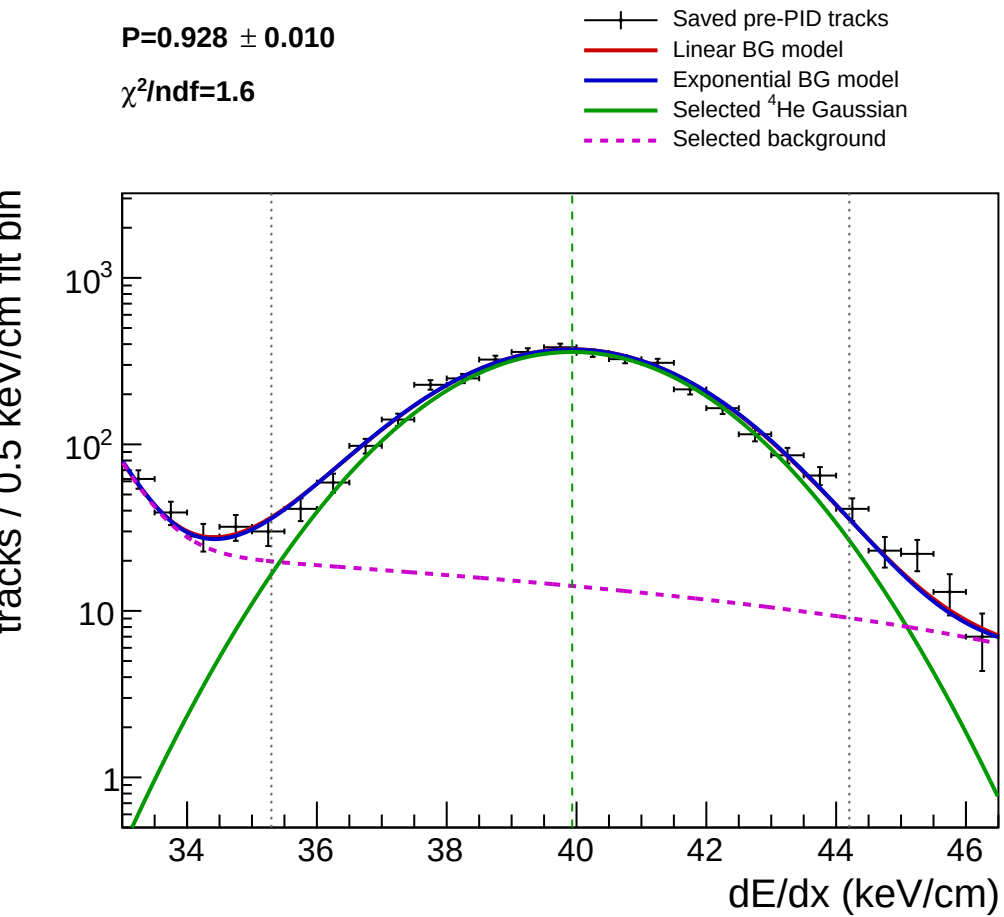


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 13.5 GeV beam energy | 2020 P24iy | inclusive accepted events

R=1.00-1.01 GeV/c [linear]

P=0.928 ± 0.010

χ^2/ndf=1.6

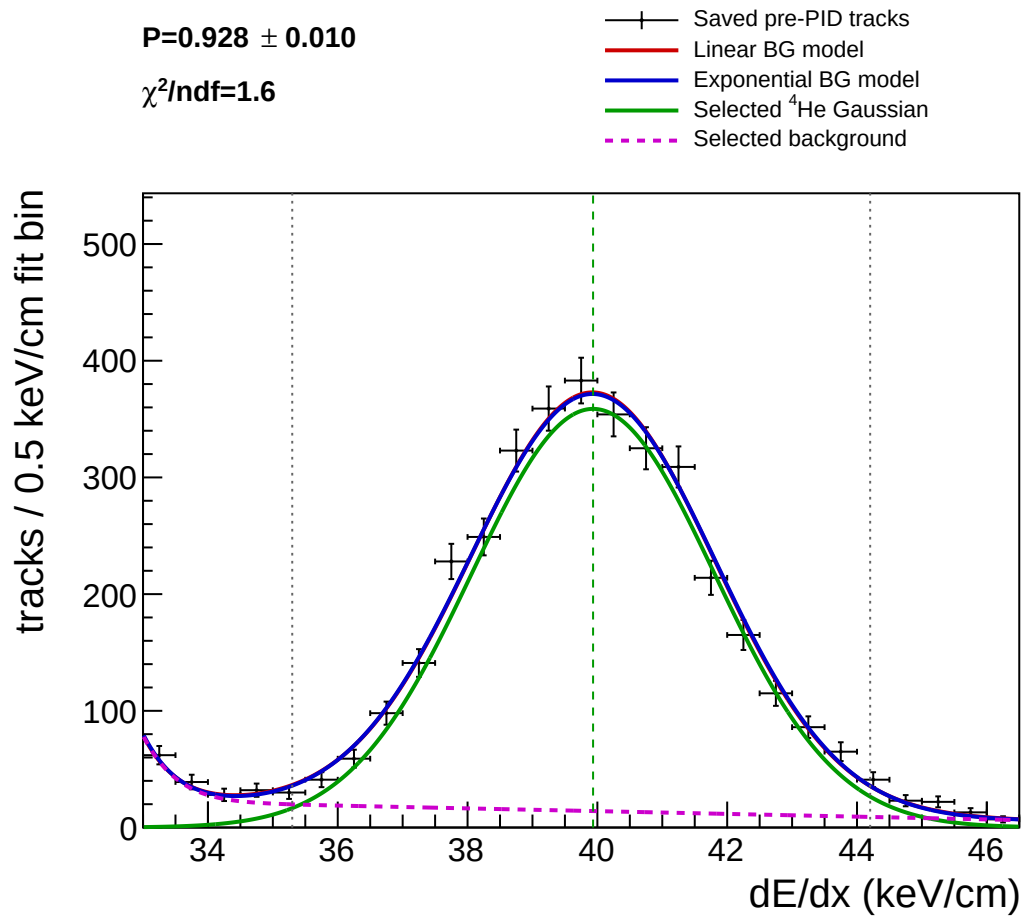

Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm