
Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.50-0.51 GeV/c [log]

P=0.626 ± 0.002 [poor fit]

χ^2/ndf=14.6

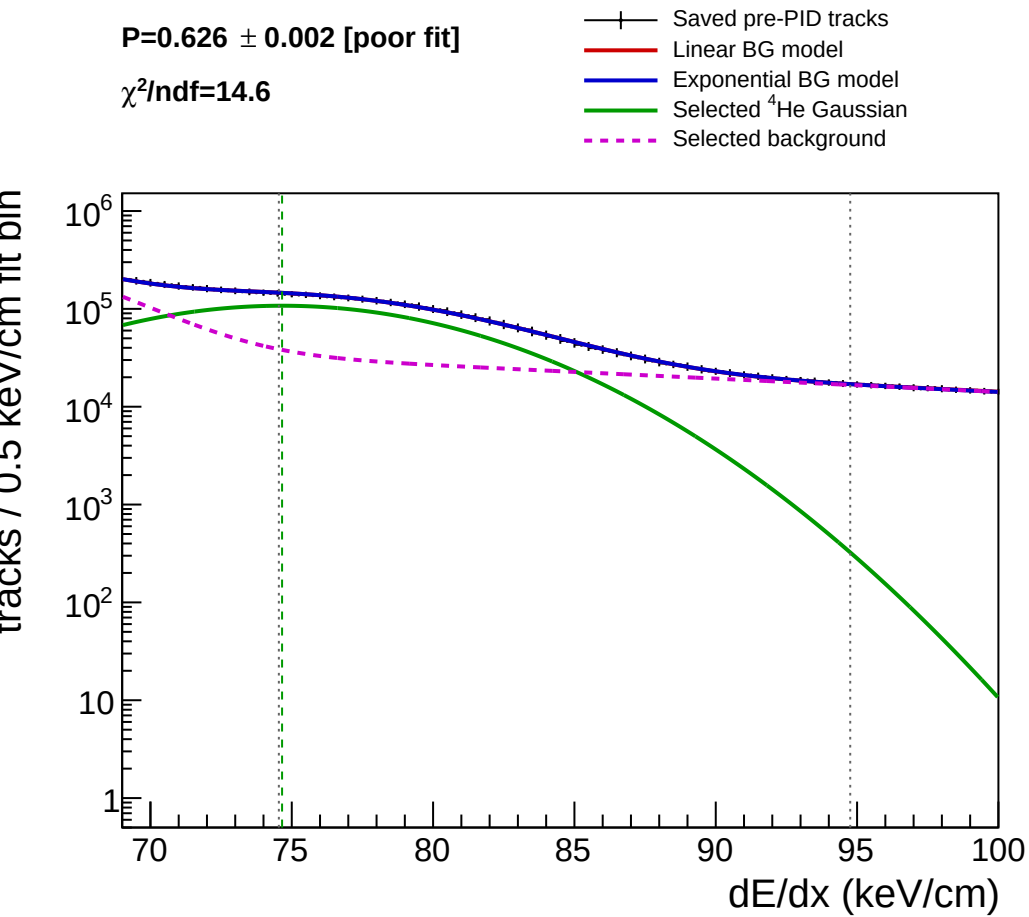


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.50-0.51 GeV/c [linear]

P=0.626 ± 0.002 [poor fit]

χ^2/ndf=14.6

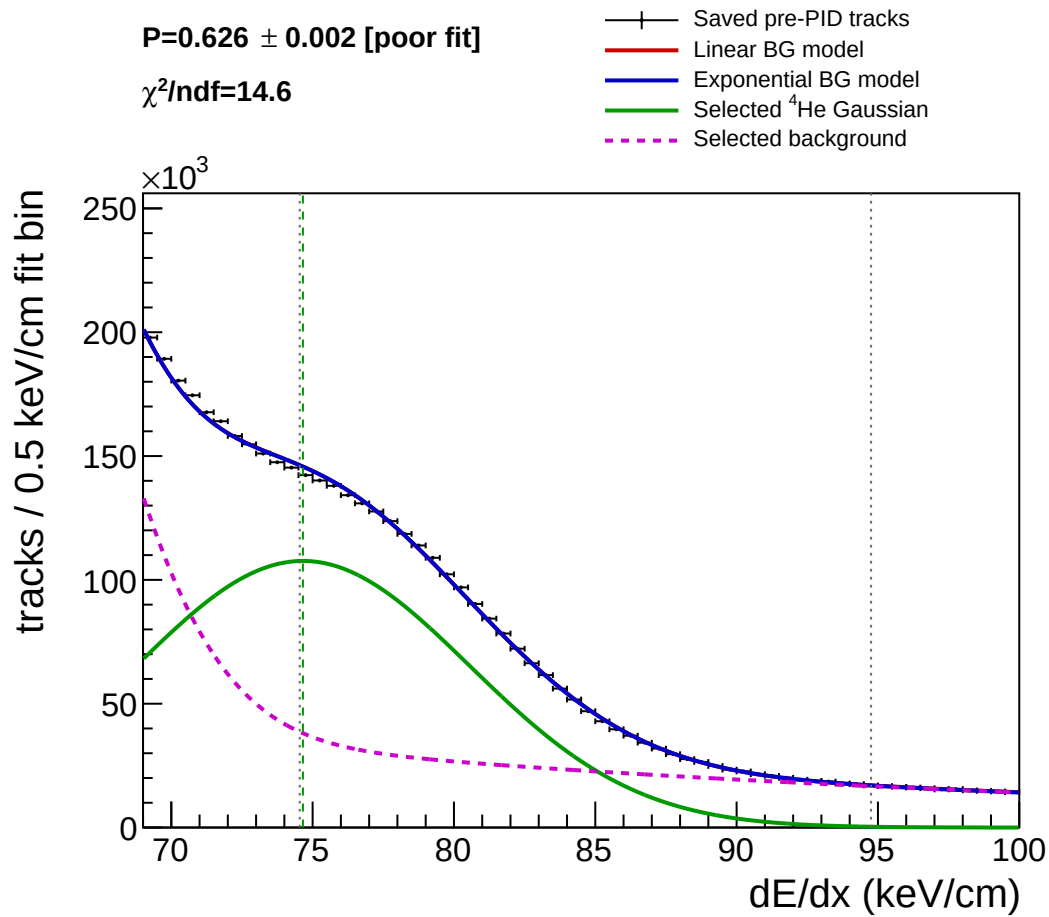


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.55-0.56 GeV/c [log]

P=0.434 ± 0.005 [poor fit]

χ^2/ndf=30.6

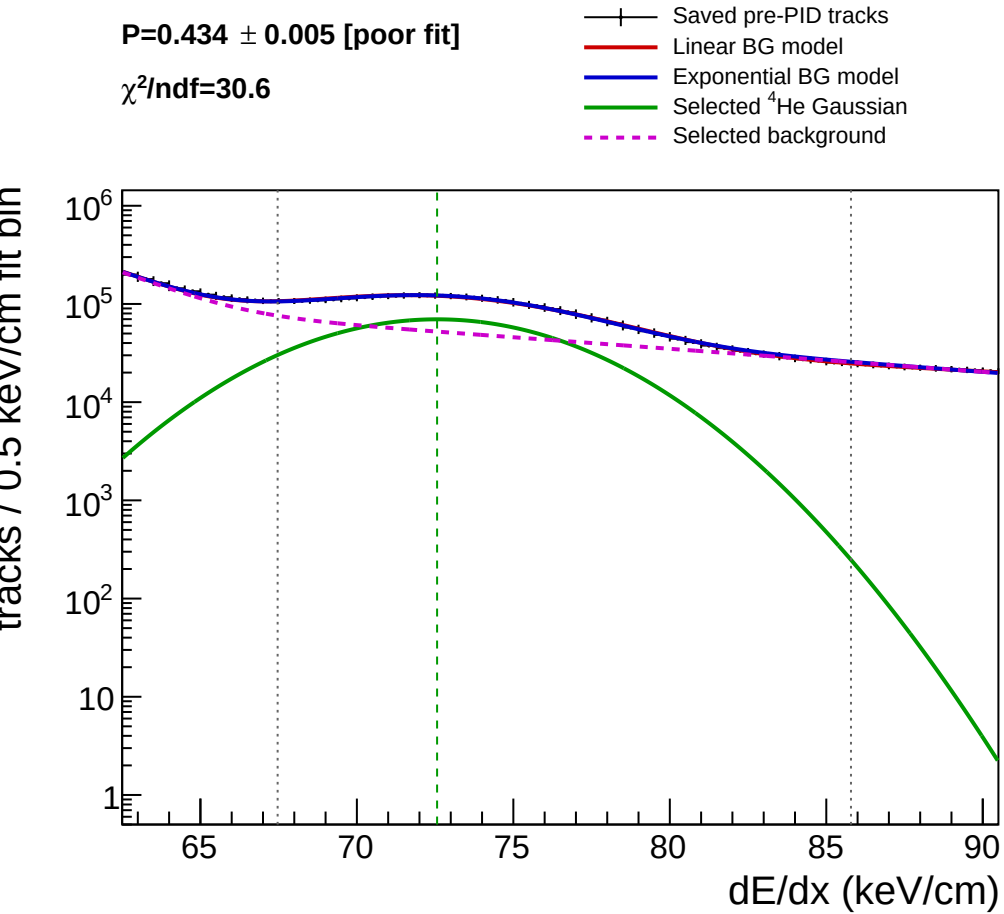


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.55-0.56 GeV/c [linear]

P=0.434 ± 0.005 [poor fit]

χ^2/ndf=30.6

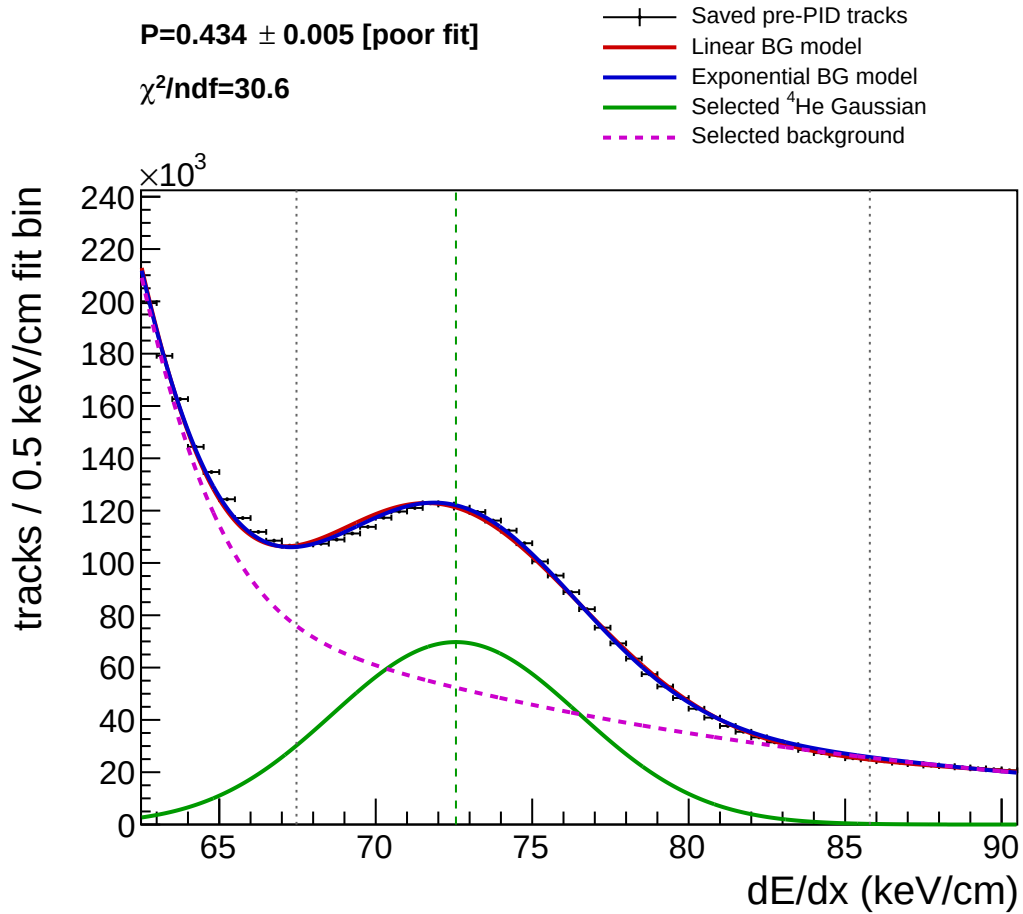


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.60-0.61 GeV/c [log]

P=0.491 ± 0.001 [poor fit]

χ^2/ndf=18.3

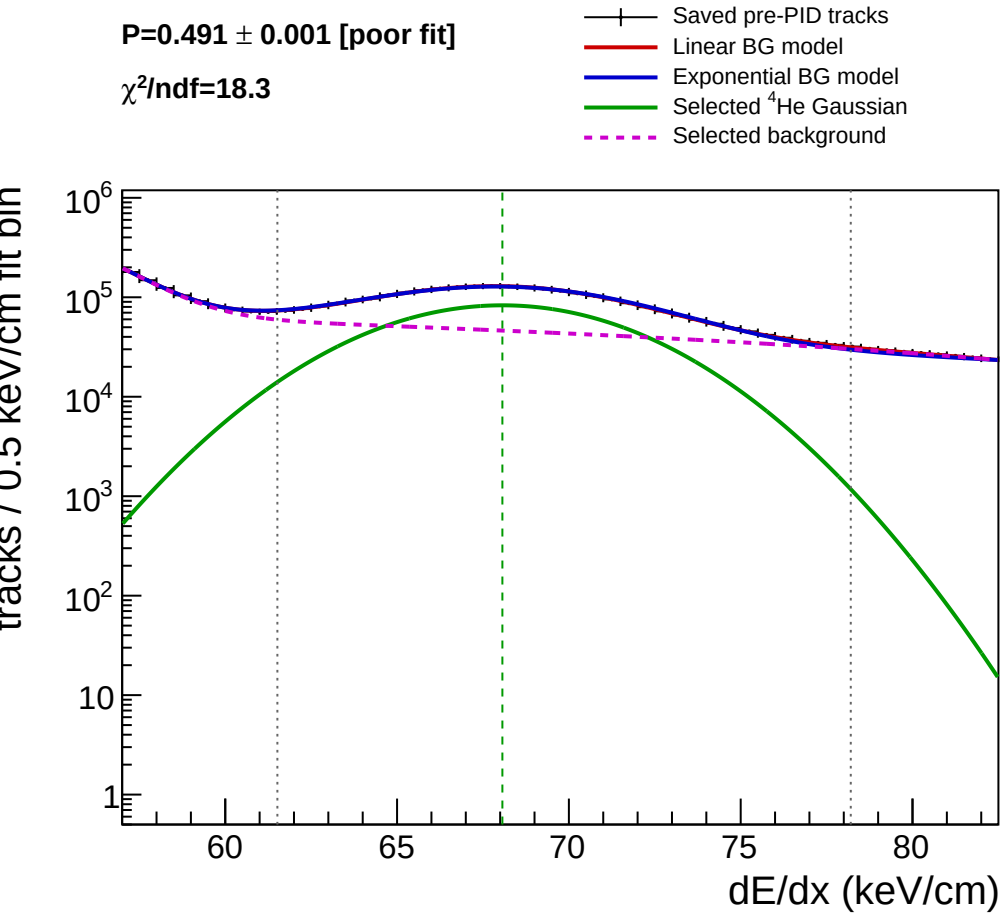


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.60-0.61 GeV/c [linear]

P=0.491 ± 0.001 [poor fit]

χ^2/ndf=18.3

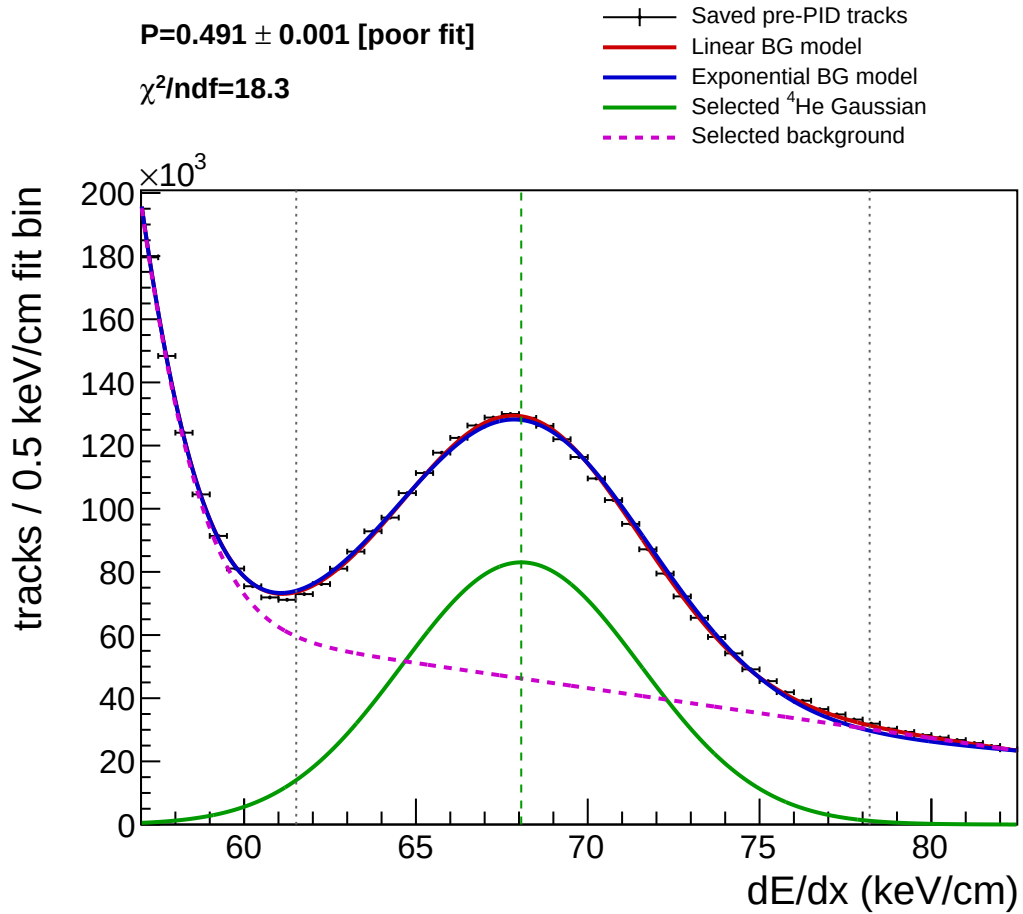


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.65-0.66 GeV/c [log]

P=0.731 ± 0.002 [poor fit]

χ^2/ndf=254.3

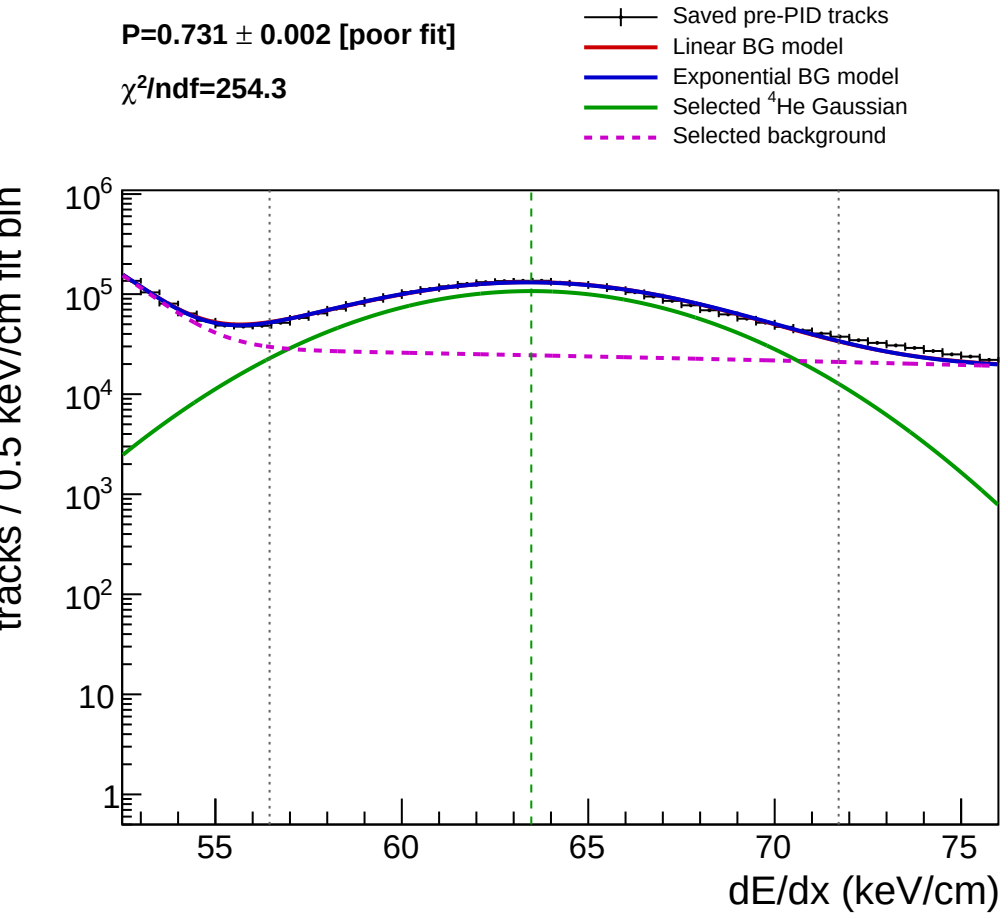


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.65-0.66 GeV/c [linear]

P=0.731 ± 0.002 [poor fit]

χ^2/ndf=254.3

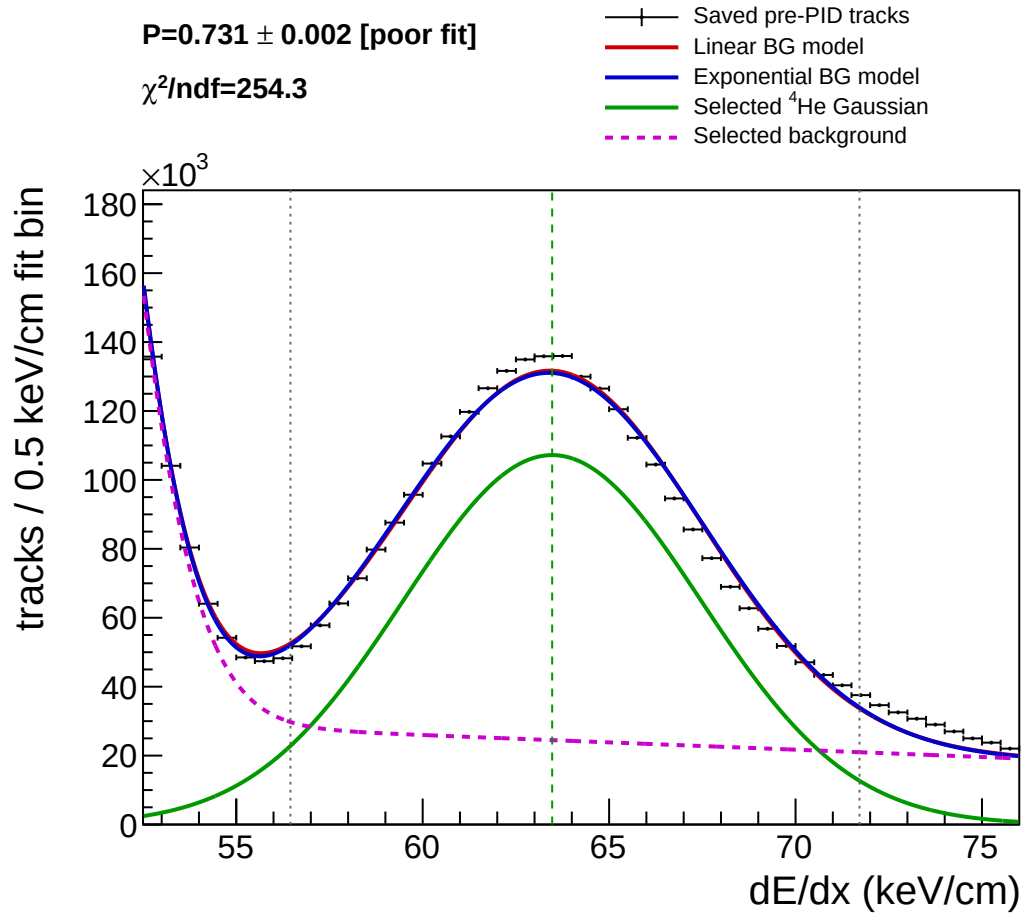


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.70-0.71 GeV/c [log]

P=0.919 ± 0.000 [poor fit]

χ^2/ndf=342.0

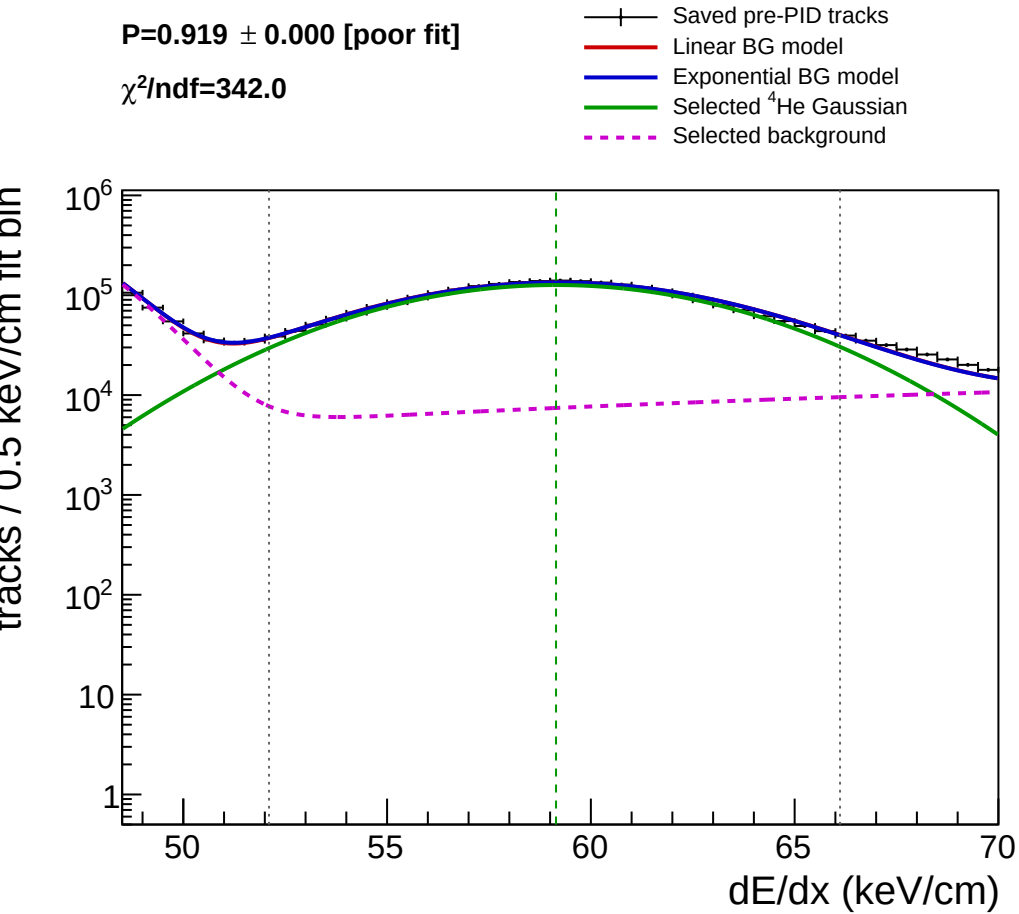


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.70-0.71 GeV/c [linear]

P=0.919 ± 0.000 [poor fit]

χ^2/ndf=342.0

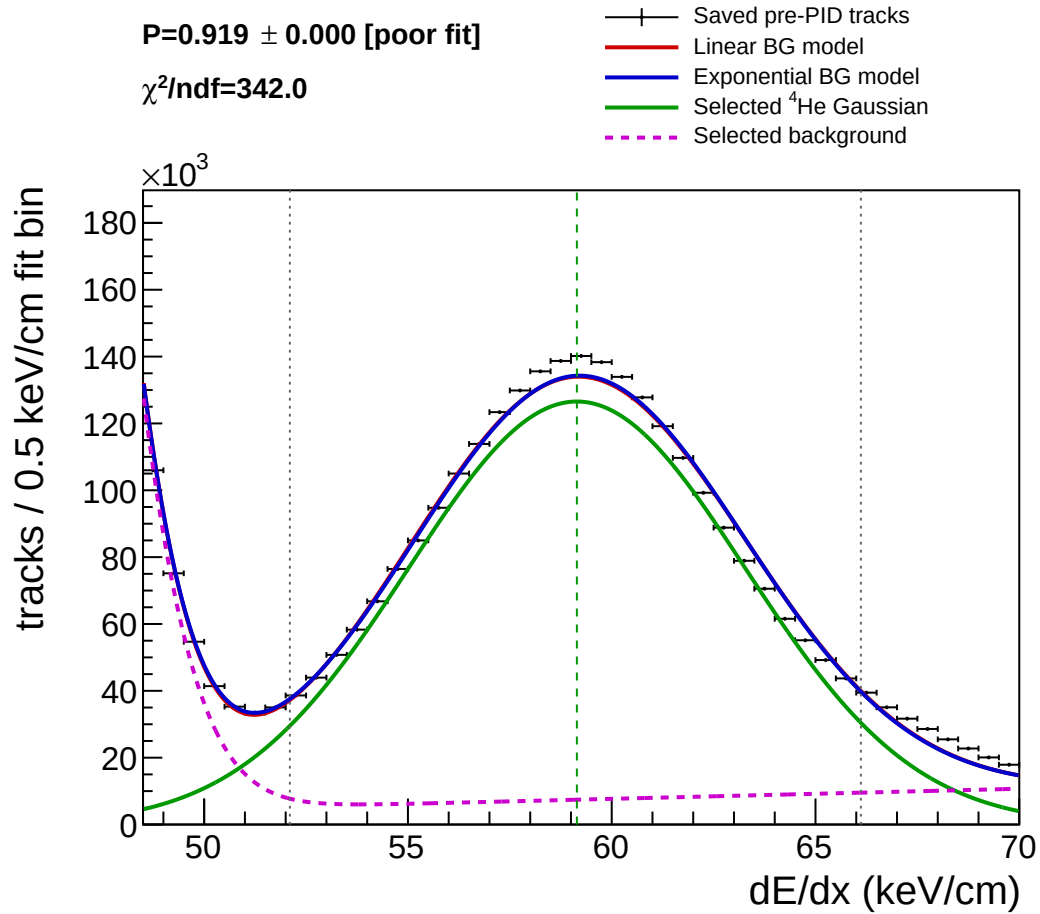


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.75-0.76 GeV/c [log]

P=0.960 ± 0.000 [poor fit]

χ^2/ndf=535.0

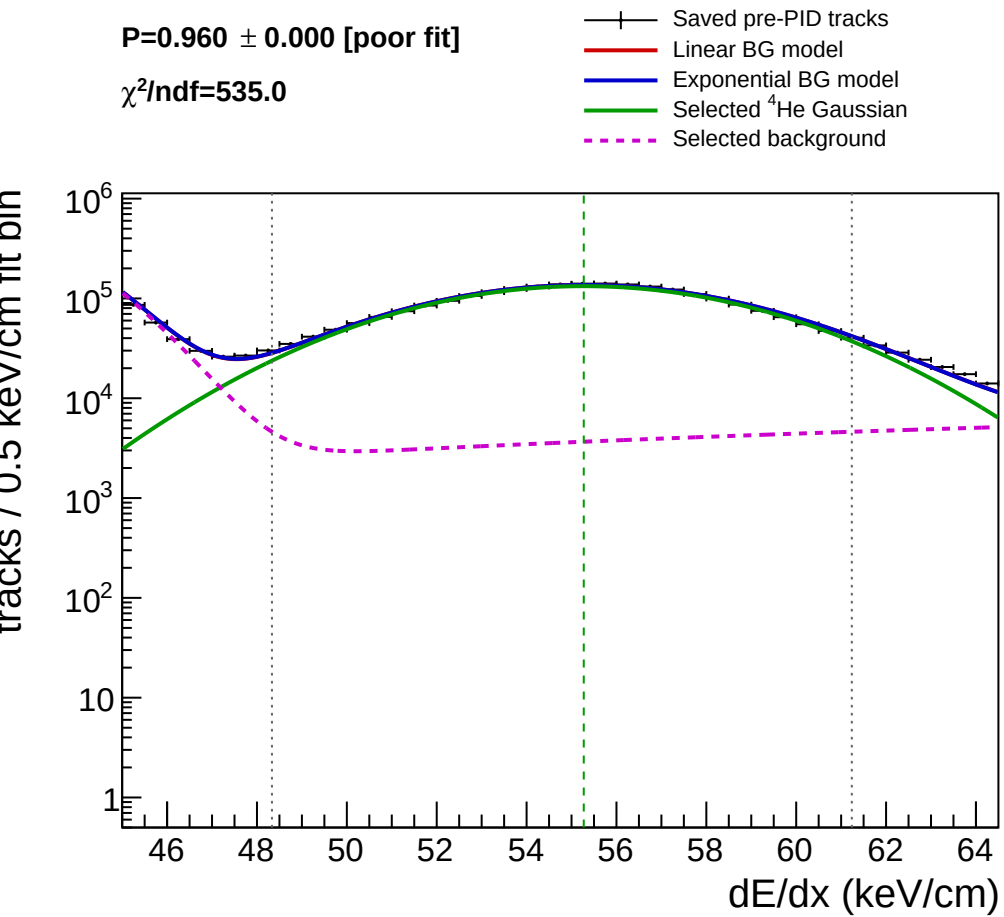


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.75-0.76 GeV/c [linear]

P=0.960 ± 0.000 [poor fit]

χ^2/ndf=535.0

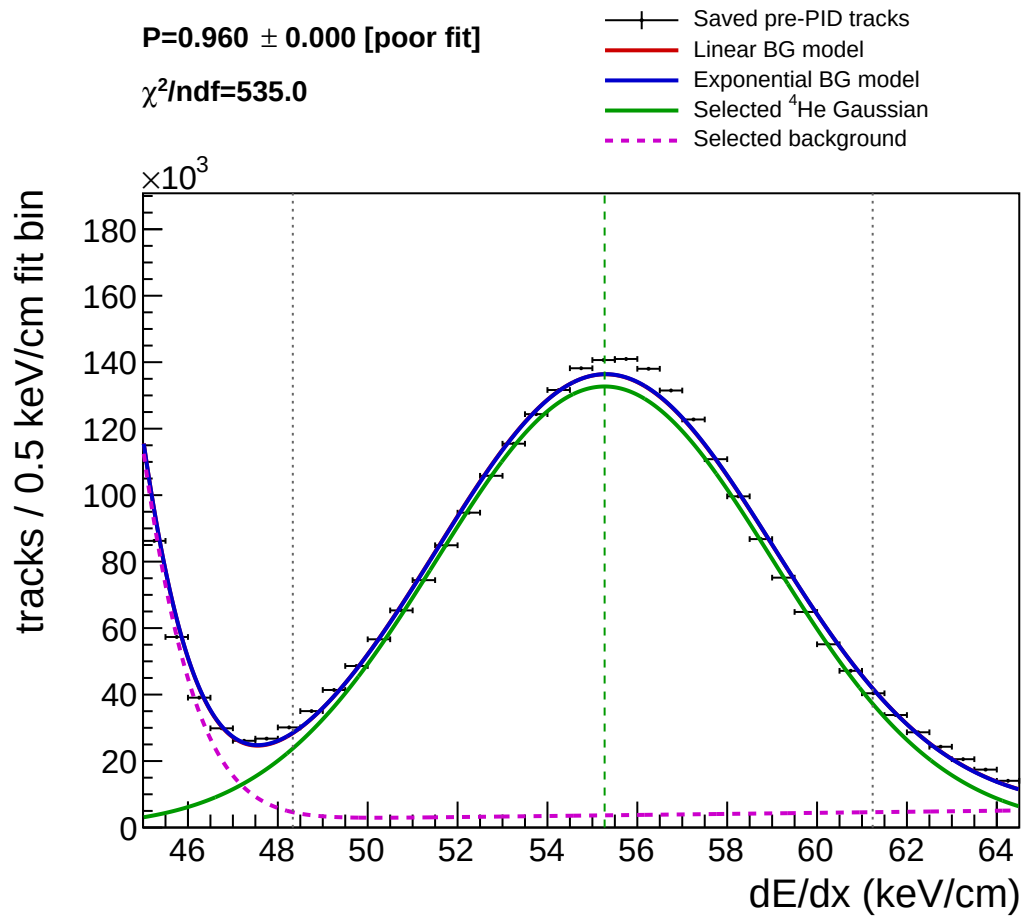


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.80-0.81 GeV/c [log]

P=0.970 ± 0.001 [poor fit]

χ^2/ndf=877.6

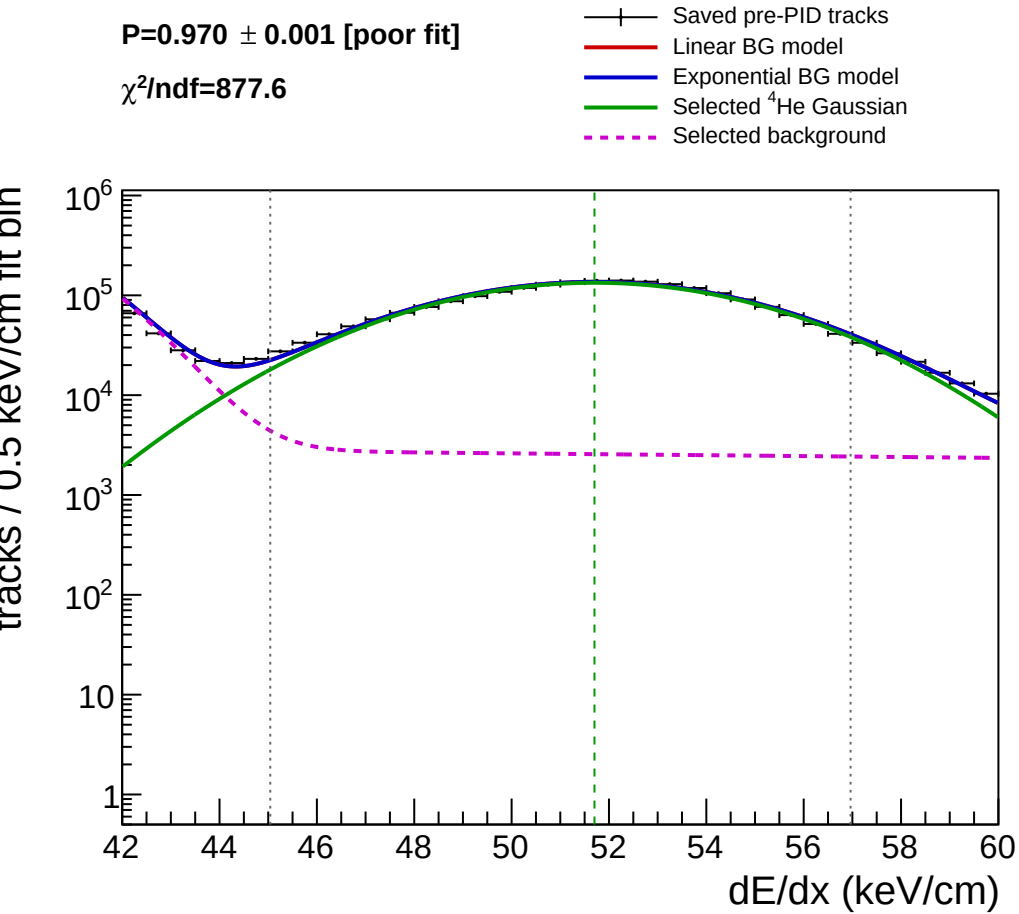


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.80-0.81 GeV/c [linear]

P=0.970 ± 0.001 [poor fit]

χ^2/ndf=877.6

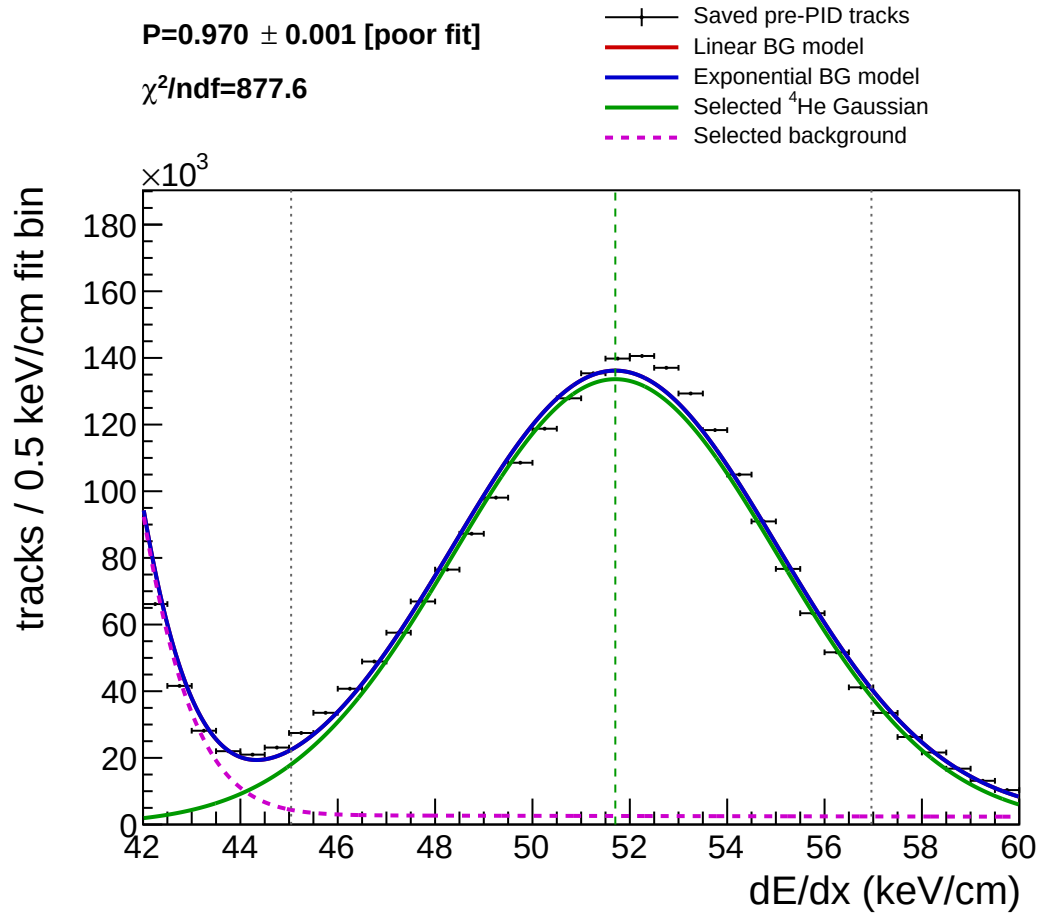


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=1.00-1.01 GeV/c [log]

P=0.928 ± 0.001 [poor fit]

χ^2/ndf=1023.1

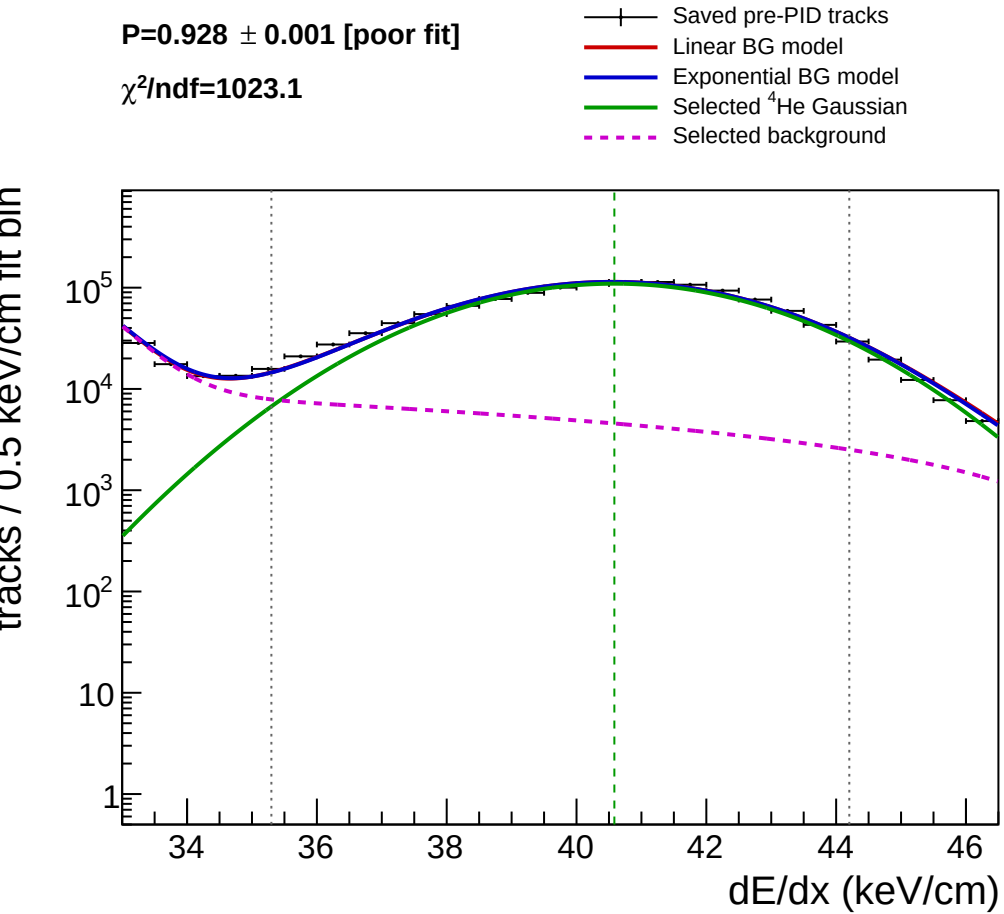


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=1.00-1.01 GeV/c [linear]

P=0.928 ± 0.001 [poor fit]

χ^2/ndf=1023.1

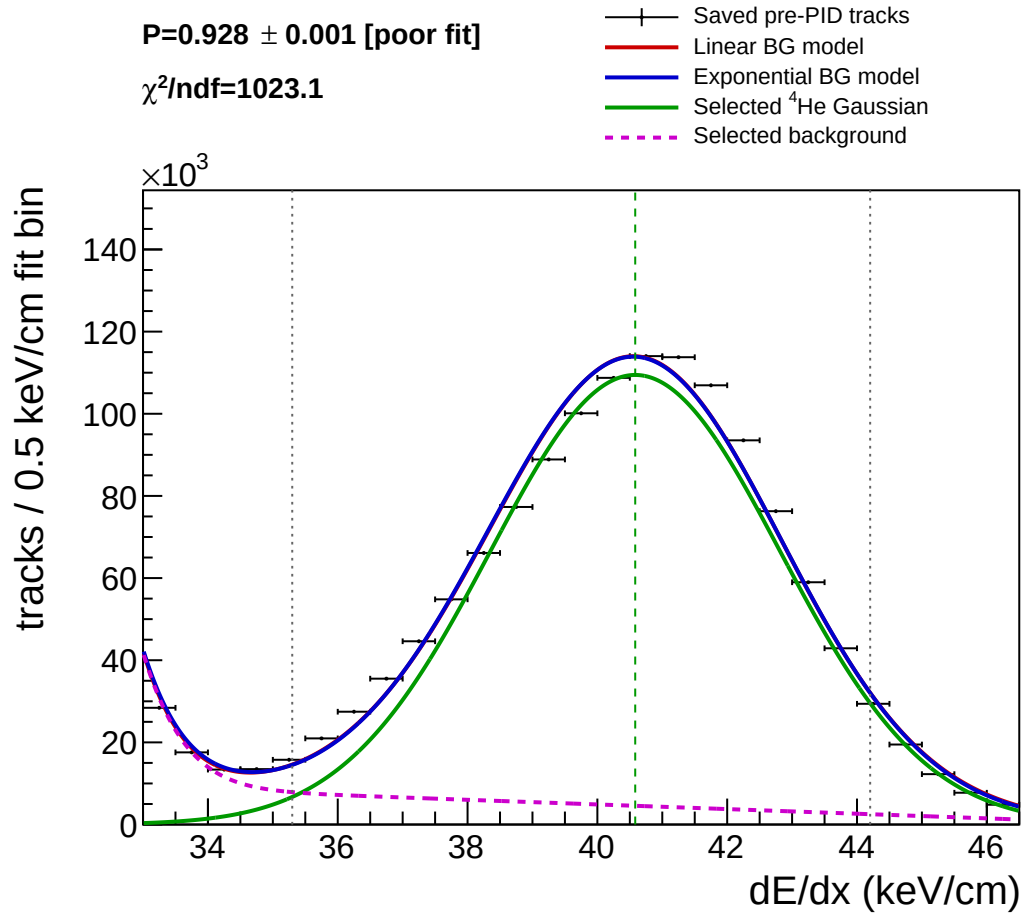

Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm