Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events


R=0.40-0.41 GeV/c [log]

No accepted fit

Does not imply no peak

Components from unaccepted model

Saved pre-PID tracks
Linear BG model
Exponential BG model
^{4}He: unaccepted model
Summed background
T (triton) Gaussian
^{3}He Gaussian

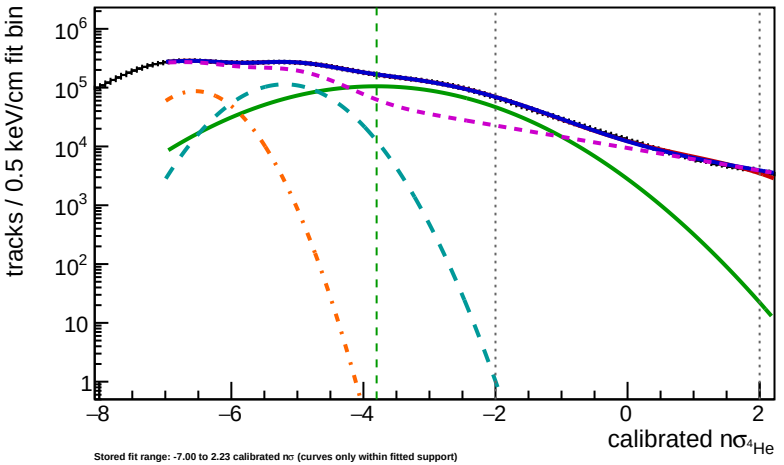

Stored fit range: -7.00 to 2.23 calibrated nσ (curves only within fitted support)

Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm; display clipped to stored axis

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events


R=0.40-0.41 GeV/c [linear]

No accepted fit

Does not imply no peak

Components from unaccepted model

Saved pre-PID tracks
Linear BG model
Exponential BG model
^{4}He: unaccepted model
Summed background
T (triton) Gaussian
^{3}He Gaussian

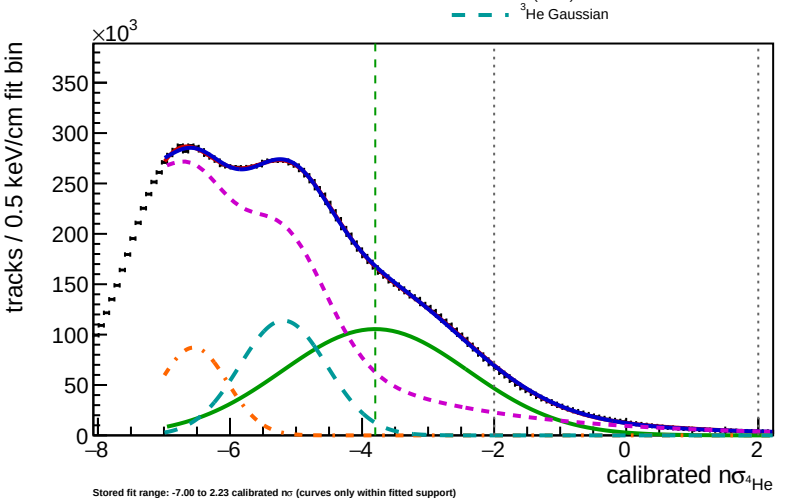

Stored fit range: -7.00 to 2.23 calibrated nσ (curves only within fitted support)

Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm; display clipped to stored axis

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events


R=0.40-0.41 GeV/c [log]

No accepted fit

Does not imply no peak

Components from unaccepted model

Saved pre-PID tracks
Linear BG model
Exponential BG model
^{4}He: unaccepted model
Summed background
T (triton) Gaussian
^{3}He Gaussian

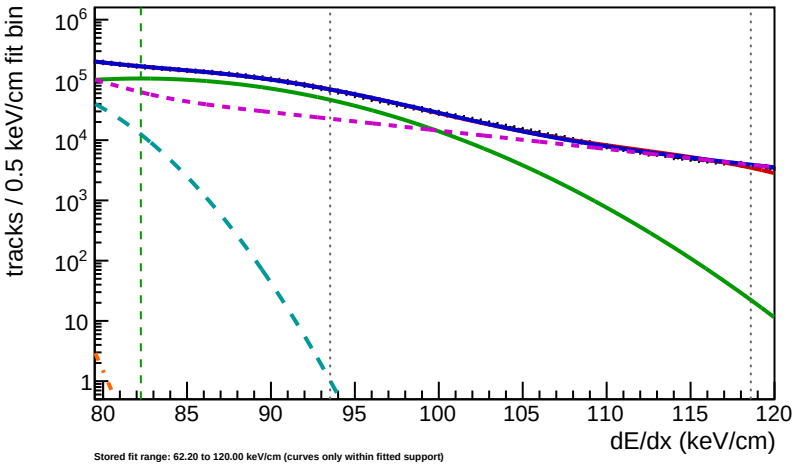

Stored fit range: 62.20 to 120.00 keV/cm (curves only within fitted support)

Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm; display clipped to stored axis

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events


R=0.40-0.41 GeV/c [linear]

No accepted fit

Does not imply no peak

Components from unaccepted model

Saved pre-PID tracks
Linear BG model
Exponential BG model
^{4}He: unaccepted model
Summed background
T (triton) Gaussian
^{3}He Gaussian

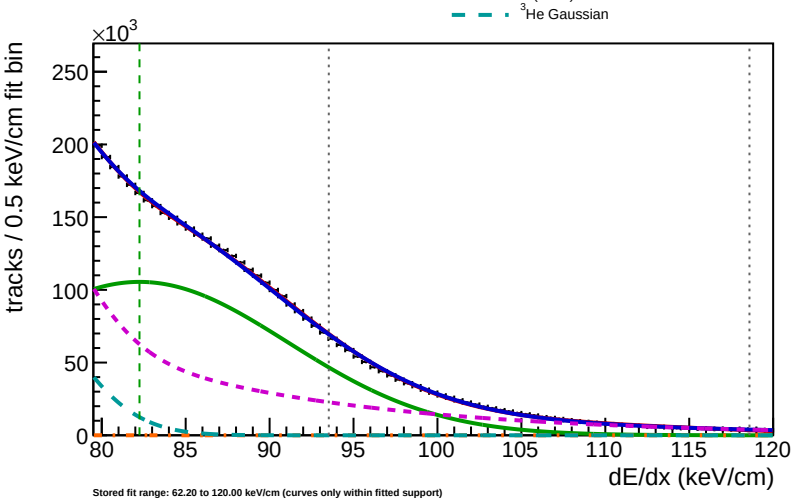

Stored fit range: 62.20 to 120.00 keV/cm (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm; display clipped to stored axis

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.41-0.42 GeV/c [log]

P=0.535 ± 0.005 [poor fit]

χ^2/ndf=7.5

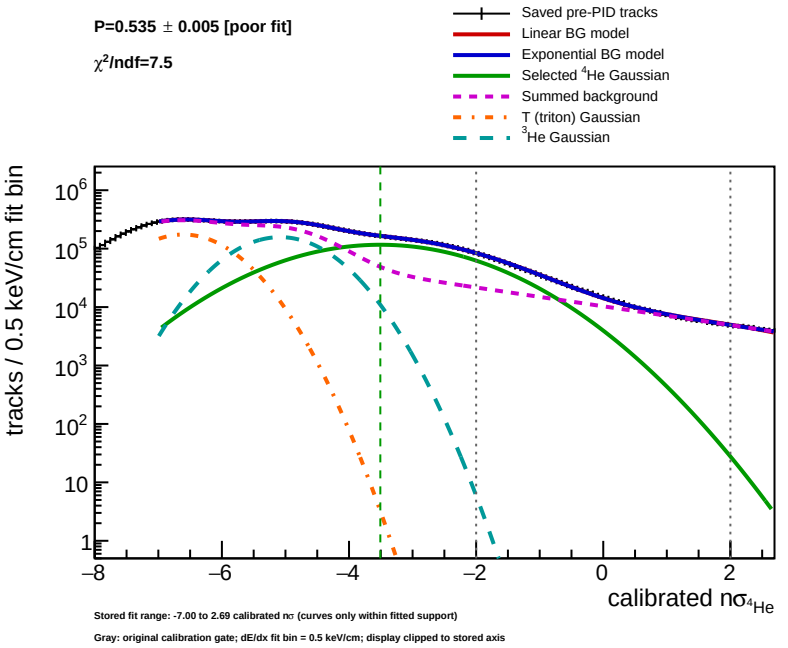

Stored fit range: -7.00 to 2.69 calibrated nσ (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm; display clipped to stored axis

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.41-0.42 GeV/c [linear]

P=0.535 ± 0.005 [poor fit]

χ^2/ndf=7.5

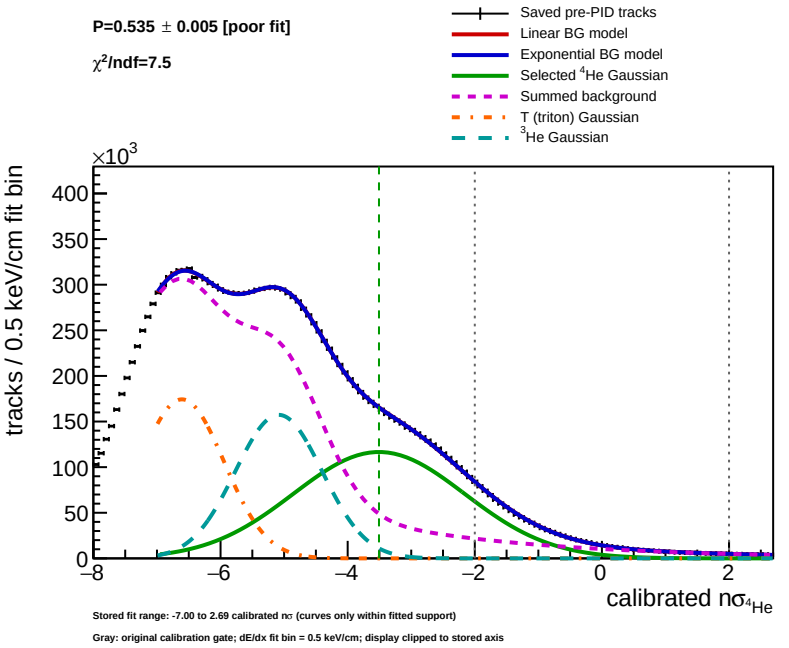

Stored fit range: -7.00 to 2.69 calibrated nσ (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm; display clipped to stored axis

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.41-0.42 GeV/c [log]

P=0.535 ± 0.005 [poor fit]

χ^2/ndf=7.5

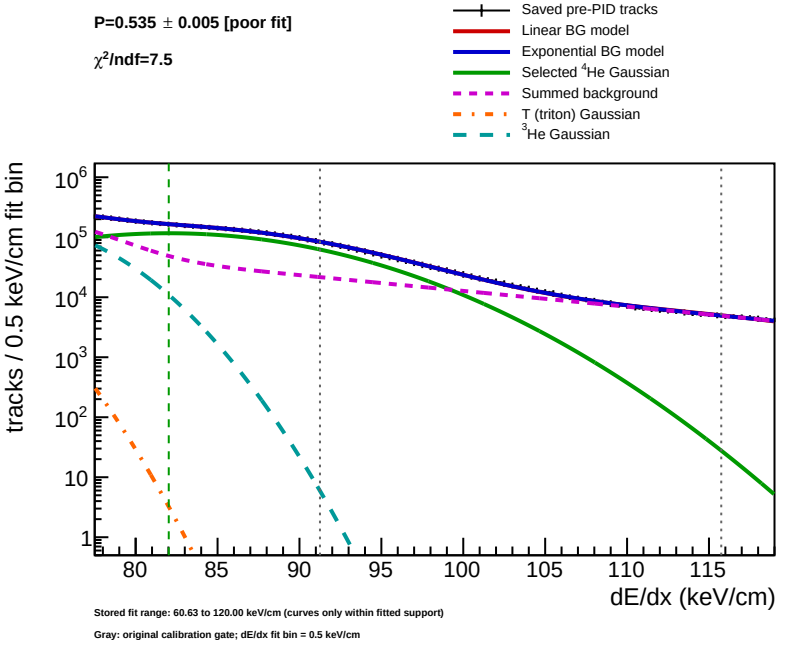

Stored fit range: 60.63 to 120.00 keV/cm (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.41-0.42 GeV/c [linear]

P=0.535 ± 0.005 [poor fit]

χ^2/ndf=7.5

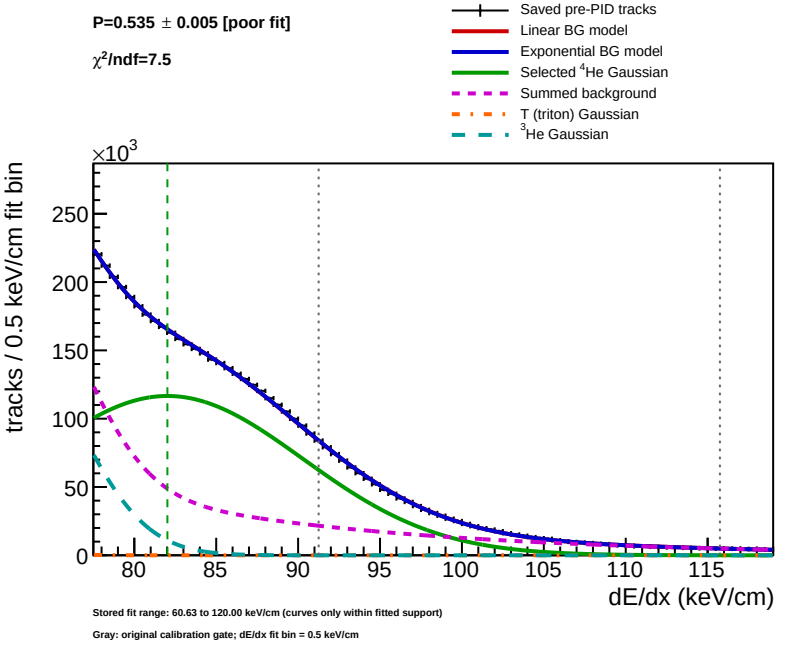

Stored fit range: 60.63 to 120.00 keV/cm (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.42-0.43 GeV/c [log]

P=0.598 ± 0.004

χ^2/ndf=4.3

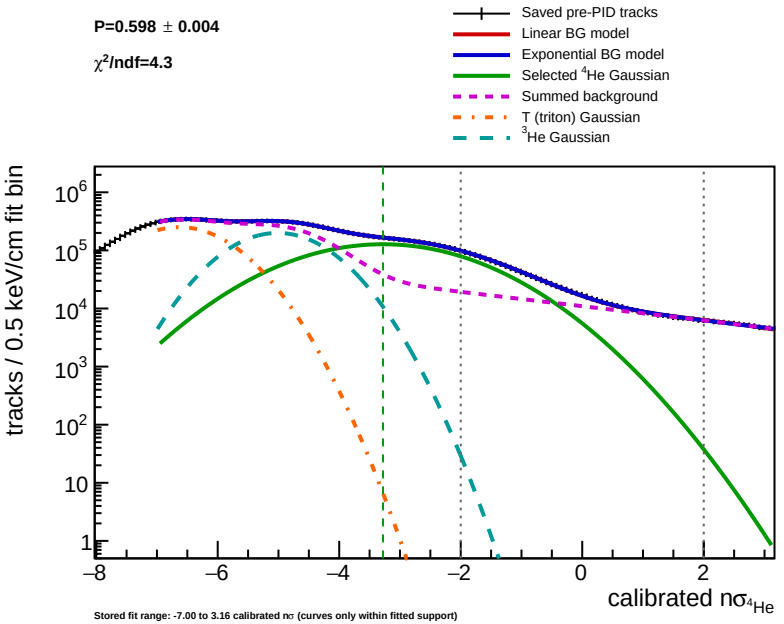

Stored fit range: -7.00 to 3.16 calibrated nσ (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm; display clipped to stored axis

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.42-0.43 GeV/c [linear]

P=0.598 ± 0.004

χ^2/ndf=4.3

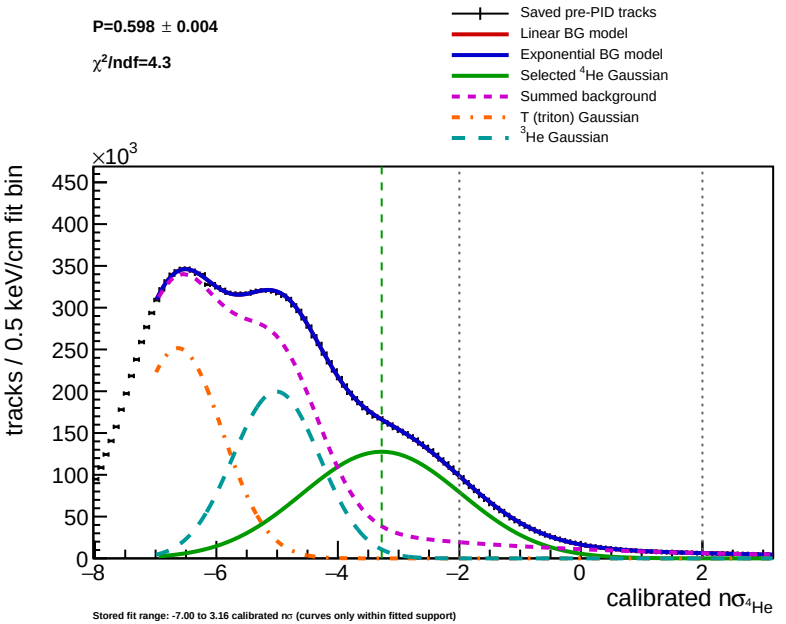

Stored fit range: -7.00 to 3.16 calibrated nσ (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm; display clipped to stored axis

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.42-0.43 GeV/c [log]

P=0.598 ± 0.004

χ^2/ndf=4.3

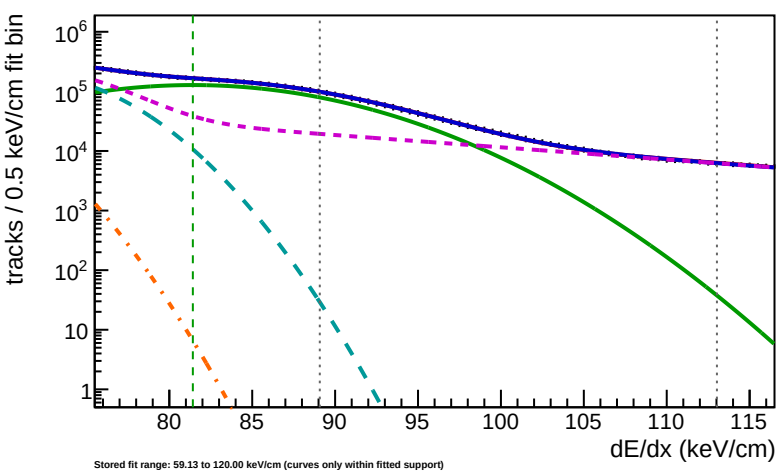

Stored fit range: 59.13 to 120.00 keV/cm (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.42-0.43 GeV/c [linear]

P=0.598 ± 0.004

χ^2/ndf=4.3

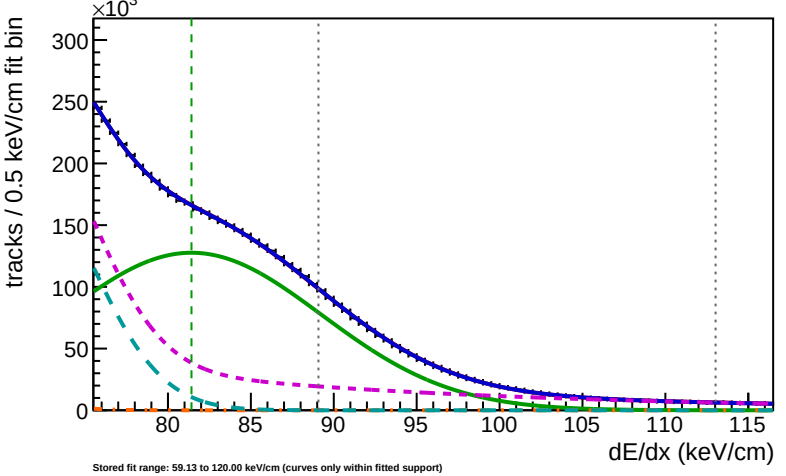

Stored fit range: 59.13 to 120.00 keV/cm (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.43-0.44 GeV/c [log]

P=0.626 ± 0.003

χ^2/ndf=3.3

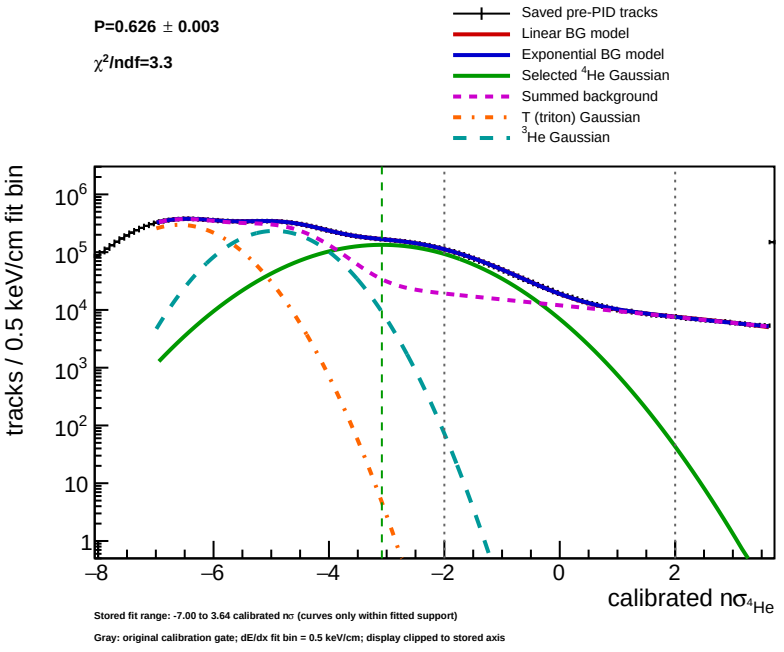

Stored fit range: -7.00 to 3.64 calibrated nσ (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm; display clipped to stored axis

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.43-0.44 GeV/c [linear]

P=0.626 ± 0.003

χ^2/ndf=3.3

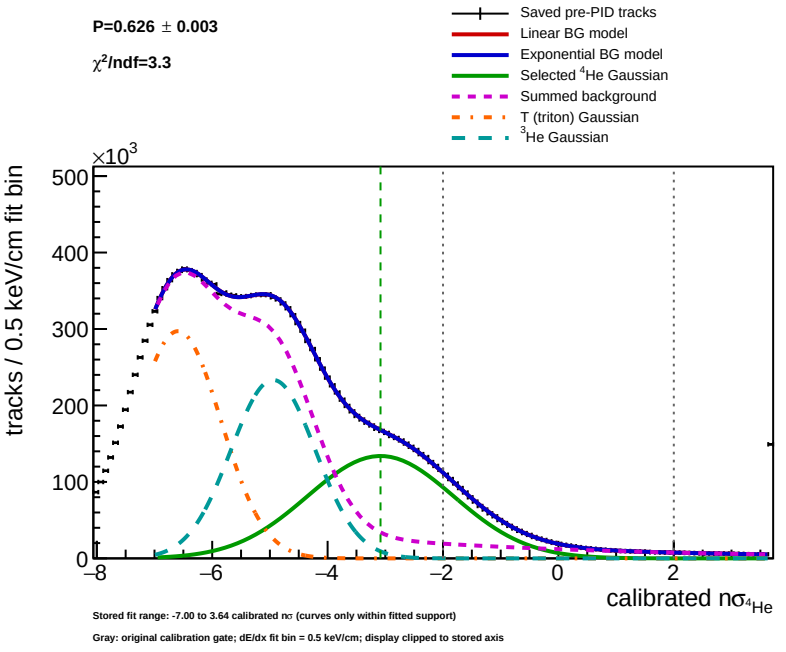

Stored fit range: -7.00 to 3.64 calibrated nσ (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm; display clipped to stored axis

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.43-0.44 GeV/c [log]

P=0.626 ± 0.003

χ^2/ndf=3.3

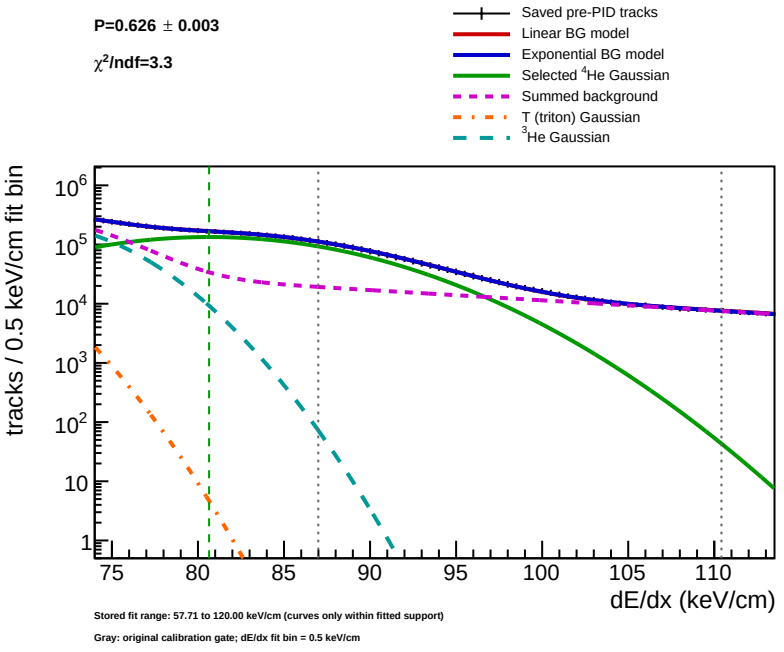

Stored fit range: 57.71 to 120.00 keV/cm (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.43-0.44 GeV/c [linear]

P=0.626 ± 0.003

χ^2/ndf=3.3

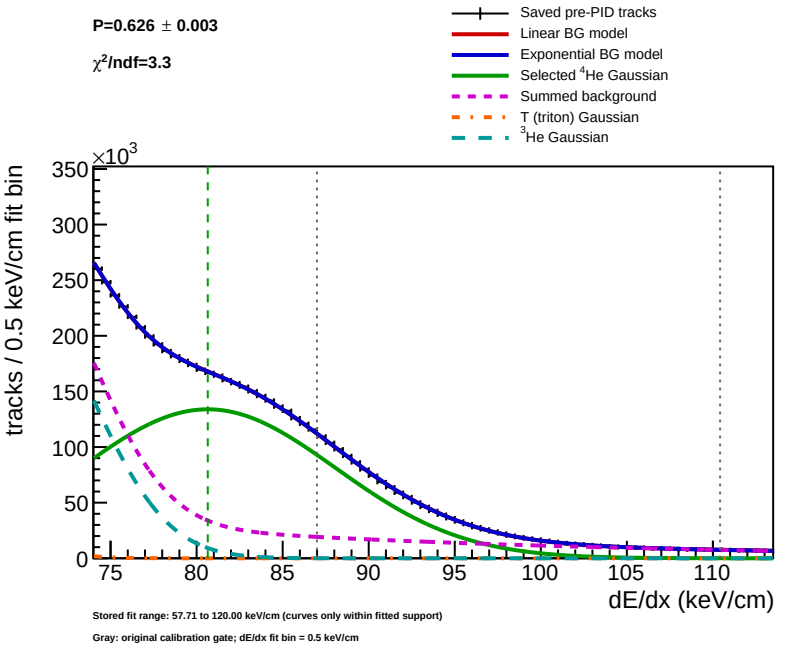

Stored fit range: 57.71 to 120.00 keV/cm (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.44-0.45 GeV/c [log]

P=0.634 ± 0.002

χ^2/ndf=3.1

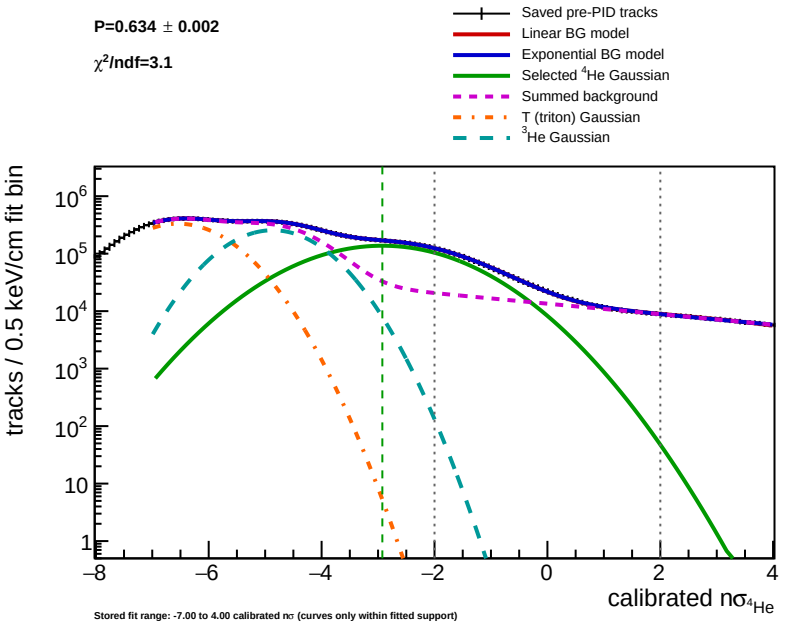

Stored fit range: -7.00 to 4.00 calibrated nσ (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.44-0.45 GeV/c [linear]

P=0.634 ± 0.002

χ^2/ndf=3.1

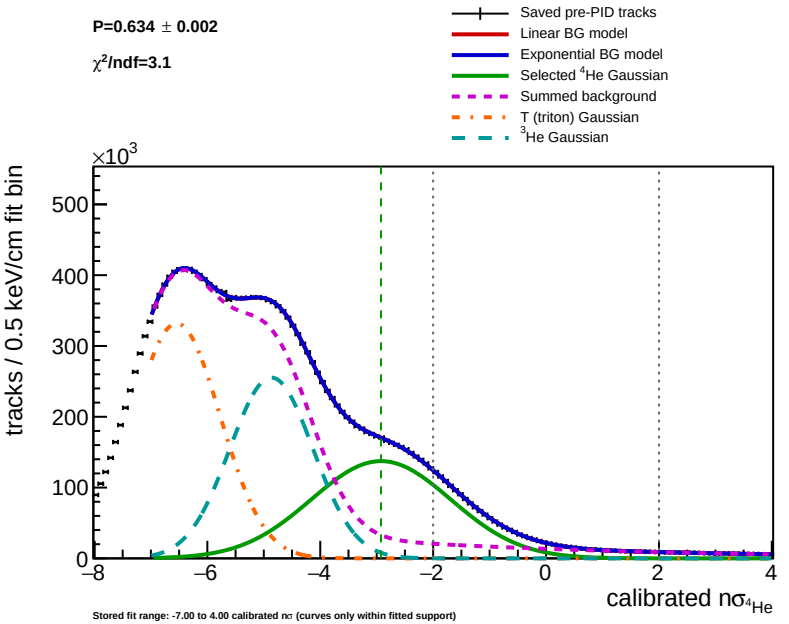

Stored fit range: -7.00 to 4.00 calibrated nσ (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.44-0.45 GeV/c [log]

P=0.634 ± 0.002

χ^2/ndf=3.1

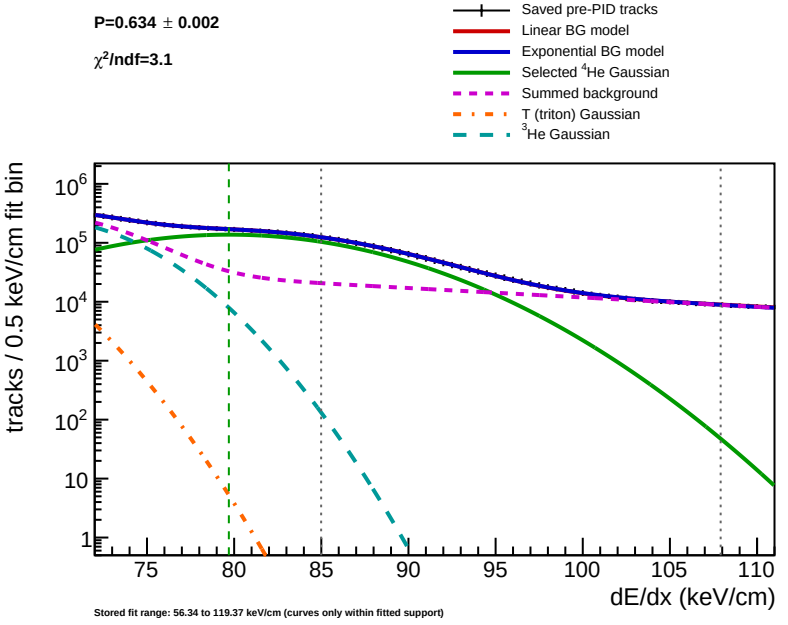

Stored fit range: 56.34 to 119.37 keV/cm (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.44-0.45 GeV/c [linear]

P=0.634 ± 0.002

χ^2/ndf=3.1

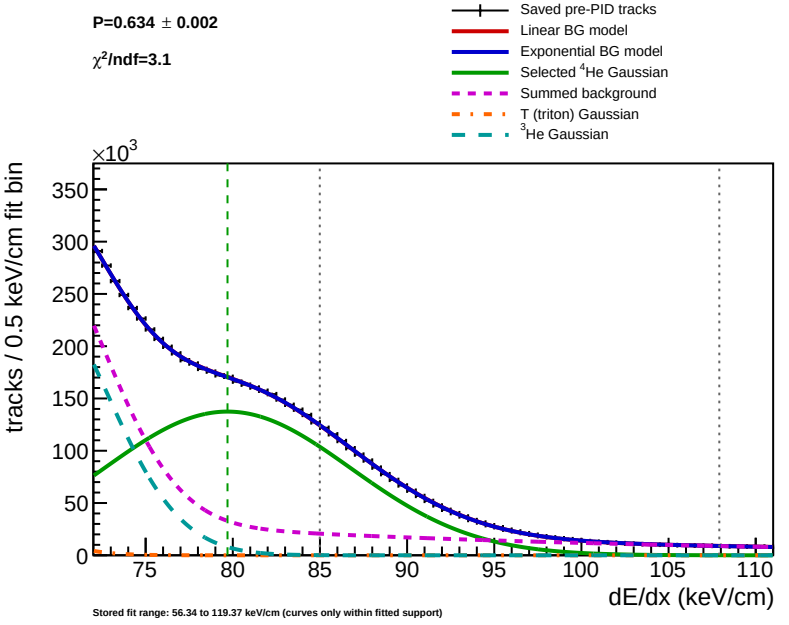

Stored fit range: 56.34 to 119.37 keV/cm (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.45-0.46 GeV/c [log]

P=0.638 ± 0.002

χ^2/ndf=2.7

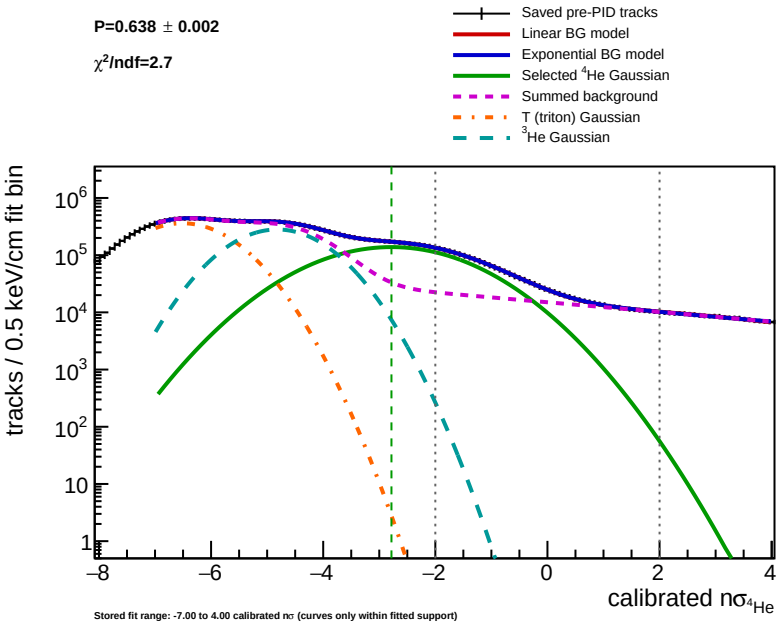

Stored fit range: -7.00 to 4.00 calibrated nσ (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.45-0.46 GeV/c [linear]

P=0.638 ± 0.002

χ^2/ndf=2.7

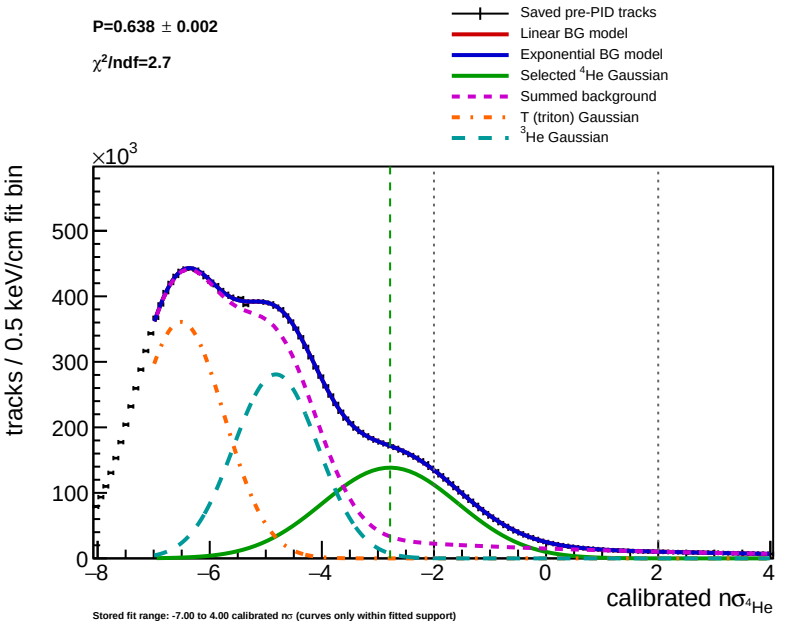

Stored fit range: -7.00 to 4.00 calibrated nσ (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.45-0.46 GeV/c [log]

P=0.638 ± 0.002

χ^2/ndf=2.7

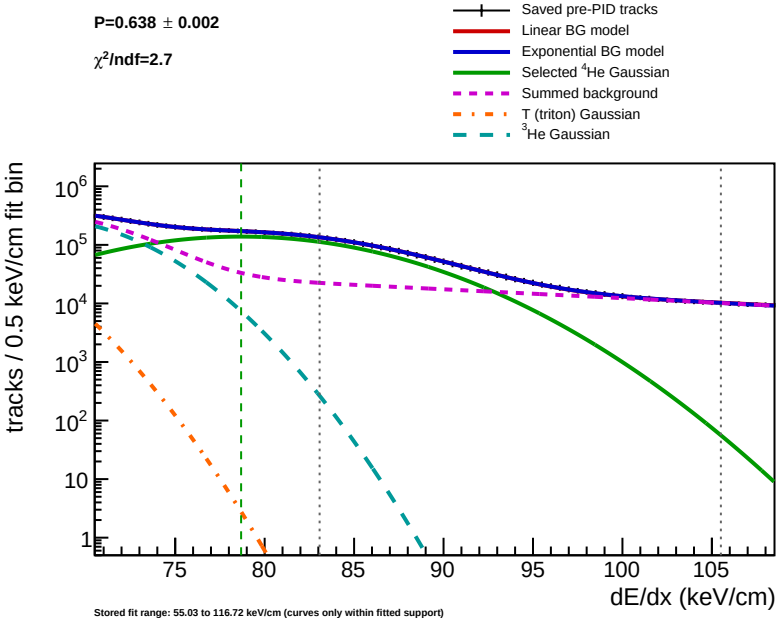

Stored fit range: 55.03 to 116.72 keV/cm (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.45-0.46 GeV/c [linear]

P=0.638 ± 0.002

χ^2/ndf=2.7

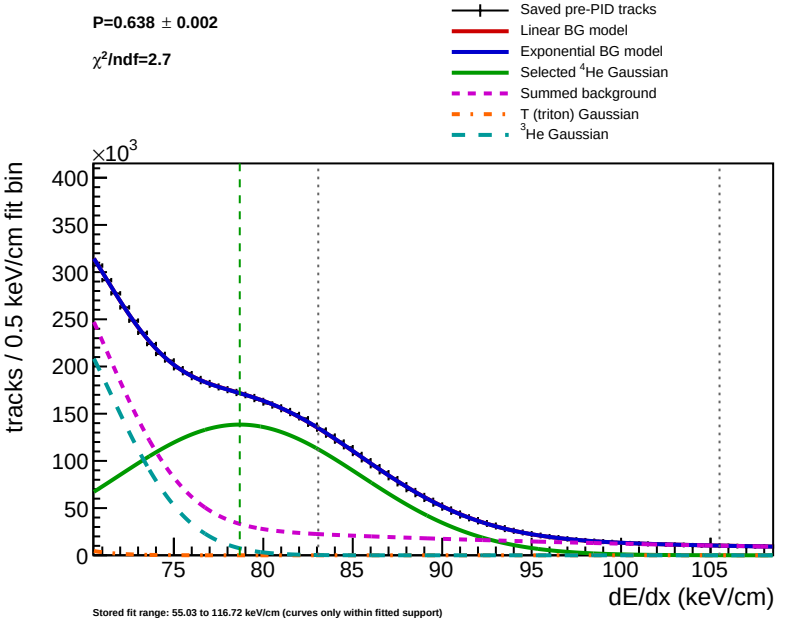

Stored fit range: 55.03 to 116.72 keV/cm (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.47-0.48 GeV/c [log]

P=0.649 ± 0.002

χ^2/ndf=2.8

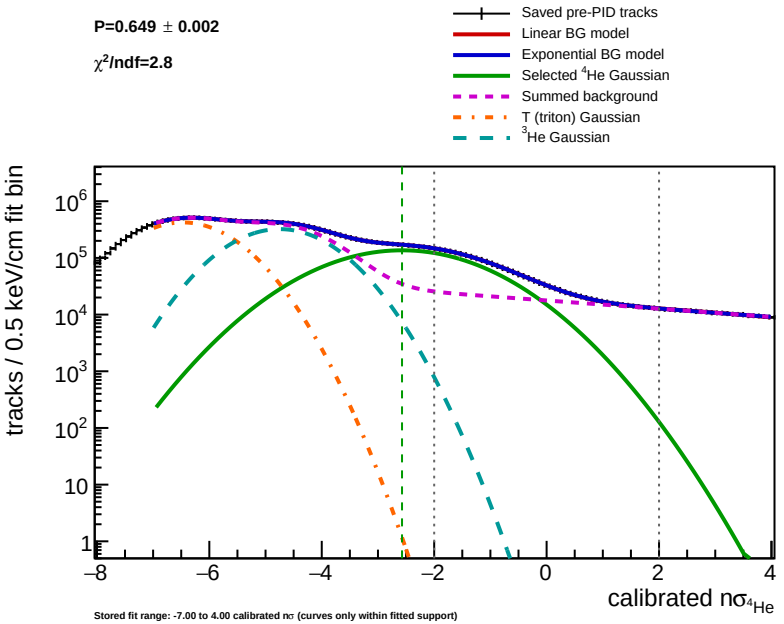

Stored fit range: -7.00 to 4.00 calibrated nσ (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.47-0.48 GeV/c [linear]

P=0.649 ± 0.002

χ^2/ndf=2.8

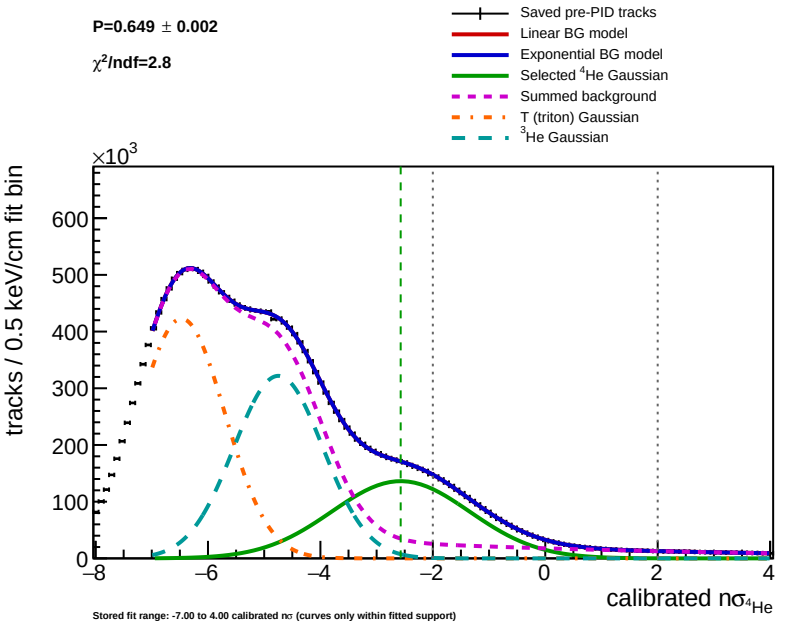

Stored fit range: -7.00 to 4.00 calibrated nσ (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.47-0.48 GeV/c [log]

P=0.649 ± 0.002

χ^2/ndf=2.8

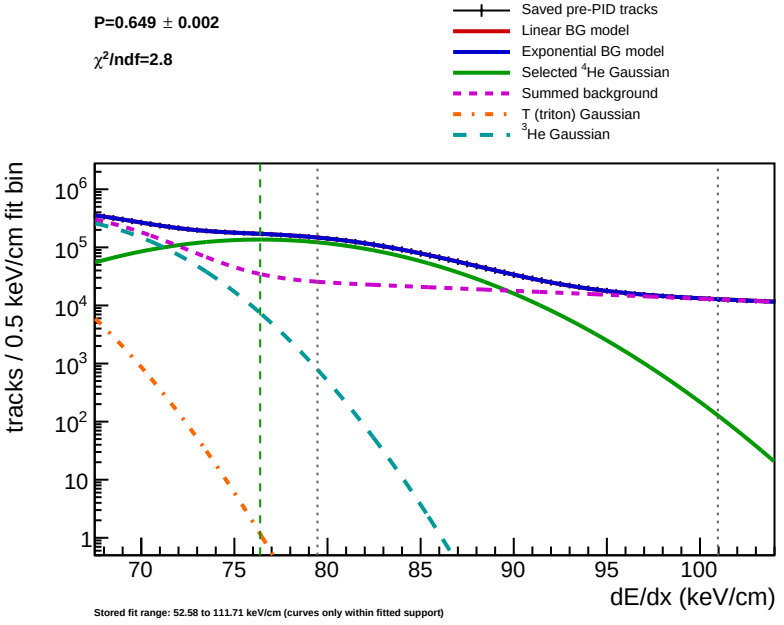

Stored fit range: 52.58 to 111.71 keV/cm (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.47-0.48 GeV/c [linear]

P=0.649 ± 0.002

χ^2/ndf=2.8

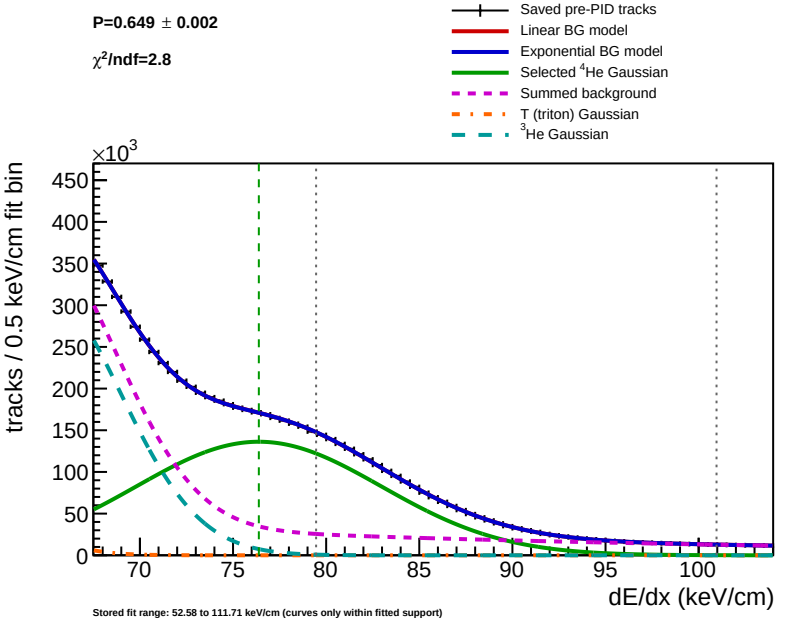

Stored fit range: 52.58 to 111.71 keV/cm (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.49-0.50 GeV/c [log]

P=0.637 ± 0.002 [poor fit]

χ^2/ndf=8.8

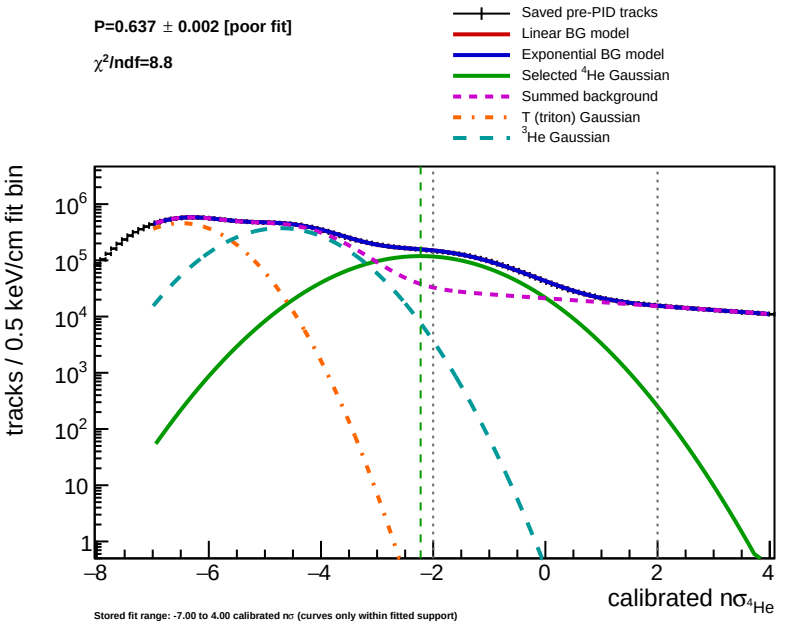

Stored fit range: -7.00 to 4.00 calibrated nσ (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.49-0.50 GeV/c [linear]

P=0.637 ± 0.002 [poor fit]

χ^2/ndf=8.8

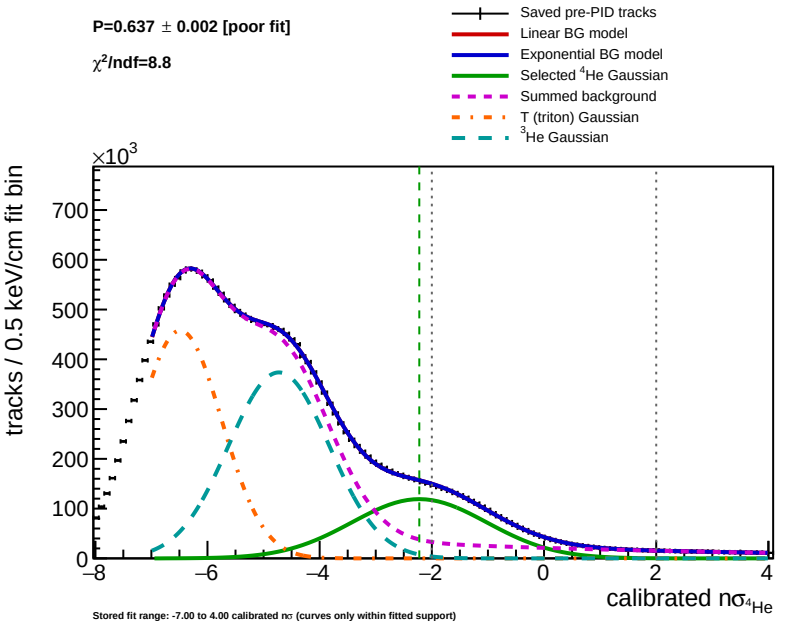

Stored fit range: -7.00 to 4.00 calibrated nσ (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.49-0.50 GeV/c [log]

P=0.637 ± 0.002 [poor fit]

χ^2/ndf=8.8

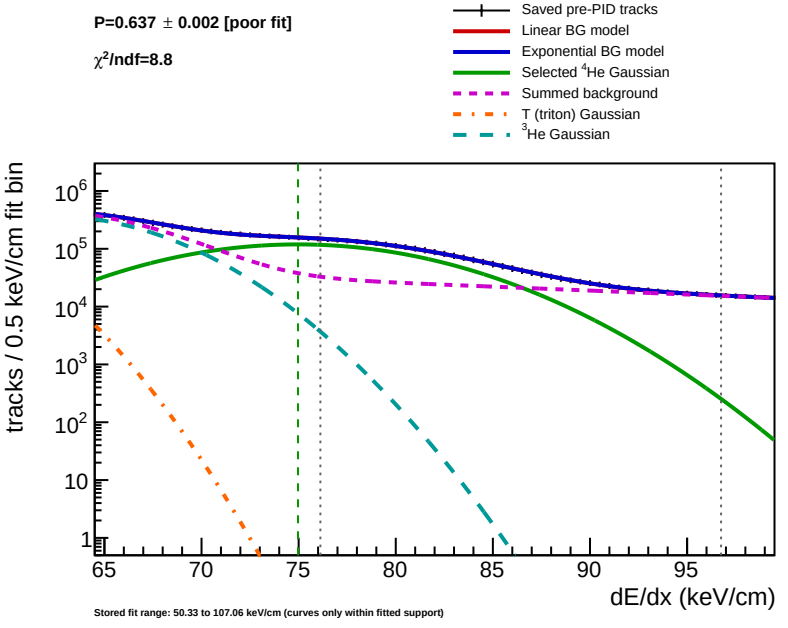

Stored fit range: 50.33 to 107.06 keV/cm (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.49-0.50 GeV/c [linear]

P=0.637 ± 0.002 [poor fit]

χ^2/ndf=8.8

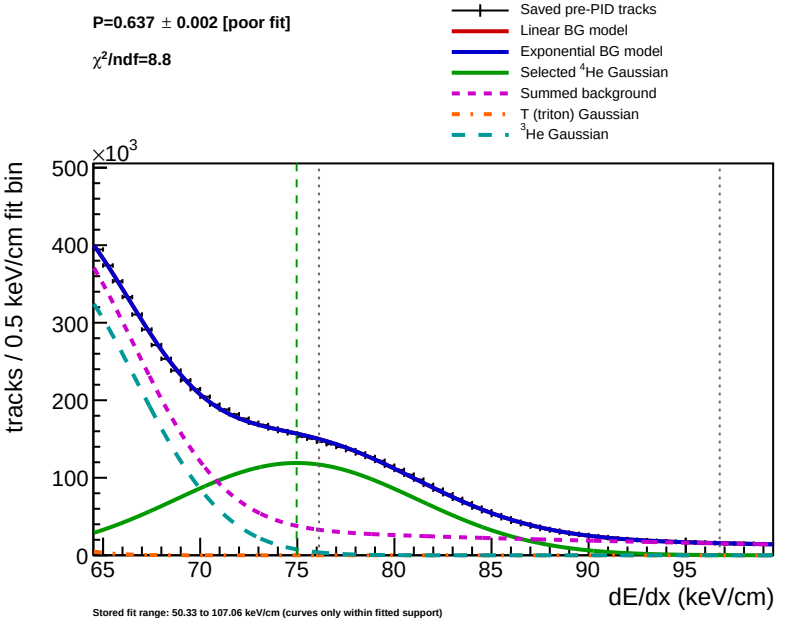

Stored fit range: 50.33 to 107.06 keV/cm (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.50-0.51 GeV/c [log]

P=0.626 ± 0.002 [poor fit]

χ^2/ndf=14.6

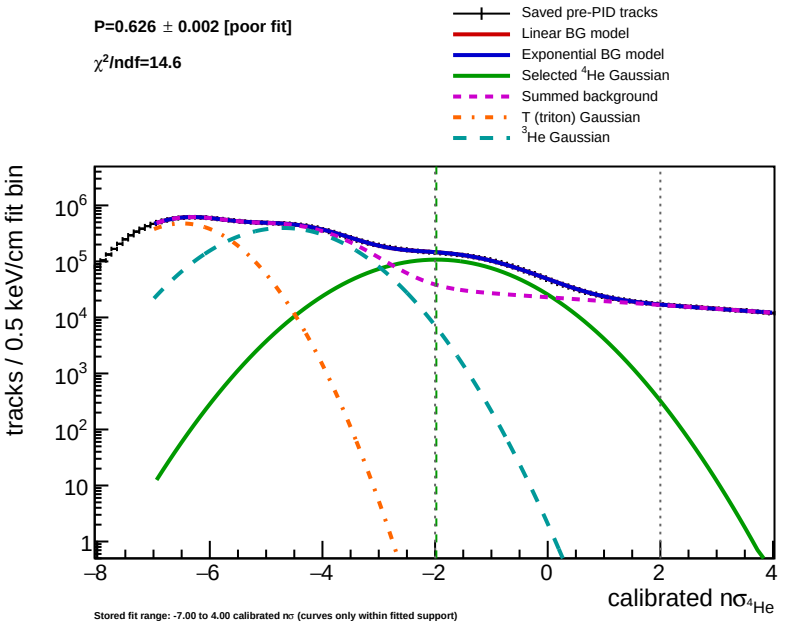

Stored fit range: -7.00 to 4.00 calibrated nσ (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.50-0.51 GeV/c [linear]

P=0.626 ± 0.002 [poor fit]

χ^2/ndf=14.6

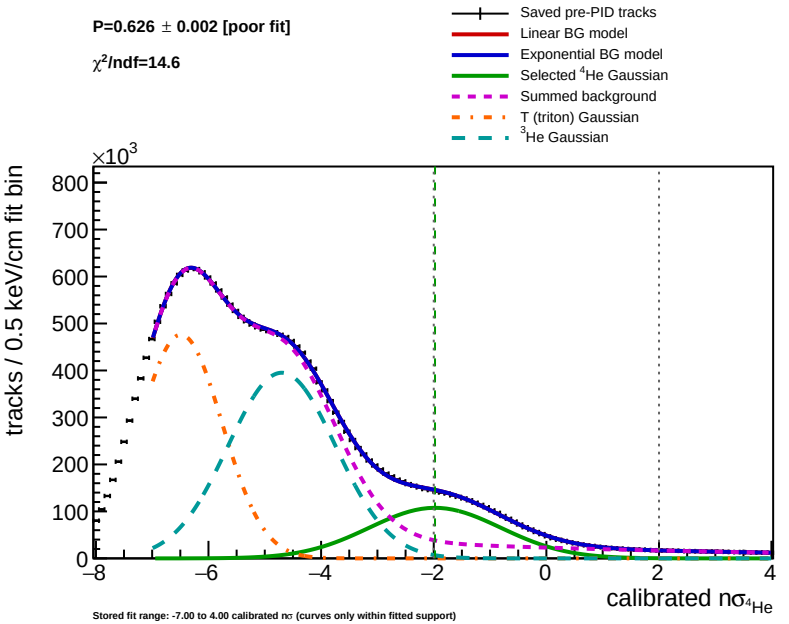

Stored fit range: -7.00 to 4.00 calibrated nσ (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.50-0.51 GeV/c [log]

P=0.626 ± 0.002 [poor fit]

χ^2/ndf=14.6

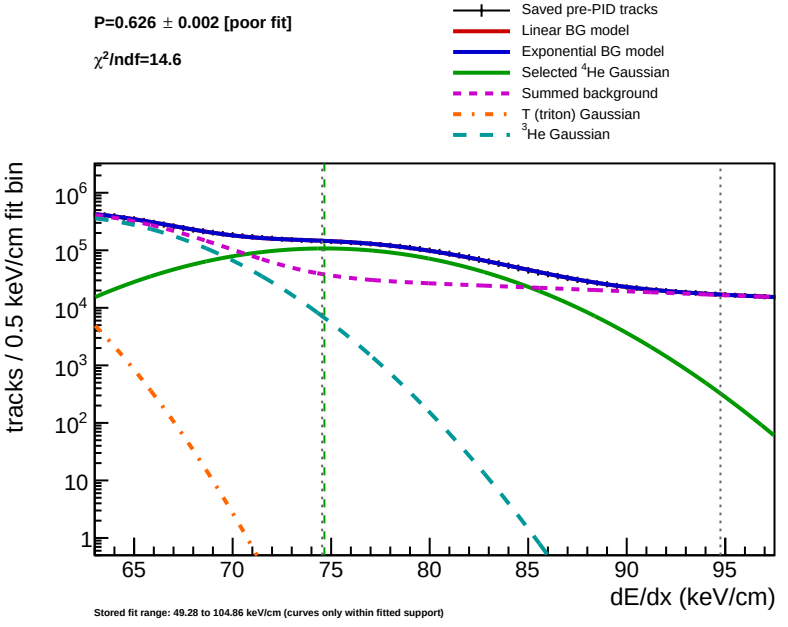

Stored fit range: 49.28 to 104.86 keV/cm (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.50-0.51 GeV/c [linear]

P=0.626 ± 0.002 [poor fit]

χ^2/ndf=14.6

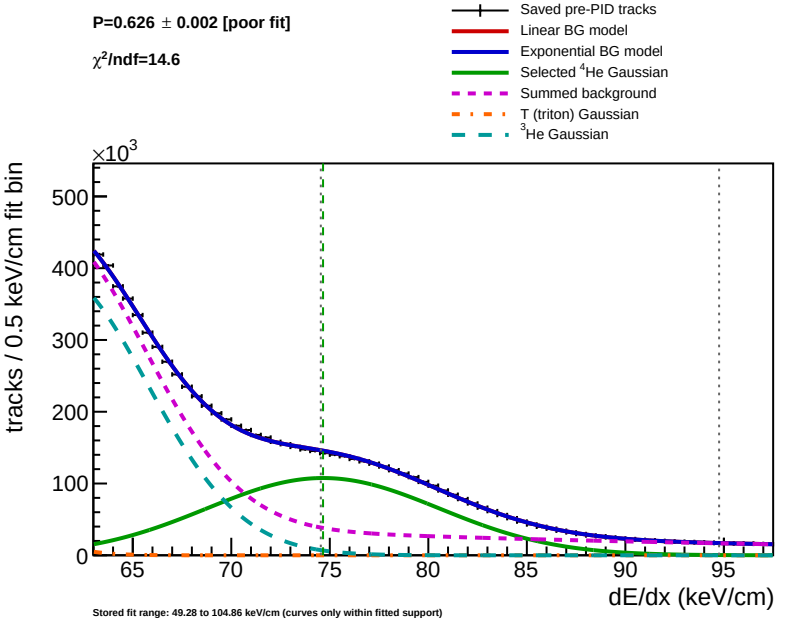

Stored fit range: 49.28 to 104.86 keV/cm (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.55-0.56 GeV/c [log]

P=0.434 ± 0.005 [poor fit]

χ^2/ndf=30.6

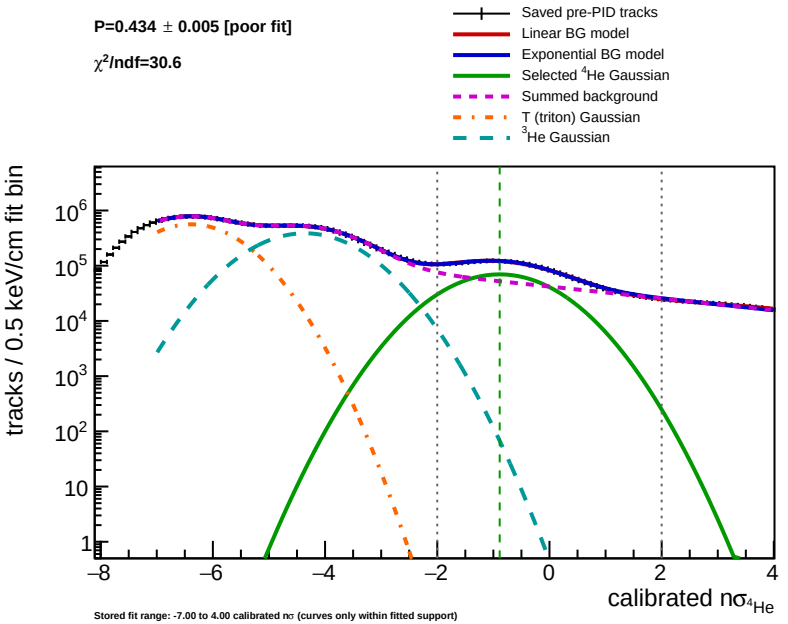

Stored fit range: -7.00 to 4.00 calibrated nσ (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.55-0.56 GeV/c [linear]

P=0.434 ± 0.005 [poor fit]

χ^2/ndf=30.6

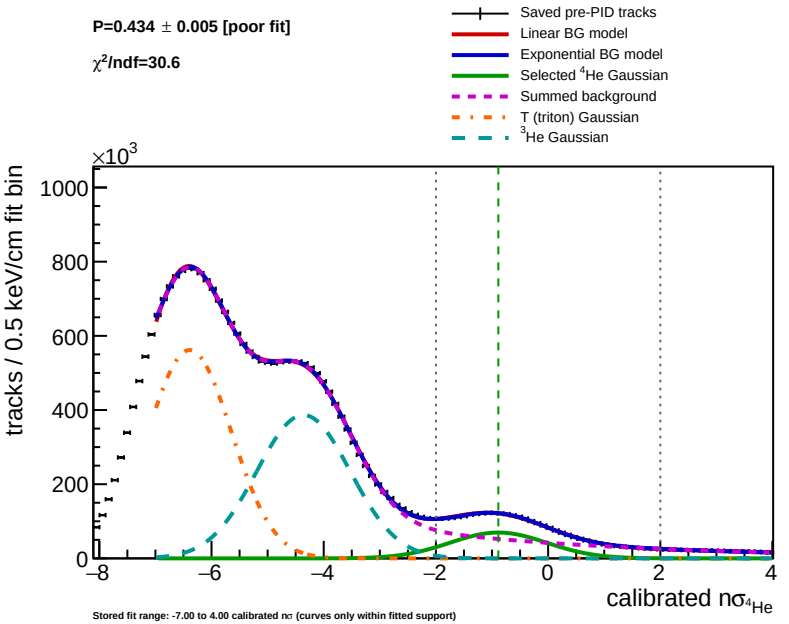

Stored fit range: -7.00 to 4.00 calibrated nσ (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.55-0.56 GeV/c [log]

P=0.434 ± 0.005 [poor fit]

χ^2/ndf=30.6

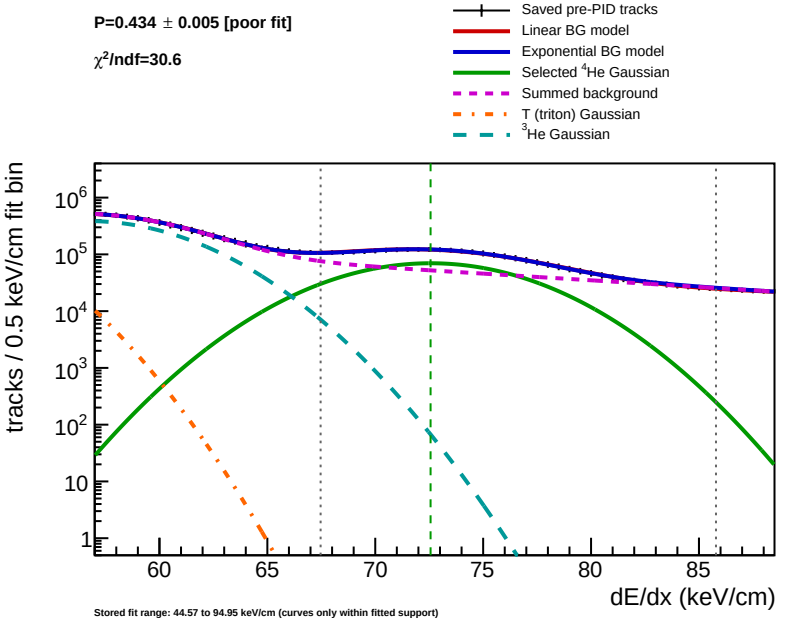

Stored fit range: 44.57 to 94.95 keV/cm (curves only within fitted support)


Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm

Au+Au FXT: 3.85 GeV beam energy | 2021 P24iy | inclusive accepted events

R=0.55-0.56 GeV/c [linear]

P=0.434 ± 0.005 [poor fit]

χ^2/ndf=30.6

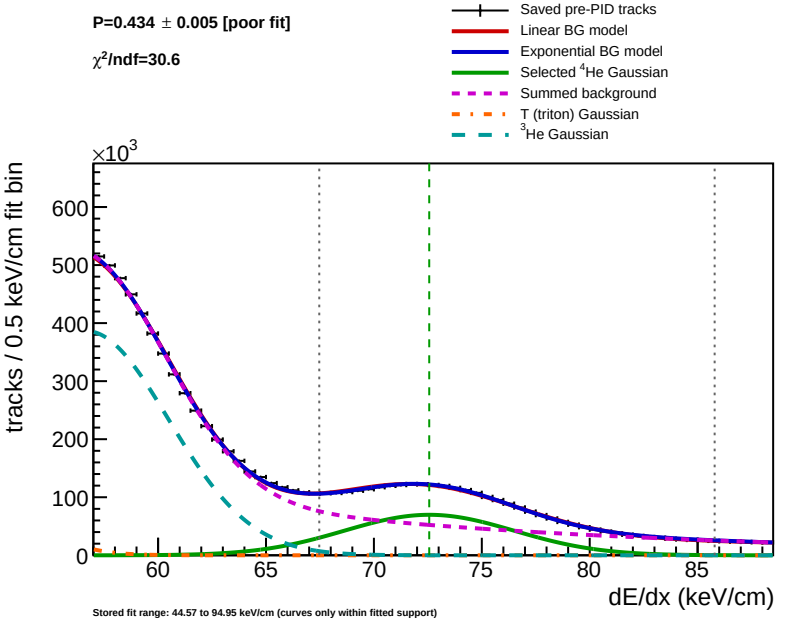

Stored fit range: 44.57 to 94.95 keV/cm (curves only within fitted support)

Gray: original calibration gate; dE/dx fit bin = 0.5 keV/cm