


## AST-1732MR-R 17mm Speaker


3541 Stop Eight Road • Dayton, Ohio 45414

### Product Overview

- 17mm diameter speaker with Neodymium magnet for 90 dB sensitivity
- 0.2W continuous, 0.5W maximum power handling and 32Ω impedance
- Mylar cone for wide frequency response
- Thru hole design and wave solderable for PCB mount

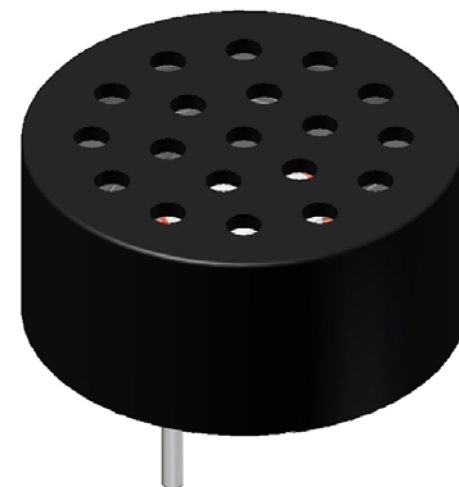

Frequency Response (0.2W @ 0.1 meter)

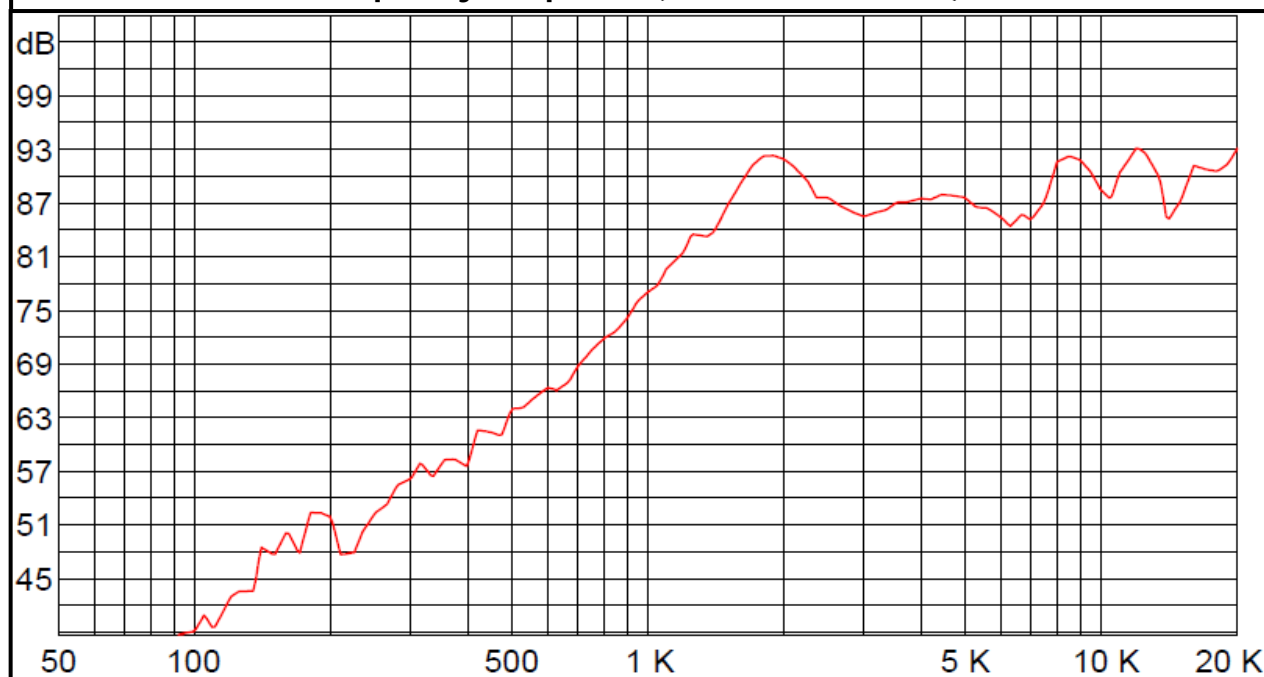

Audio Products Division




## AST-1732MR-R 17mm Speaker

### Mechanical and Environment Testing

Test Description	Test Condition
High Temperature	55°C with random humidity for 96 hours
Low Temperature	-20°C with random humidity for 96 hours
Humidity	40°C with 90% to 95% relative humidity for 96 hours
Vibration	1.5 mm movement modulated at 10 to 55 Hz for 2 hours
Drop Test	75 cm free fall onto 40 mm thick board, 10 cy-
Temperature Cycle Test	-20°C to 55°C, 5 cycles (refer to Temperature Cycle Test Graph)


After tests, speaker shall rest for 1 hours. SPL shall not deviate  $\pm 3$  dB from pre-test measurement.

### Temperature Cycle Test Graph


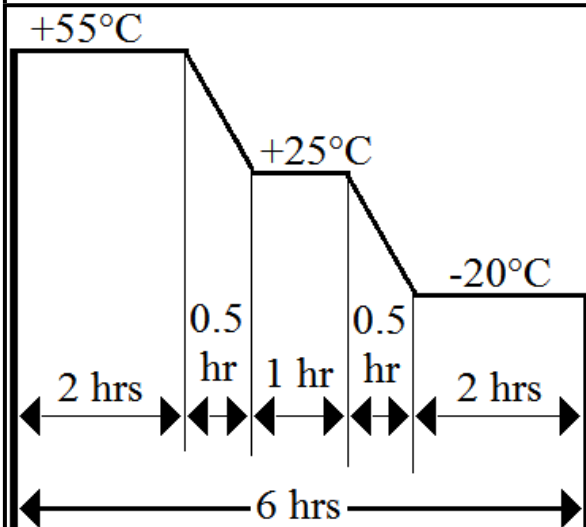


### Wave Solder Profile

- Preheat temperature: Max 100° less than 80 seconds
- Soldering bath temperature 250°C (lead)/265°C (lead-free alloy)
- Wave soldering cycle time: 4 sec. (single wave), 6 sec. (dual wave)

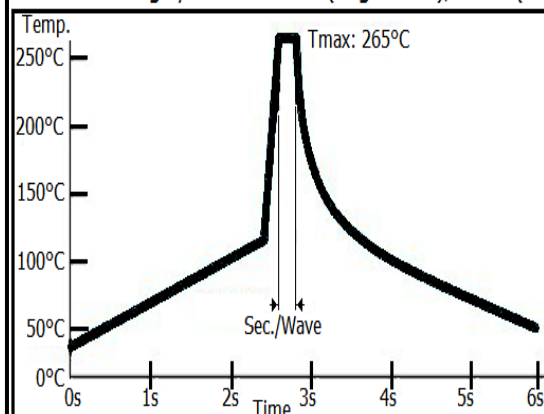

### Packaging Information

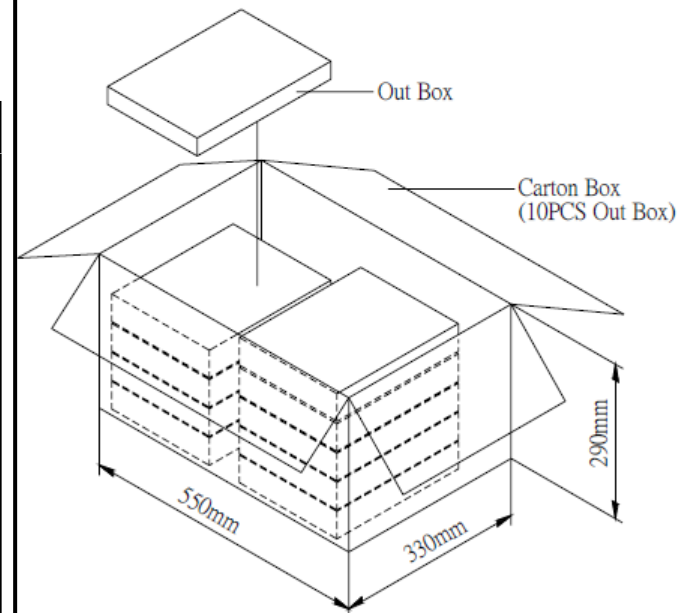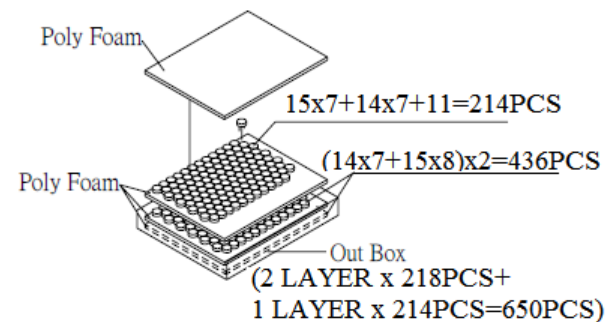

Outer Box	310mmx248mmx49mm	1x650PCS=650PCS
Carton	550mmx330mmx290mm	650PCSx10=6,500PCS




## SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED INPUT POWER	0.2	W
MAX INPUT POWER	0.5	W
IMPEDANCE (3Khz @ 1V)	32 ± 15%	OHM
OUTPUT SPL @ 0.2W/0.1M (AT 2.0, 2.5, 3.0, 4.0 kHz)	90 ± 3	dBA
DISTORTION (MAX.)	10%	-
RESONANT FREQUENCY	1,800 ± 20%	Hz
FREQUENCY RANGE	1,700 ~ 20,000	Hz
HOUSING MATERIAL	PBT	-
CONE MATERIAL	MYLAR	-
MAGNET MATERIAL	Nd-Fe-B	-
OPERATING TEMPERATURE	-20 ~ +55	°C
WEIGHT	2.9	grams

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.  
©2003, Projects Unlimited Inc.


## REVISION HISTORY

LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	3/29/2006	
A	REVISED IMPEDANCE & FREQUENCY	11/20/2006	B.R.
B	ADDED OVERALL HEIGHT DIMENSION	2/25/2009	B.R.
C	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	2/26/2009	B.R.

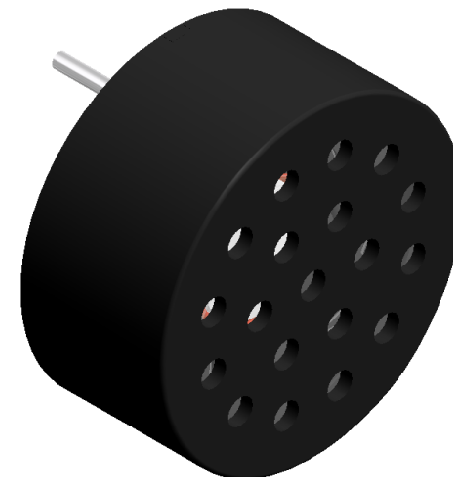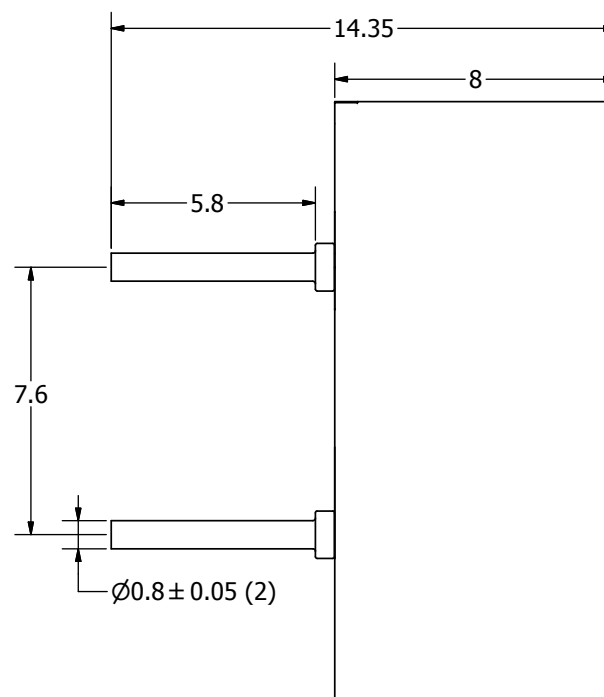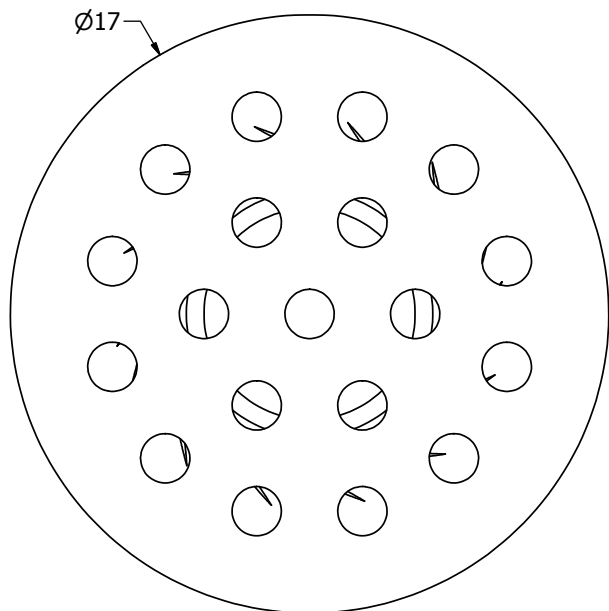

### NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

UNLESS OTHERWISE SPECIFIED:  DIMENSIONS ARE IN MILLIMETERS,  TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.	SIZE  <b>A3</b>	Designed by	Date	Checked by	Date	Approved by	Date	Drawn Date
		B.R.	3/29/2006	B.R.	3/29/2006	E.P.	3/29/2006	2/24/2009
	AST-1732MR-R.idw		 <b>pui audio</b> <sup>TM</sup> inc <small>a projects unlimited company</small>		AST-1732MR-R			
Speaker					Edition	Sheet		
				-				1 / 1

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[PUI Audio:](#)

[AST-1732MR-R](#)