


The Printable Watch

Assembly Guide


Printer Settings

Spend time dialling in your printer settings before proceeding. You must ensure that the prints are accurate, ideally down to 0.5mm tolerance. If you're printing out of tolerance, parts may not assemble together properly.

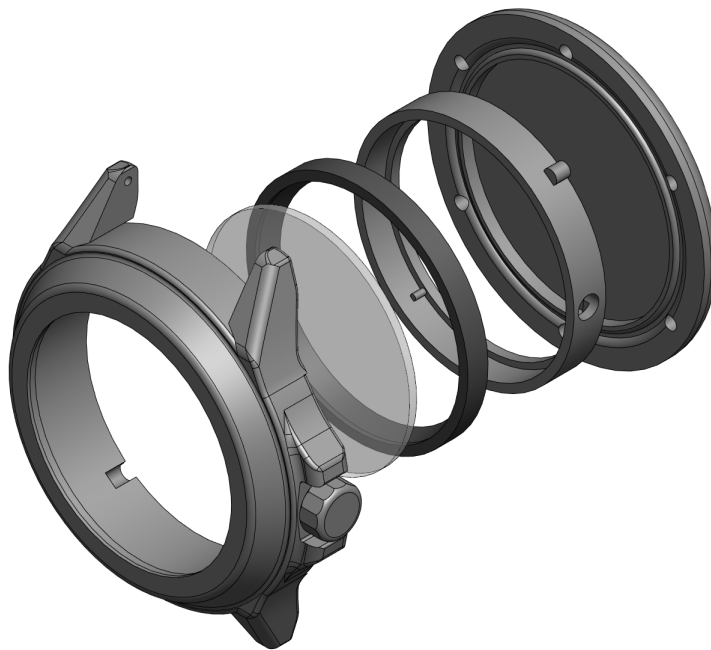

Watch Case and Case Back

Once you are happy with your printer settings in your chosen material, proceed to print the case in as high quality as possible.

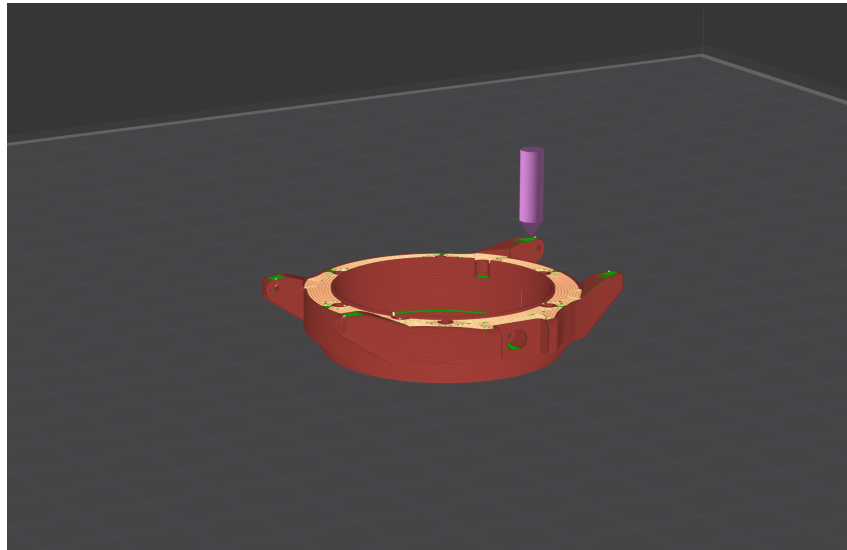

Once printed spend time removing any debris and stringing. Lightly use fine sand paper where necessary and use a sharp craft knife to remove stringing. Ideally you should dial your printer to minimize these as much as possible.

The case has been designed to be printed face (dial) down with no supports or brim.

Movement Bracket

Once printed remove any debris and stringing. Any debris from the part could end up in your movement causing issues down the line, spend time cleaning this part.


Glass Bracket

There are two options for this part. You can either print this so that you can use a readily available NH35 Chapter ring or you can print a part that incorporates a chapter ring (with not markings)

Crown

Once printed, insert into the printed case and twist multiple times, until it turns in the case with ease. It's easier to do this before final assembly begins.

Ensure that the seam is in the same place, the smallest section of the crown should be two walls thick.

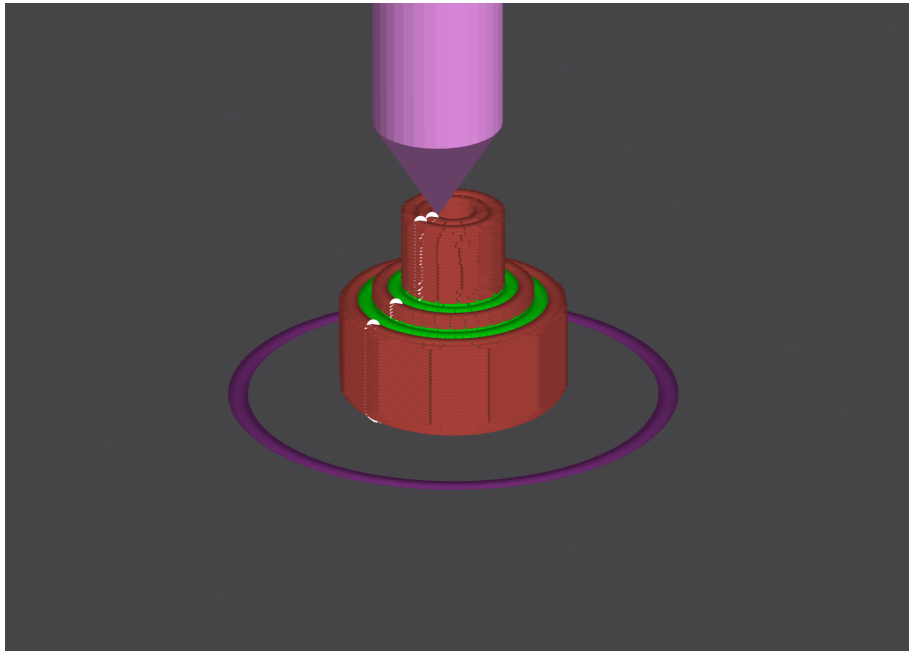

Pressing Glass

Carefully insert glass so that it is in on one side and stuck in the case. Using the glass press and a soft surface, increase the pressure on the glass focusing on the area when the glass is not fitted. Gradually increase the pressure on the glass. It will click into place if done properly.

Spend some time cleaning the glass from the inside of the watch. This is easier before the next step.

Installing Glass Bracket (and chapter ring)

The glass bracket should slide into place with some resistance but not be impossible. It should not be able to fall out.

If you are installing a chapter ring, insert now and ensure it is correctly positioned.


Assembling Movement

Remove pins from the back of the dial that corresponds to the movement. There should only be two pins.

Gently push dial onto movement. It should snugly fit without being forced.



Install Hands, this is by far the most difficult stage in my opinion. There is a wealth of knowledge online, especially youtube for installing hand. Take you time, especially with the seconds hand, this will take a while to line up and push on perfect.

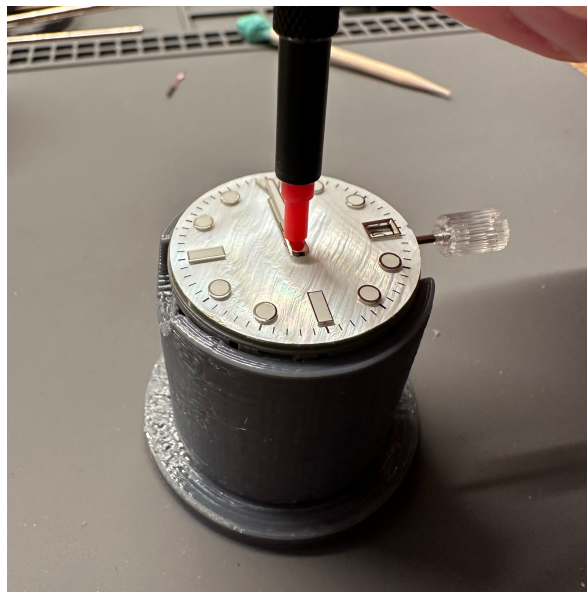

Once the hands are on insert into movement bracket. This has been designed to fit one way only.

Assemble Case

Place the glazed case and place over the movement, it should slide on and align with the markers.

Check for dust and debris

Check for alignment

Stem and Crown

Start by threading crown with stem and pliers

- Check depth of crown thread, should be 4.5mm, careful not to overtighten
- Insert crown and stem into case and movement

- Measure distance between case and crown
- Remove stem and crown
- Cut stem to length
- Reinstall crown for final test
- If happy with length, remove from movement, remove crown and glue using Loctite or similar, once dry, insert into case to confirm length. Then leave to set.

Once the stem and case have been assembled, insert the stem into the movement. Screw the case back onto the case.