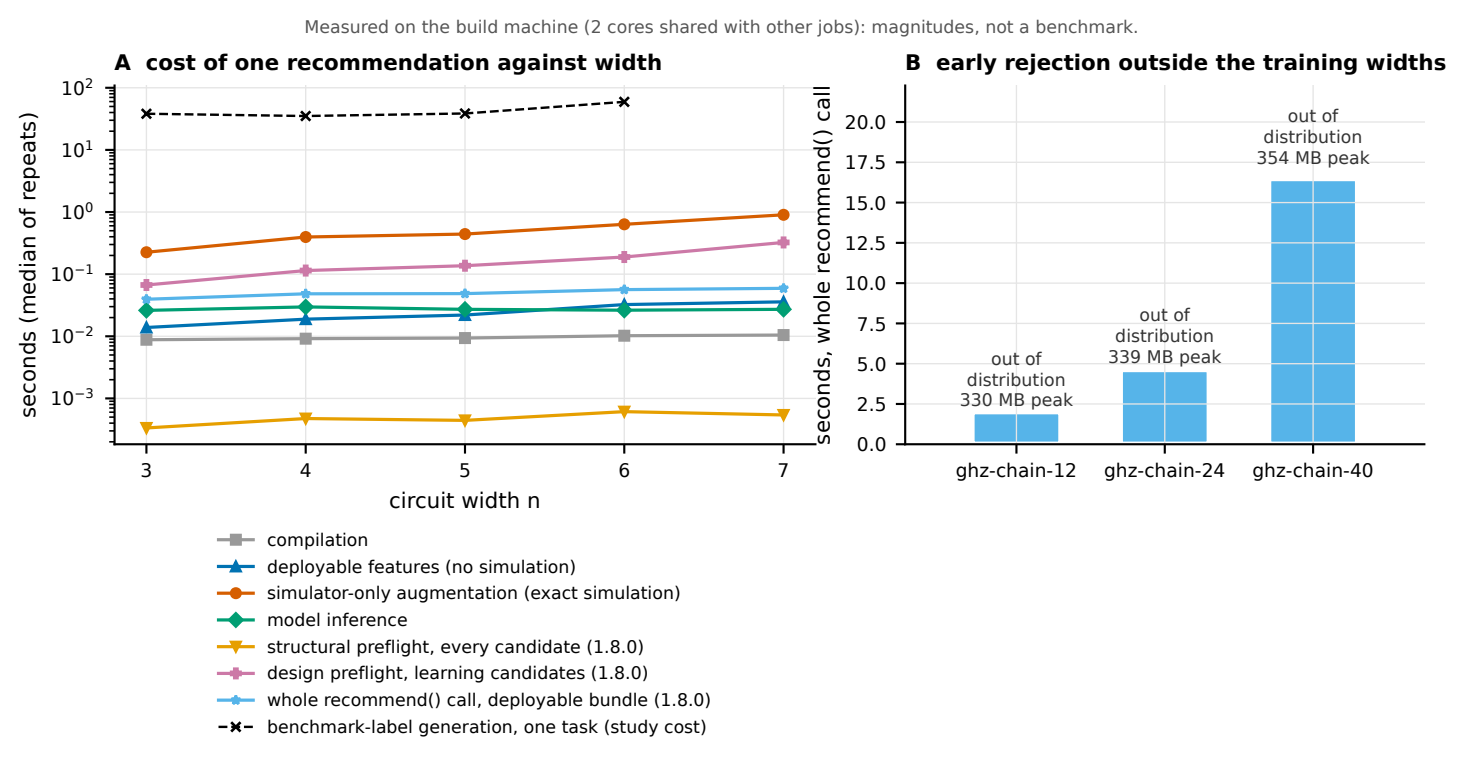
Measured on the build machine (2 cores shared with other jobs): magnitudes, not a benchmark.
A cost of one recommendation against width
seconds (median of repeats)
circuit width n
B early rejection outside the training widths
seconds, whole recommend() call
out of distribution 330 MB peak
out of distribution 339 MB peak
out of distribution 354 MB peak
ghz-chain-12
ghz-chain-24
ghz-chain-40
compilation
deployable features (no simulation)
simulator-only augmentation (exact simulation)
model inference
structural preflight, every candidate (1.8.0)
design preflight, learning candidates (1.8.0)
whole recommend() call, deployable bundle (1.8.0)
benchmark-label generation, one task (study cost)