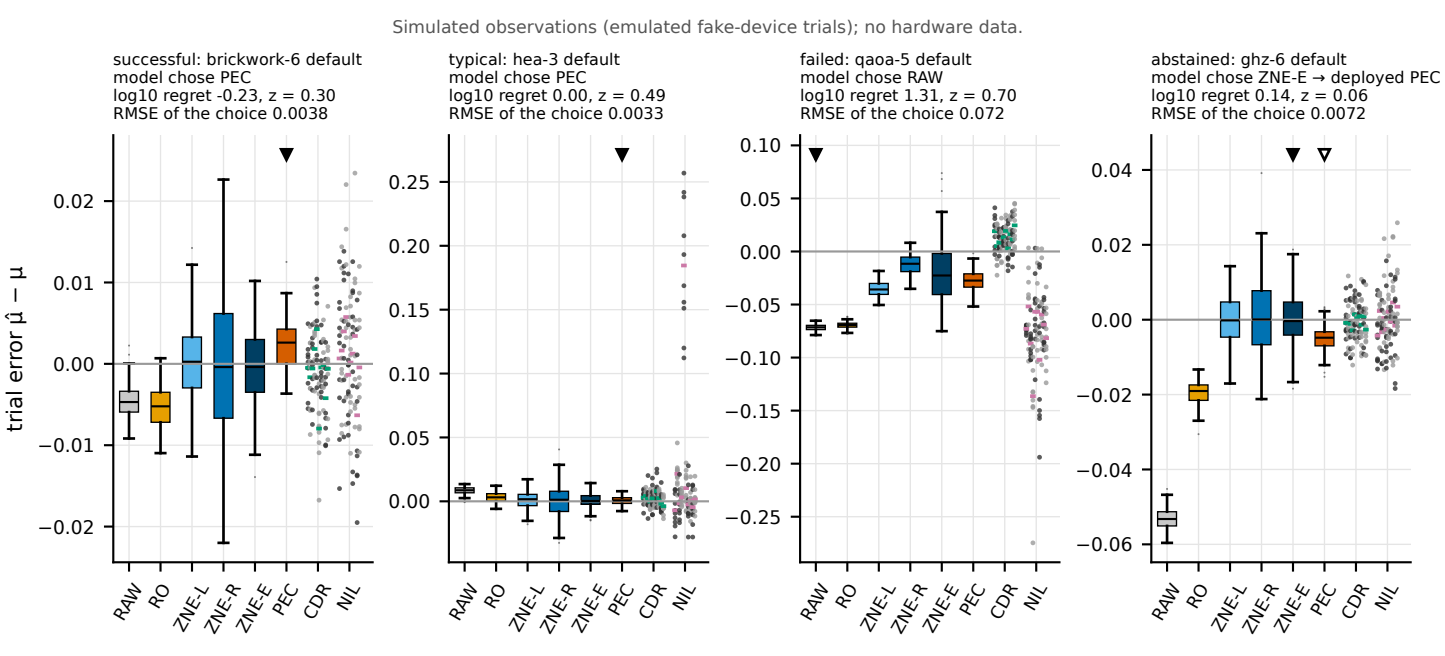

Simulated observations (emulated fake-device trials); no hardware data.
successful: brickwork-6 default
model chose PEC
log10 regret -0.23, z = 0.30
RMSE of the choice 0.0038
typical: hea-3 default
model chose PEC
log10 regret 0.00, z = 0.49
RMSE of the choice 0.0033
failed: qaoa-5 default
model chose RAW
log10 regret 1.31, z = 0.70
RMSE of the choice 0.072
abstained: ghz-6 default
model chose ZNE-E → deployed PEC
log10 regret 0.14, z = 0.06
RMSE of the choice 0.0072
trial error μ̂ − μ
RAW
RO
ZNE-L
ZNE-R
ZNE-E
PEC
CDR
NIL