Simulated observations (emulated fake-device trials); no hardware data.

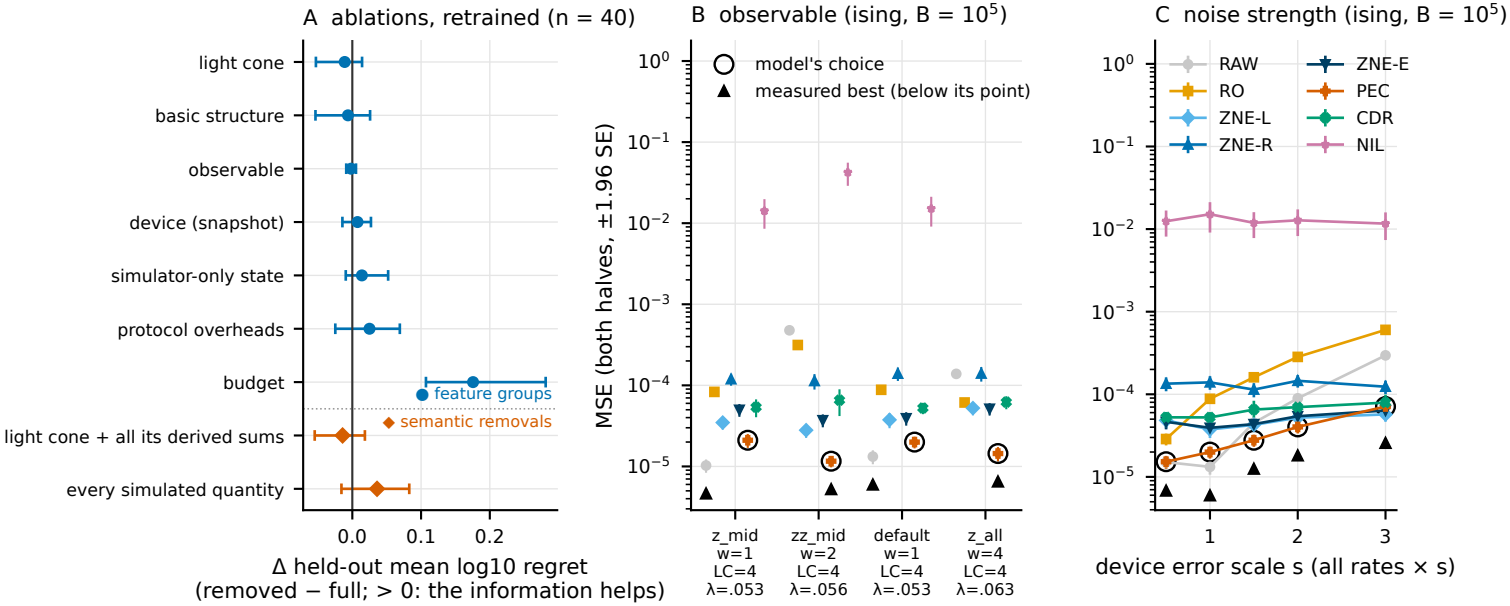

D noise composition: measured best protocol, one component changed at a time (B = 10^5;
fill: best protocol; λ: total fault weight; model: the frozen model's choice; ✗ (corner): it differs)

	baseline	1q gates ×3	2q gates ×2	2q gates ×3	T1, T2 ÷2	T1, T2 ÷3	readout ×2	readout ×0.5	coherent 25 %	coherent 50 %
ising (n=4)	**RAW** ✗ λ=0.06 model PEC	**PEC** λ=0.08 model PEC	**PEC** λ=0.11 model PEC	**PEC** λ=0.15 model PEC	**RAW** ✗ λ=0.08 model PEC	**RAW** ✗ λ=0.09 model PEC	**PEC** λ=0.06 model PEC	**PEC** λ=0.06 model PEC	**RO** ✗ λ=0.06 model PEC	**RO** ✗ λ=0.06 model PEC
hea (n=4)	**PEC** λ=0.03 model PEC	**ZNE-L** ✗ λ=0.05 model PEC	**PEC** λ=0.06 model PEC	**ZNE-L** ✗ λ=0.08 model PEC	**PEC** λ=0.04 model PEC	**CDR** ✗ λ=0.05 model PEC	**PEC** λ=0.03 model PEC	**PEC** λ=0.03 model PEC	**ZNE-E** ✗ λ=0.03 model PEC	**ZNE-E** ✗ λ=0.03 model PEC
qaoa (n=4)	**PEC** λ=0.07 model PEC	**PEC** λ=0.09 model PEC	**PEC** λ=0.12 model PEC	**PEC** λ=0.17 model PEC	**ZNE-L** ✗ λ=0.08 model PEC	**ZNE-L** ✗ λ=0.10 model PEC	**PEC** λ=0.07 model PEC	**PEC** λ=0.07 model PEC	**ZNE-E** ✗ λ=0.07 model PEC	**ZNE-L** ✗ λ=0.07 model PEC

▨ top two unresolved (within 1.96 SE of their difference)