



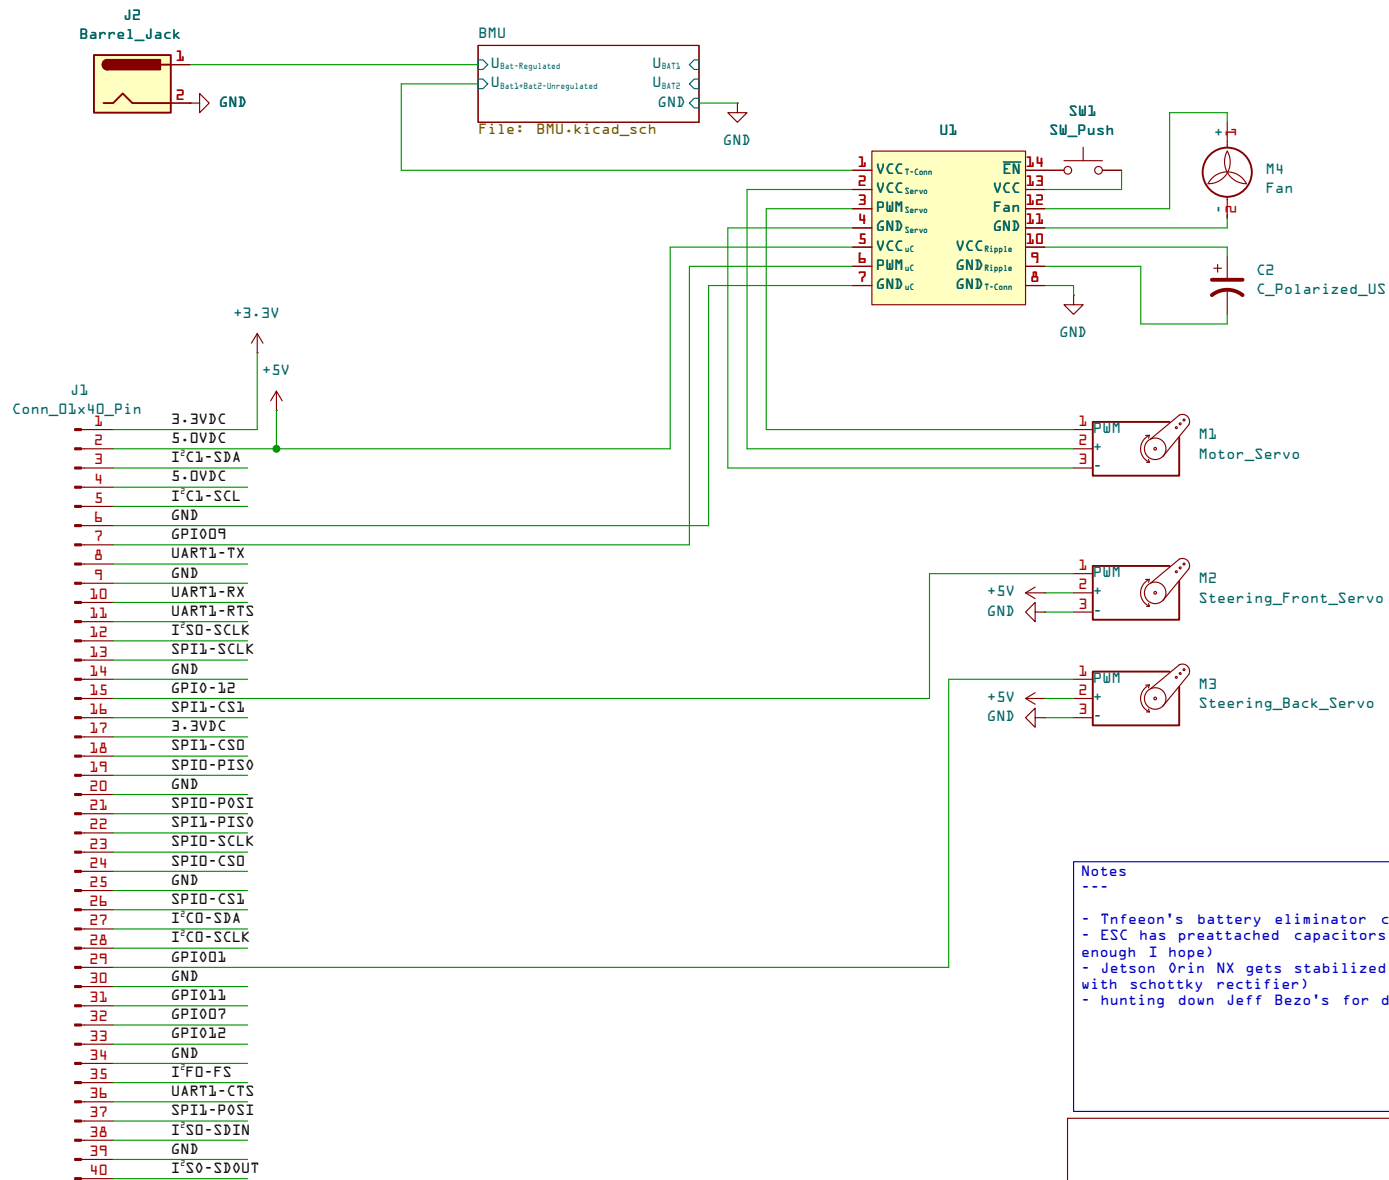

Notes

- Infineon's battery eliminator circuit (BEC) keeps U_{servo} at 5.8V
- ESC has preattached capacitors against voltage ripple (no idea how much C_1 enough I hope)
- Jetson Orin NX gets stabilized 5V-6.1V (P-Channel Mosfet, standard automotive with schottky rectifier)
- hunting down Jeff Bezo's for datasheets rn

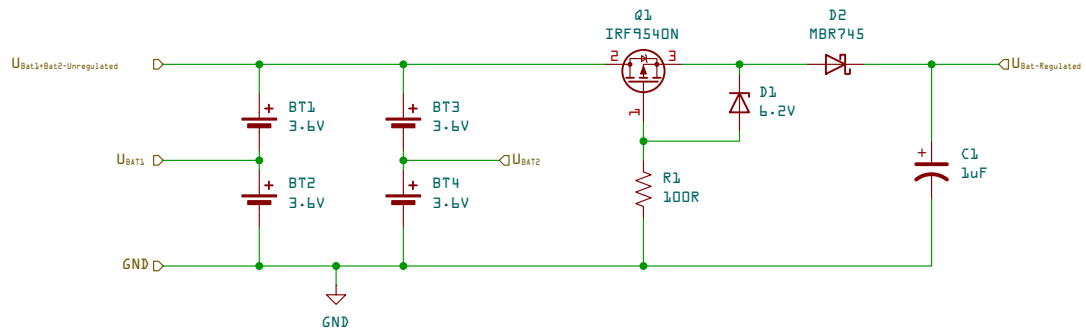

Notes

- if U_{Bat} dips below 4V, P-MOSFET turns on --> schottky diode blocks reversed current flow
 - U_{Bat1} , U_{Bat2} needed by battery charger
 ! current issue: Jetson Orin NX accepts 5VDC-20VDC through barrel plug
 --> DC/DC buck converter could smooth voltage ripple caused by ESC but requires higher battery voltage (currently at 7.2V)
 = either increase battery voltage for buck converter or add capacitors for voltage ripple
 = gamble for now and use P-Mosfet supply with 1uF cap, MBR745 with $U_{Forward-Max} = 0.75V$

Sheet: /BMU/
 File: BMU.kicad_sch

Title:

Size: A4	Date:	Rev:
KiCad E.D.A. 10.0.4		Id: 2/2