

BT8812

Audio Player Microcontroller User Manual

Versions: 0.0.3

2018/09/28

Declaration

Copyright © 2018, www.bluetrum.com.

All Rights Reserved. No Unauthorized Distribution.

Bluetrum reserves the right to make changes without further notice to any products herein to improve reliability, function or design.

For further information on the technology, product and business term, please contact Bluetrum Company.

For sales or technical support, please send email to the address:

Sales: sales@bluetrum.com

Technical: project@bluetrum.com

Bluetrum Technology

Appendix I Revision History

Date	Version	Comments	Revised by
2018-08-21	0.0.1	First draft	Leo
2018-09-11	0.0.2	Update uart0baud description	Leo
2018-09-28	0.0.3	Remove package	Leo

Table of Contents

TABLE OF CONTENTS.....	3
1 PRODUCT OVERVIEW.....	5
1.1 INTRODUCE.....	5
1.2 FEATURES	6
2 INTERRUPTS	7
2.1 INTERRUPTS SPECIAL REGISTERS.....	8
3 GPIO MANAGEMENT	9
3.1 FEATURES	9
3.2 GPIO GENERAL CONTROL REGISTER	9
3.3 GPIO FUNCTION MAPPING	11
3.4 EXTERNAL PORT INTERRUPT WAKE UP	13
4 TIMER.....	15
4.1 FEATURES	15
4.2 TIMER0/1/2 SPECIAL FUNCTION REGISTERS	15
4.3 TIMER3/4/5 SPECIAL FUNCTION REGISTERS	16
5 PWM	18
5.1 FEATURES	18
5.2 SPECIAL FUNCTION REGISTERS.....	18
6 RTC	20
6.1 FEATURES	20
6.2 SPECIAL FUNCTION REGISTERS.....	20
6.3 INDEPENDENT POWER RTC REGISTERS.....	21
7 UART0	25
7.1 FEATURES	25
7.2 UART0 SPECIAL FUNCTION REGISTERS	25
7.3 USER GUIDE	26
8 SPI0	27
8.1 FEATURES	27
9 CHARACTERISTICS.....	28
9.1 PMU PARAMETERS.....	28
9.2 IO PARAMETERS	28
9.3 AUDIO DAC PARAMETERS	29


Table of content

9.4	AUDIO ADC PARAMETERS	29
9.5	BT PARAMETERS.....	29
9.6	CURRENT PARAMETERS	30

1 Product Overview

1.1 Introduce

BT8812 is a 32 bits RISC microcontroller. It integrates advanced digital and analog peripherals to audio player applications.

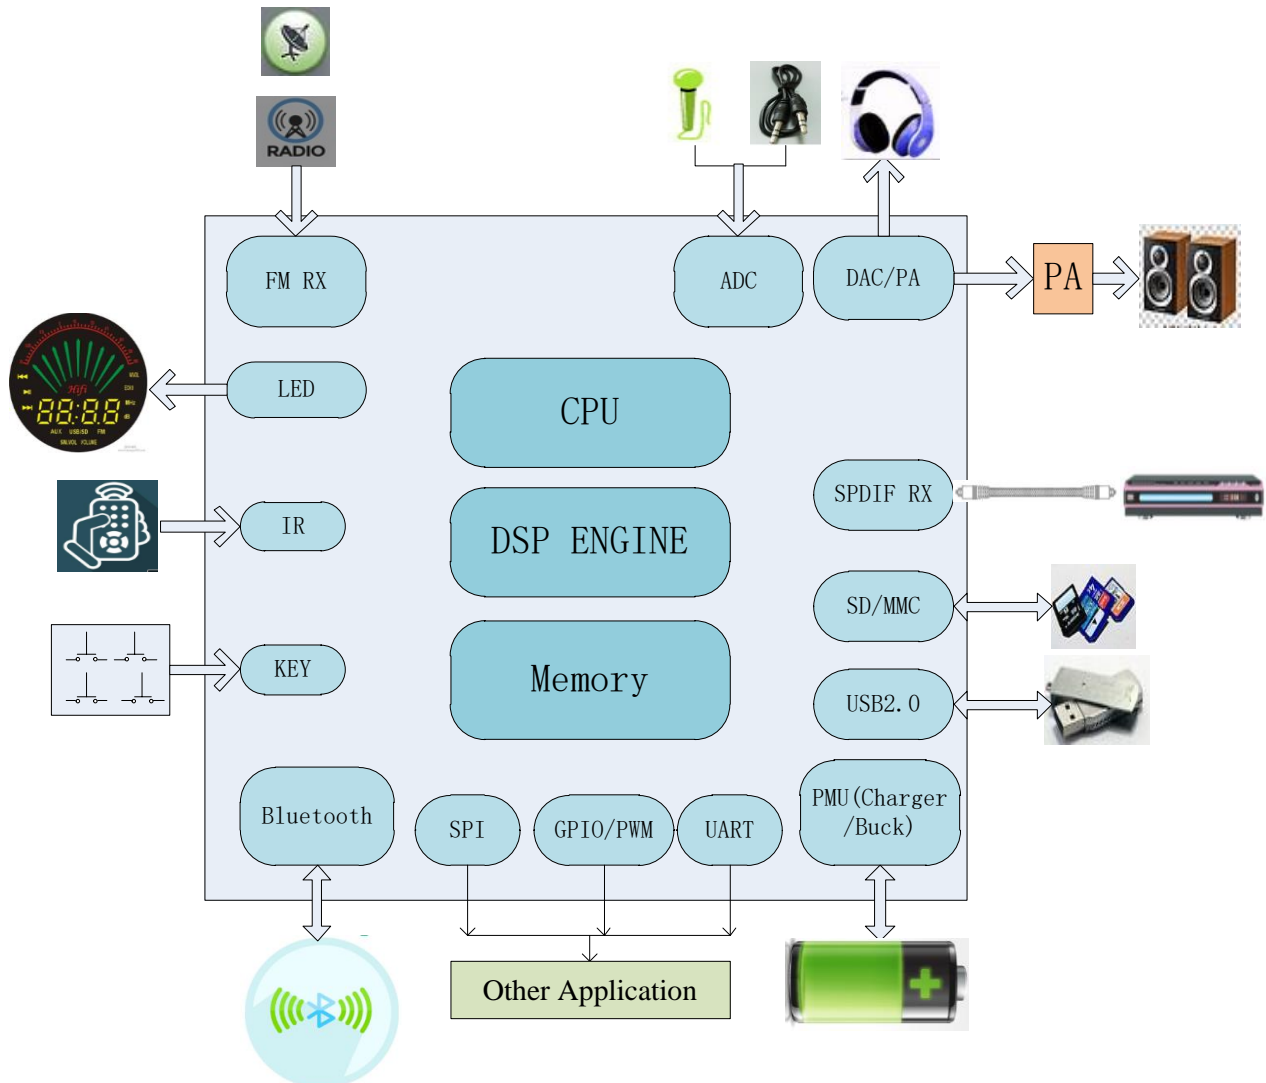

1.2 Features

CPU and Flexible IO

- ✚ 32bit High performance CPU with DSP instruction
- ✚ Flexible GPIO pins with Programmable pull-up and pull-down resistors;
- ✚ Support GPIO wakeup or interrupt;

Bluetooth Radio

- ✚ Compliant to Bluetooth 5.0 and BLE specification (QDID: [115952](#));
- ✚ TX output power +2db in typical;
- ✚ RX Sensitivity with -90.5dBm @Basic Rate;

FM Tuner

- ✚ Support frequency band 76~108MHz;
- ✚ Auto search tuning;
- ✚ Programable de-emphasis(50/75uS);
- ✚ Receive signal strength indicator (RSSI);

Audio Interface

- ✚ Audio codec with 16bit stereo DAC and two channel 16bit ADC;
- ✚ Support flexible audio EQ adjust;
- ✚ Support Sample rate 8, 11.025, 12, 16, 22.05, 32, 44.1 and 48KHz;
- ✚ 4 channel Stereo Analog MUX;
- ✚ Two channel MIC amplifier input;
- ✚ High performance Stereo audio ADC with 90dB SNR;
- ✚ High performance Stereo audio DAC with

95dB SNR, with headphone amplifier output;

Peripheral and Interfaces

- ✚ Three 32-bit timers;
- ✚ Three multi-function 32-bit timers, support Capture and PWM mode;
- ✚ WatchDog;
- ✚ Three full-duplex UART;
- ✚ Two SPI;
- ✚ IR controller;
- ✚ SD Card Host controller;
- ✚ SPDIF receiver;
- ✚ Full speed USB 2.0 HOST/DEVICE controller;
- ✚ Sixteen Channels 10-bit SARADC;
- ✚ Integrate IRTC;
- ✚ Build in PMU, such as charger/buck/LDO;

Package

- ✚ QFN32L;

Temperature

- ✚ Operating temperature: -40℃ to +85℃;
- ✚ Storage temperature: -65℃ to +150℃ ;

2 Interrupts

Support vectorized interrupts, exceptions on illegal instructions and exceptions on load and store instructions to invalid addresses.

Exception vectors

Interrupt number	Address	Description
0	0x00	Reset
1	0x10	
2	0x20	
3	0x30	
4	0x40	Low priority interrupt
5	0x50	
6	0x60	
7	0x70	
8	0x80~0x280	High priority interrupt(see the following table)

High priority interrupt vectors

Interrupt number	Address	Description
0	0x80	
1	0x90	
2	0xa0	Software interrupt
3	0xb0	Timer0 interrupt
4	0xc0	Timer1 interrupt
5	0xd0	Timer2 interrupt Timer4 interrupt Timer5 interrupt
6	0xe0	Timer3 interrupt IR receiver interrupt
7	0xf0	
8	0x100	
9	0x110	
10	0x120	
11	0x130	
12	0x140	
13	0x150	
14	0x160	UART0 interrupt UART1 interrupt UART2 interrupt
15	0x170	
16	0x180	
17	0x190	
18	0x1a0	Port interrupt
19	0x1b0	
20	0x1c0	
21	0x1d0	
22	0x1e0	
23	0x1f0	
24	0x200	
25	0x210	
26	0x220	
27	0x230	
28	0x240	
29	0x250	

Interrupt number	Address	Description
30	0x260	
31	0x270	

2.1 Interrupts Special Registers

Register 2-1PICCON: Peripheral interrupt control Register

Bit	Name	Mode	Default	Description
31:17	-	-	-	Unused
16	GIEM	WR	1	Global interrupt enable mask bit 0: disable interrupt 1: enable interrupt
15:8	-	-	-	Unused
7:3	-	-	-	Unused
2	HPINTEN	WR	0	High priority interrupt enable bit 0: disable 1: enable
1	LPINTEN	WR	0	Low priority interrupt enable bit 0: disable 1: enable
0	GIE	WR	0	Global interrupt enable bit 0: disable interrupt 1: enable interrupt

Register 2-2PICCONSET: Peripheral interrupt control set Register

Bit	Name	Mode	Default	Description
31:17	-	-	-	Unused
16	GIEM	W	0	Write 1 enable Global interrupt enable mask
15:8	-	-	-	Unused
7:3	-	-	-	Unused
2	HPINTEN	W	0	Write 1 enable High priority interrupt
1	LPINTEN	W	0	Write 1 enable Low priority interrupt
0	GIE	W	0	Write 1 enable Global interrupt

Register 2-3PICCONCLR: Peripheral interrupt control clear Register

Bit	Name	Mode	Default	Description
31:17	-	-	-	Unused
16	GIEMDIS	W	0	Write 1 disable Global interrupt enable mask
15:8	-	-	-	Unused
7:3	-	-	-	Unused
2	HPINTDIS	W	0	Write 1 disable High priority interrupt
1	LPINTDIS	W	0	Write 1 disable Low priority interrupt
0	GIEDIS	W	0	Write 1 disable Global interrupt

Register 2-4PICEN: Peripheral interrupt enable Register

Bit	Name	Mode	Default	Description
31:0	IntEN	WR	0x0	Interrupt 31 to 0 enable bit 0: disable 1: enable

Register 2-5PICENSET: Peripheral interrupt enable set Register

Bit	Name	Mode	Default	Description
31:0	IntEN	W	0x0	Write 1 enable Interrupt 31 to 0

Register 2-6PICENCLR: Peripheral interrupt enable clear Register

Bit	Name	Mode	Default	Description
31:0	IntDIS	W	0x0	Write 1 disable Interrupt 31 to 0

Register 2-7PICPR: Peripheral high priority interrupt selection Register

Bit	Name	Mode	Default	Description
31:0	IntPR	WR	0x0	Interrupt 31 to 0 priority selection bit 0: low priority interrupt 1: high priority interrupt

Register 2-8PICADR: Peripheral interrupt address Register

Bit	Name	Mode	Default	Description
31:10	BADR	WR	0x40	Interrupt entry address
9:0	-	-	0x0	

Register 2-9PICPND: Peripheral interrupt pending Register

Bit	Name	Mode	Default	Description
31:3	IntPND[31:4]	R	0x0	Interrupt 31 to 4 pending bit 0: no interrupt pending 1: interrupt pending
2	SWIPND	WR	0	Software interrupt pending. Write 1 will clear software interrupt pending
1:0	IntPND[2:0]	R	0x0	Interrupt 2 to 0 pending bit 0: no interrupt pending 1: interrupt pending

3 GPIO Management

3.1 Features

1. Control GPIO input/output direction by using direction register;
2. Internal pull-up/pull-down resistor by using pull-up/pull-down resistor control register;
3. Select suitable output driving current capability;

3.2 GPIO general control register

Register 3-1GPIOA: Port A data Register

Bit	Name	Mode	Default	Description
31:8	-	-	-	Unused
7:0	GPIOA	WR	0x00	PAx data. Valid when PAx is used as GPIO 0: PAx is input low state when read and output low at PAx when write; 1: PAx is input high state when read and output high at PAx when write

Register 3-2GPIOASET: Port A Set output data Register

Bit	Name	Mode	Default	Description
31:8	-	-	-	Unused
7:0	GPIOASET	WO	X	Set PAx output data. Write 1 set output data. Write 0 affect nothing.

Register 3-3GPIOACLR: Port A clear output data Register

Bit	Name	Mode	Default	Description
31:8	-	-	-	Unused
7:0	GPIOACLR	WO	X	Clear PAx output data. Write 1 clear output data. Write 0 affect nothing.

Register 3-4GPIOADIR: Port A direction Register

Bit	Name	Mode	Default	Description
31:8	-	-	-	Unused
7:0	GPIOADIR	WR	0xFF	PAx direction control 0: Output 1: Input

Register 3-5GPIOAPU: Port A pull-up Register

Bit	Name	Mode	Default	Description
31:8	-	-	-	Unused
7:0	GPIOAPU	WR	0x0	PAx 10KΩ pull-up resistor control. Valid when PAx is used as input 0: disable 1: enable

Register 3-6GPIOAPD: Port A pull-down resistor Register

Bit	Name	Mode	Default	Description
31:8	-	-	-	Unused
7:0	GPIOAPD	WR	0x0	PAx 10KΩ pull-down resistor control. Valid when PAx is used as input 0: disable 1: enable

Register 3-7GPIOAPU200K: Port A pull-up resistor Register

Bit	Name	Mode	Default	Description
31:8	-	-	-	Unused
7:0	GPIOAPU	WR	0x0	PAx 200KΩ pull-up resistor control. Valid when PAx is used as input 0: disable 1: enable

Register 3-8GPIOAPD200K: Port A pull-down resistor Register

Bit	Name	Mode	Default	Description
31:8	-	-	-	Unused
7:0	GPIOAPD	WR	0x0	PAx 200KΩ pull-down resistor control. Valid when PAx is used as input 0: disable 1: enable

Register 3-9GPIOAPU300: Port A pull-up resistor Register

Bit	Name	Mode	Default	Description
31:8	-	-	-	Unused
7:0	GPIOAPU	WR	0x0	PAx 300Ω pull-up resistor control. Valid when PAx is used as input 0: disable 1: enable

Register 3-10GPIOAPD300: Port A pull-down resistor Register

Bit	Name	Mode	Default	Description
31:8	-	-	-	Unused
7:0	GPIOAPD	WR	0x0	PAx 300Ω pull-down resistor control. Valid when PAx is used as input 0: disable 1: enable

Register 3-11GPIOADE: Port A digital function enable register

Bit	Name	Mode	Default	Description
31:8	-	-	-	Unused
7:0	GPIOADE	WR	0xFF	PAx digital function enable 0: Port used as analog IO 1: Port used as digital IO

Register 3-12GPIOAFEN: Port A function mapping enable register

Bit	Name	Mode	Default	Description
-----	------	------	---------	-------------

Bit	Name	Mode	Default	Description
31:8	-	-	-	Unused
7:0	GPIOAFEN	WR	0xFF	PAx function mapping enable 0: Port used as GPIO 1: Port used as function IO

Register 3-13GPIOADRV: Port A output driving select Register

Bit	Name	Mode	Default	Description
31:8	-	-	-	Unused
7:0	GPIOADRV	WR	0x0	PAx output driving select 0: 8mA 1: 32mA

3.3 GPIO function mapping

Register 3-14FUNCMCON0: Port function mapping control Register 0

Bit	Name	Mode	Default	Description
31:28	UT1RXMAP	WR	0x0	UART1 RX mapping 0000: no affect 0001: map to G1 0010: map to G2 0011: map to TX pin by UT1TXMAP select 1111: Clear these bits Others is reserved
27:24	UT1TXMAP	WR	0x0	UART1 TX mapping 0000: no affect 0001: map to G1 0010: map to G2 1111: Clear these bits Others is reserved
23:20				
19:16				
15:12	UT0RXMAP	WR	0x0	UART0 RX mapping 0000: no affect 0001: map to G1 0010: map to G2 0011: map to G3 0100: map to G4 0101: map to G5 0110: map to G6 0111: map to TX pin by UT0TXMAP select 1111: Clear these bits Others is reserved
11:8	UT0TXMAP	WR	0x0	UART0 TX mapping 0000: no affect 0001: map to G1 0010: map to G2 0011: map to G3 0100: map to G4 0101: map to G5 0110: map to G6 0111: map to G7 1111: Clear these bits Others is reserved
7:4	SPI0MAP	WR	0x0	SPI0 mapping 0000: no affect 0001: map to G1 0010: map to G2

Bit	Name	Mode	Default	Description
				0011: map to G3 1111: Clear these bits Others is reserved
3:0	SD0MAP	WR	0x0	SD0 mapping 0000: no affect 0001: map to G1 0010: map to G2 0011: map to G3 0100: map to G4 0101: map to G5 0110: map to G6 1111: Clear these bits Others is reserved

Register 3-15FUNCMCON1: Port function mapping control Register 1

Bit	Name	Mode	Default	Description
31:28				
27:24				
23:20				
19:16				
15:12				
11:8	UT2RXMAP	WR	0x0	UART2 RX mapping 0000: no affect 0001: map to G1 0010: map to G2 0011: map to TX pin by UT2TXMAP select 1111: Clear these bits Others is reserved
7:4	UT2TXMAP	WR	0x0	UART2 TX mapping 0000: no affect 0001: map to G1 0010: map to G2 1111: Clear these bits Others is reserved
3:0				

Register 3-16FUNCMCON2: Port function mapping control Register 2

Bit	Name	Mode	Default	Description
31:24	-	-	-	Unused
23:20				
19:16	TMR5MAP	WR	0x0	Timer5 PWM mapping 0000: no affect 0001: map to G1 1111: Clear these bits Others is reserved
15:12	TMR4MAP	WR	0x0	Timer4 PWM mapping 0000: no affect 0001: map to G1 1111: Clear these bits Others is reserved
11:8	TMR3MAP	WR	0x0	Timer3 PWM mapping 0000: no affect 0001: map to G1 1111: Clear these bits Others is reserved
7:4	TMR3CPTMAP	WR	0x0	Timer3 capture Pin mapping 0000: no affect 0001: map to G1 0010: map to G2 0011: map to G3

Bit	Name	Mode	Default	Description
				0100: map to G4 0101: map to G5 0110: map to G6 0111: map to G7 1111: Clear these bits Others is reserved
3:0				

3.4 External Port interrupt wake up

Support eight wakeup source input, as the following table.

Wakeup source	Wakeup circuit
PA7	Wakeup circuit 0
PB1	Wakeup circuit 1
PB2	Wakeup circuit 2
PB3	Wakeup circuit 3
PB4	Wakeup circuit 4
WKO	Wakeup circuit 5
PORT_INT_FALL	Wakeup circuit 6
PORT_INT_RISE	Wakeup circuit 7

Register 3-17WKUPCON: Wake up control Register

Bit	Name	Mode	Default	Description
31:17	-	-	-	Unused
16	WKIE	WR	0	Wake up interrupt enable 0: disable 1: enable
15:8	-	-	-	Unused
7:0	WKEN	WR	0x0	Wake up input 7~0 enable 0: disable 1: enable

Register 3-18WKUPEDG: Wake up edge select Register

Bit	Name	Mode	Default	Description
31:24	-	-	-	Unused
23:16	WKPND	R	0x0	Wake up input 7~0 pending 0: no pending 1: wake up pending
15:8	-	-	-	Unused
7:0	WKEDG	WR	0x0	Wake up input 7~0 wakeup edge select 0: rising edge 1: falling edge

Register 3-19WKUPCPND: Wake up clear pending Register

Bit	Name	Mode	Default	Description
31:8	-	-	-	Unused
23:16	WKCPND	W	0x0	Wake up input 7~0 clear pending 0: no affect 1: clear wake up pending
15:0	-	-	-	Unused

Register 3-20PORTINTEN: Port interrupt enable Register

Bit	Name	Mode	Default	Description
31:0	PORTINTEN	WR	0x0	Port interrupt 0~31 enable bit 0: disable

Bit	Name	Mode	Default	Description
				1: enable

Register 3-21PORTINTEDG: Port interrupt edge select Register

Bit	Name	Mode	Default	Description
31:0	PORTINTEDG	WR	0x0	Port interrupt 0~31 edge select bit 0: rise edge 1: fall edge

4 Timer

4.1 Features

1. Timer0/1/2, only support 32bit timer function
2. Timer3/4/5, can be configured to Timer-mode, Counter-mode, Capture-mode and PWM-mode

4.2 Timer0/1/2 Special Function Registers

Register 4-1TMR0CON/TMR1CON/TMR2CON: Timer0/1/2 Control Register

Bit	Name	Mode	Default	Description
31:10	-	-	-	Unused
9	TPND	WR	0	Timer overflow pending 0: not overflow 1: overflow
8	-	-	-	Unused
7	TIE	WR	0	Timer overflow interrupt enable 0: disable 1: enable
6	INCSRC	WR	0	Increase source select 0: select TMR_INC 1: select external PIN
5:4	-	-	-	Unused
3:2	INCSEL	WR	0x0	Increase clock selection 00: System Clock 01: Counter input rising 10: Counter input falling 11: Counter input edge
1	-	-	-	Unused
0	TMREN	WR	0	Timer Enable Bit 0: Disable 1: Enable

Register 4-2TMR0CPND/TMR1CPND/TMR2CPND: Timer0/1/2 clear pending Register

Bit	Name	Mode	Default	Description
31:16	-	-	-	Unused
9	TPCLR	W	0	Timer overflow pending clear bit 0: inactive 1: clear pending
8:0	-	-	-	Unused

Register 4-3TMR0CNT/TMR1CNT/TMR2CNT: Timer0/1/2 counter Register

Bit	Name	Mode	Default	Description
31:0	TMRCNT	WR	0x0	Timer counter. TMRCNT will increase when timer is enabled. It overflows when TMRCNT = TMRPR, TMRCNT will be clear to 0x0000 when overflow, and the interrupt flag will be set '1'.

Register 4-4TMR0PR/TMR1PR/TMR2PR: Timer0/1/2 period Register

Bit	Name	Mode	Default	Description
31:0	TMRPR	WR	0xffffffff	Timer period = TMRPR + 1

4.3 Timer3/4/5 Special Function Registers

Register 4-5TMR3CON/TMR4CON/TMR5CON: Timer3/4/5 Control Register

Bit	Name	Mode	Default	Description
31:18	-	-	-	Unused
17	CPND	WR	0	Timer capture pending 0: not capture 1: capture
16	TPND	WR	0	Timer overflow pending 0: not overflow 1: overflow
15:12	-	-	-	Unused
11	PWM2EN	WR	0	Timer pwm2 enable bit 0: disable 1: enable
10	PWM1EN	WR	0	Timer pwm1 enable bit 0: disable 1: enable
9	PWM0EN	WR	0	Timer pwm0 enable bit 0: disable 1: enable
8	CIE	WR	0	Timer capture interrupt enable 0: disable 1: enable
7	TIE	WR	0	Timer overflow interrupt enable 0: disable 1: enable
6	INCSRC	WR	0	Increase source select 0: select TMR_INC 1: select external PIN
5:4	CPTEDSEL	WR	0x0	Timer Capture edge select 00: No Capture 01: Capture PIN rising edge 10: Capture PIN falling edge 11: Capture PIN edge
3:2	INCSEL	WR	0x0	Increase clock selection 00: System Clock 01: Counter input rising 10: Counter input falling 11: Counter input edge
1	CPTEN	WR	0	Timer capture Enable Bit 0: Disable 1: Enable
0	TMREN	WR	0	Timer Enable Bit 0: Disable 1: Enable

Register 4-6TMR3CPND/TMR4CPND/TMR5CPND: Timer3/4/5 clear pending Register

Bit	Name	Mode	Default	Description
31:18	-	-	-	Unused
17	CPCLR	W	0	Capture pending clear bit 0: inactive 1: clear pending
16	TPCLR	W	0	Timer overflow pending clear bit 0: inactive 1: clear pending
15:0	-	-	-	Unused

Register 4-7TMR3CNT/TMR4CNT/TMR5CNT: Timer3/4/5 counter Register

Bit	Name	Mode	Default	Description
31:0	TMRCNT	WR	0x0	Timer counter. TMRCNT will increase when timer is enabled. It overflows when TMRCNT = TMRPR, TMRCNT will be clear to 0x0000 when overflow, and the interrupt flag will be set '1'.

Register 4-8TMR3PR/TMR4PR/TMR5PR: Timer3/4/5 period Register

Bit	Name	Mode	Default	Description
31:0	TMRPR	WR	0xffffffff	Timer period = TMRPR + 1

Register 4-9TMR3CPT/TMR4CPT/TMR5CPT: Timer3/4/5 capture value Register

Bit	Name	Mode	Default	Description
31:0	TMRCPT	R	x	Timer capture value

Register 4-10TMR3DUTY0/TMR4DUTY0/TMR5DUTY0: Timer3/4/5 pwm0 duty Register

Bit	Name	Mode	Default	Description
31:16	-	-	-	Unused
15:0	TMRDUTY0	W	x	Timer pwm0 duty PWM0 low level length is TMRDUTY0+1 PWM 0 high level length is TMRPR-TMRDUTY0+1

Register 4-11TMR3DUTY1/TMR4DUTY1/TMR5DUTY1: Timer3/4/5 pwm1 duty Register

Bit	Name	Mode	Default	Description
31:16	-	-	-	Unused
15:0	TMRDUTY1	W	x	Timer pwm1 duty PWM1 low level length is TMRDUTY1+1 PWM1 high level length is TMRPR-TMRDUTY1+1

Register 4-12TMR3DUTY2/TMR4DUTY2/TMR5DUTY2: Timer3/4/5 pwm2 duty Register

Bit	Name	Mode	Default	Description
31:16	-	-	-	Unused
15:0	TMRDUTY2	W	x	Timer pwm2 duty PWM2 low level length is TMRDUTY2+1 PWM2 high level length is TMRPR-TMRDUTY2+1

5 PWM

5.1 Features

Four channel PWM for Breathing-lamp

5.2 Special Function Registers

Register 5-1 PWMCON: PMW Configure Register

Bit	Name	Mode	Default	Description
31:5				
5	PWMIVN	WR	0	PWM invert enable 0: duty is high level 1: duty is low level
4	AUTOADJUST	WR	0	PWM Auto Adjust enable 0: disable 1: enable
3	PWM3EN	WR	0	PWM3 enable 0: disable 1: enable
2	PWM2EN	WR	0	PWM2 enable 0: disable 1: enable
1	PWM1EN	WR	0	PWM1 enable 0: disable 1: enable
0	PWM0EN	WR	0	PWM0 enable 0: disable 1: enable

Register 5-2 PWMPR: PMW period Register

Bit	Name	Mode	Default	Description
31:16				
15:0	PWMPR	WR	0xffff	PWM period = (PWMPR+1) * T _{pwmclk}

Register 5-3 PWM01DUT: PWM0/1 duty registers

Bit	Name	Mode	Default	Description
31:16	PWM1DUT	WR	0x0	PWM1 duty register ; Duty = PWM1DUT/ PWMPR
15:0	PWM0DUT	WR	0x0	PWM0 duty register ; Duty = PWM0DUT/ PWMPR

Register 5-4 PWM23DUT: PWM2/3 duty registers

Bit	Name	Mode	Default	Description
31:16	PWM3DUT	WR	0x0	PWM3 duty register ; Duty = PWM3DUT/ PWMPR
15:0	PWM2DUT	WR	0x0	PWM2 duty register ; Duty = PWM2DUT/ PWMPR

Register 5-5 PWMCYCNUM: PWM adjust cycle number register

Bit	Name	Mode	Default	Description
31:24	PWM3CYCNUM	WR	0x0	PWM3 Duty adjust cycle num When AUTOADJUST = 1, each PWM3CYCNUM Duty add (PWM3STEP/ PWMPR)
23:16	PWM2CYCNUM	WR	0x0	PWM2 Duty adjust cycle num When AUTOADJUST = 1, each PWM2CYCNUM Duty add (PWM2STEP/ PWMPR)
15:8	PWM1CYCNUM	WR	0x0	PWM1 Duty adjust cycle num When AUTOADJUST = 1, each PWM1CYCNUM Duty add (PWM1STEP/ PWMPR)
7:0	PWM0CYCNUM	WR	0x0	PWM0 Duty adjust cycle num When AUTOADJUST = 1, each PWM0CYCNUM Duty add

Bit	Name	Mode	Default	Description
				(PWM0STEP/ PWMPR)

Register 5-6 PWMSTEP: PWM Step register

Bit	Name	Mode	Default	Description
31:24	PWM3STEP	WR	0x0	PWM3 Duty adjust step
23:16	PWM2STEP	WR	0x0	PWM2 Duty adjust step
15:8	PWM1STEP	WR	0x0	PWM1 Duty adjust step
7:0	PWM0STEP	WR	0x0	PWM0 Duty adjust step

6 RTC

6.1 Features

1. Support 32bit Independent power supply real time counter
2. Support alarm interrupt and second interrupt

6.2 Special Function Registers

Register 6-1RTCCON: RTC Control Register

Bit	Name	Mode	Default	Description
31:13	-	-	-	Unused
20	VUSBONLINE	R	0	VUSB online state 0: not online 1: online
19	RTCWKP	R	0	RTC WK pin state 0: WK pin state is 0 1: WK pin state is 1
18	RTC1SPND	R	0	RTC 1s pending 0: no pending 1: 1s pending
17	ALMPND	R	0	RTC alarm pending 0: no pending 1: alarm pending
16	RTCPND	R	0	RTC trans done 0: done 1: not done
15:9	-	-	-	Unused
8	ALM_WKEN	WR	0	RTC alarm wakeup enable 0: disable 1: enable
7	RTC1S_WKEN	WR	0	RTC 1S wakeup enable 0: disable 1: enable
6	VUSBRSTEN	WR	0	VUSB insert reset system enable 0: disable 1: enable
5	WKUPRSTEN	WR	0	RTC wake up power down mode reset system enable 0: disable 1: enable
4	ALMIE	WR	0	RTC alarm interrupt enable 0: disable 1: enable
3	RTC1SIE	WR	0	RTC 1S interrupt enable 0: disable 1: enable
2:1	BAUDSEL	WR	0x0	Increase clock selection 00: System Clock divide 4 01: System Clock divide 8 10: System Clock divide 16 11: System Clock divide 32
0	RTCCS	WR	0	RTC cs 0: disabled

Bit	Name	Mode	Default	Description
				1:enable

Register 6-2RTCDAT: RTC data Register

Bit	Name	Mode	Default	Description
31:10	-	-	-	Unused
9:8	RTCMD	W	0x0	RTC cmd 00: data 01: read command 10: write command 11: reserve
7:0	RTCDAT	WR	x	RTC data

Register 6-3RTCCPND: RTC clear pending Register

Bit	Name	Mode	Default	Description
31:19	-	-	-	Unused
18	C1SPND	R	0	Write 1 will clear RTC 1S pending
17	CALMPND	R	0	Write 1 will clear RTC alarm pending
16:0	-	-	-	Unused

6.3 Independent Power RTC Registers

Register 6-4 RTCCNT: RTC counter Register

Bit	Name	Mode	Default	Description
31:0	RTCCNT	WR	0x0	32bit RTC counter

Register 6-5 RTCALM: RTC alarm Register

Bit	Name	Mode	Default	Description
31:0	RTCALM	WR	0xffffffff	32bit RTC alarm

Register 6-6 RTCCON0: RTC control Register 0

Bit	Name	Mode	Default	Description
7	PWRUP1ST	WR	1	RTC first power up flag 0: not first power up 1: first power up
6	EXT32KS	WR	0	External 32K select 0: use RTC internal 32K osc 1: use external 32K osc
5	RSV	WR	1	Reserve, can't be changed default value
4	RSV	WR	0	Reserve, can't be changed default value
3	RSV	WR	0	Reserve, can't be changed default value
2	RSV	WR	0	Reserve, can't be changed default value
1	X32KEN	WR	0	XOSC32K enable bit 0: disable 1: enable
0	RSV	WR	0	Reserve, can't be changed default value

Register 6-7 RTCCON1: RTC control Register 1

Bit	Name	Mode	Default	Description
7	-	-	-	Unused
6	VRTCEN	WR	0	VRTC enable bit, VRTC voltage for ADC 0: disable 1: enable
5	WKPAEN	WR	0	WK pin analog enable bit, output WKO voltage for ADC 0: disable 1: enable

Bit	Name	Mode	Default	Description
4	WKPPUEN	WR	1	WK pin pull up enable bit 0: disable 1: enable
3:2	WKPPUS	WR	0x1	WK pin pull up select bit 00: 80K 01: 90K 10: 100K 11: 400K
1	WKPPD	WR	0	WK pin pull down 10K enable bit 0: disable 1: enable
0	WKPIE	WR	1	WK pin input enable bit 0: disable 1: enable

Register 6-8 RTCCON2: RTC control Register 2

Bit	Name	Mode	Default	Description
7	32KSEL	WR	0	32K osc select bit 0: 32.768K 1: 32K
6	SELVDDPU	WR	1	SEL VDD pullup enable 0: disable 1: enable
5:4	RSV	WR	0x0	Reserve, can't be changed default value
3:2	RSV	WR	0x2	Reserve, can't be changed default value
1:0	RSV	WR	0x2	Reserve, can't be changed default value

Register 6-9 RTCCON3: RTC control Register 3

Bit	Name	Mode	Default	Description
7	RTC1S_WKEN	WR	0	RTC one second wakeup enable bit 0: disable 1: enable
6	ALM_WKEN	WR	0	RTC alarm wakeup enable bit 0: disable 1: enable
5	VSUB_WKEN	WR	0	VUSB wake up enable bit 0: disable 1: enable
4	WKP_WKEN	WR	0	WK pin wake up enable bit 0: disable 1: enable
3	-	-	-	Unused
2	VCOREEN	WR	1	VDDCORE enable bit 0: disable 1: enable
1	VIOEN	WR	1	VDDIO enable bit 0: disable 1: enable
0	BUCKEN	WR	1	BUCK enable bit 0: disable 1: enable

Register 6-10 RTCCON5: RTC control Register 5

Bit	Name	Mode	Default	Description
7	-	-	-	Unused
6	RSV	WR	0	Reserve, can't be changed default value
5:4	RSV	WR	0x0	Reserve, can't be changed default value
3:2	RSV	WR	0x0	Reserve, can't be changed default value
1	BUCKLPM	WR	0	BUCK low power mode enable

Bit	Name	Mode	Default	Description
				0: disable 1: enable
0	LDO	WR	1	BUCK LDO mode select bit 0: buck mode 1: LDO mode

Register 6-11 RTCCON7: RTC control Register 7

Bit	Name	Mode	Default	Description
7:5	-	-	-	Unused
4	WKOPRT	WR	0	WKO protect bit
3	LVDDTEN	WR	0	LVD detect enable after power up by wake up 0: disable 1:enable
2	WKPEN	WR	0	WK pin filter enable bit 0: disable 1:enable
1:0	WKPFSEL	WR	0x0	WK pin filter select bit 00:8ms 01:32ms 10:128ms 11:512ms

Register 6-12 RTCCON8: RTC control Register 8

Bit	Name	Mode	Default	Description
7:5	-	-	-	Unused
4	VSUBP	R	0	VUSB wake up pending 0: no pending 1: pending
3	WKP	R	0	WK pin wake up pending 0: no pending 1: pending
2	RTC1SPC	WR	0	When write: RTC 1 second pending clear 0: no affect 1: clear 1s pending When read: RTC 1 second pending 0: no second pending 1: second pending
1	ALMPC	WR	0	When write: RTC alarm pending clear 0: no affect 1: clear alarm pending When read: Alarm pending 0: no alarm pending 1: alarm pending
0	WKP10SC	WR	0	When write WK pin 10s pending clear 0: no affect 1: clear 10s pending When read: WK pin 10s pending 0: no 10s pending 1: 10s pending

Register 6-13 RTCCON9: RTC control Register 9

Bit	Name	Mode	Default	Description
7:4	-	-	-	Unused
3:0	WKP10SEN	W	0xa	WK pin 10s reset enable

Bit	Name	Mode	Default	Description
				0xa: disable Others: enable After enable, can't disable.

7 UART0

7.1 Features

1. UART is a serial port capable of asynchronous transmission.
2. The UART can function in full duplex mode.

7.2 UART0 Special Function Registers

Register 7-1UART0CON: UART Control Register

Bit	Name	Mode	Default	Description
31:10	-	-	-	Unused
9	RXPND	R	0	RX pending 0: RX one byte not finish 1: RX one byte finish
8	TXPND	R	0	TX pending 0: TX one byte not finish 1: TX one byte finish
7	RXEN	WR	0	RX enable 0: RX disable 1: RX enable
6	ONELINE	WR	0	One-line mode 0: TX/RX separate 1: TX/RX one line
5	CLKSRC	WR	0	Clock source select 0: system clock 1: uart_inc
4	SB2EN	WR	0	Two Stop Bit enable 0: 1-bit Stop Bit 1: 2 bit Stop Bit
3	TXIE	WR	0	Transmit Interrupt Enable 0 = Transmit interrupt disable 1 = Transmit interrupt enable
2	RXIE	WR	0	Receive Interrupt Enable 0: Receiver interrupt disable 1: Receiver interrupt enable
1	BIT9EN	WR	0	BIT9 Enable Bit 0: Eight-bit mode 1: Nine-bit mode
0	UTEN	WR	0	UART Enable Bit 0: Disable UART module 1: Enable UART module

Register 7-2UART0CPND: UART0 clear pending Register

Bit	Name	Mode	Default	Description
31:18	-	-	-	Unused
17	CRSTKEYPND	W	0	Reset Key match pending clear 0: N/A 1: Clear Reset key match Pending
16	CKEYPND	W	0	Key match pending clear 0: N/A 1: Clear key match Pending

Bit	Name	Mode	Default	Description
15:10	-	-	-	Unused
9	CRXPND	W	0	RX pending clear 0: N/A 1: Clear RX Pending
8	CTXPND	W	0	TX pending clear 0: N/A 1: Clear TX Pending. Writing data to UTBUF will clear TXPND
7:0	-	-	-	Unused

Register 7-3UART0BAUD: UART Baud Rate Register

Bit	Name	Mode	Default	Description
31:16	UART0RXBAUD	W	0	UART RX Baud Rate Baud Rate = Fsys clock / (UART0RXBAUD + 1)
15:0	UART0TXBAUD	W	0	UART TX Baud Rate Baud Rate = Fsys clock / (UART0TXBAUD + 1)

Register 7-4 UART0DATA: UART Data Register

Bit	Name	Mode	Default	Description
31:9	-	-	-	Unused
8	UART0BIT8	WR	x	UART Data bit 8
7:0	UART0DAT	WR	x	UART Data Write this register will load the data to transmitter buffer. Read this register will read the data from the receiver buffer..

7.3 User Guide

1. Set IO in the correct direction.
2. Configure UART0BAUD to choose sample rate
3. Enable UART0 by setting
4. Set TXIE or RXIE 'to 1' if needed
5. write data to UART0DATA
6. Wait for PND to change to '1', or wait for interrupt
7. Read received data from UART0DATA if needed

8 SPI0

8.1 Features

SPI0 can support different mode

1. general 3 wire mode, 1-bit clock in/out, 1-bit data output, 1-bit data input
2. 2 wire mode, 1-bit clock in/out, 1-bit data output or input;
3. 2 data bus mode, 1-bit clock in/out, 2-bit data output or input;
4. 4 data bus mode, 1-bit clock in/out, 4-bit data output or input;

9 Characteristics

9.1 PMU Parameters

Table 9-1 PMU voltage input Parameters

Sym	Characteristics	Min	Typ	Max	Unit	Conditions
VUSB	Charger Voltage input	3.0	5.0	5.0	V	
VBAT	Voltage input	3.0	3.7	5.0	V	

Table 9-2 3.3V LDO Parameters

Sym	Characteristics	Min	Typ	Max	Unit	Conditions
VDDIO	3.3V LDO voltage output	3.0	3.3	3.6	V	Light Loading condition
Δ VVDDIO	Output Mismatch 1-sigma	-	56	-	mV	VDDIO=3.3v
ILOAD	Maximum output current	-	-	150	mA	@VBAT=3.6v
ISC	Short Circuit Current Limit	-	-	300	mA	@VBAT=3.8v

Table 9-3 1.6V LDO Parameters

Sym	Characteristics	Min	Typ	Max	Unit	Conditions
VDDBT	1.6V LDO voltage output	-	1.6	-	V	Light Loading condition
Δ VVDDBT	Output Mismatch 1-sigma	-	27	-	mV	VDDBT=1.6v
ILOAD	Maximum output current	-	-	100	mA	@VBAT=3.0v
ISC	Short Circuit Current Limit	-	-	200	mA	@VBAT=3.8v

Table 9-4 1.2V LDO Parameters

Sym	Characteristics	Min	Typ	Max	Unit	Conditions
VDDCORE	1.2V LDO voltage output	-	1.2	-	V	Light Loading condition
Δ VVDDCORE	Output Mismatch 1-sigma	-	20	-	mV	VDDCORE=1.2v
ILOAD	Maximum output current	-	-	80	mA	@VBAT=3.6v
ISC	Short Circuit Current Limit	-	-	120	mA	@VBAT=3.8v

9.2 IO Parameters

Table 9-5 I/O Parameters

GPIO—Electrical Characteristics							
Symbol	Description	Related GPIO	Min	Typical	Max	Units	Conditions
V _{IL}	Low-level input voltage		-0.3		1.27	V	VDDIO=3.3V
V _{IH}	High-level input voltage		2.03		3.6	V	VDDIO=3.3V
Driver Ability 1	Output Driver Ability 1			32		mA	VDDIO=3.3V
Driver Ability 0	Output Driver Ability 0			8		mA	VDDIO=3.3V
R _{PUP0}	Internal pull-up resistor 0		8	10	12	K Ω	
R _{PUP1}	Internal pull-up resistor 1		0.24	0.3	0.36	K Ω	
R _{PUP2}	Internal pull-up resistor 2		160	200	240	K Ω	
R _{PDN0}	Internal pull-down resistor 0		8	10	12	K Ω	
R _{PDN1}	Internal pull-down resistor 1		0.24	0.3	0.36	K Ω	
R _{PDN2}	Internal pull-down resistor 2		160	200	240	K Ω	

9.3 Audio DAC Parameters

Table 9-6 Audio DAC Parameters

Sym	Characteristics	Min	Typ	Max	Unit	Conditions
SNR		-	96	-	dB	VCM cap=1uF VDDDAC cap=1uF with A-wt filter Output -3dBV Fin=1KHz
THD+N		-	-86	-	dB	VCM cap=1uF VDDDAC cap=1uF with A-wt filter Output -3dBV with 10K loading Fin=1KHz
Output Range	Maximum output voltage	-	2.6		V _{peak-peak}	32ohm Loading

9.4 Audio ADC Parameters

Table 9-7 Audio ADC Parameters

Sym	Characteristics	Min	Typ	Max	Unit	Conditions
SNR		-	90	-	dB	VCM cap=1uF VDDDAC cap=1uF with A-wt filter Input sine amplitude, 850mV RMS Fin=1KHz
THD+N		-	-87	-	dB	VCM cap=1uF VDDDAC cap=1uF with A-wt filter Input sine amplitude, 850mV RMS Fin=1KHz.
Input Range	Input sine wave peak amplitude	0		VCM	V	From aux input, aux 0db gain, VCM represent VCM voltage.

9.5 BT Parameters

Table 9-8 BT Parameters

Characteristics	Min	Typical	Max	Unit	Conditions
Maximum Transmit Power	-	2	-	dBm	
RMS DEVM	-	5.5	-	%	Maximum TX power 2-DH5 packet
Peak DEVM	-	12.5		%	
EDR Relative Transmit Power		-0.2		dB	
Sensitivity @ Basic Rate		-90.5		dBm	BER=0.1%, using DH5 packet
Sensitivity @ EDR		-89.5		dBm	BER=0.01%, using 2-DH5 packet

9.6 Current Parameters

Table 9-9 Current Parameters

Sym	Characteristics	Min	Typ	Max	Unit	Conditions
IRTC	RTC mode current	-	4	-	uA	4.2V input, room temp.
Sleep	Sleep current	-	500	2000	uA	3.3V input, room temp