

RY系列




专业从事温度保险丝生产35年
Specialized in producing thermal fuse over 35 years

UL  CQC  CE  CB ROHS REACH

尺寸图

DIMENSIONAL DRAWING



规格标准/Specification and Standard (mm)					
	A	B	C	D	E
标准引线 Standard Lead Wire	25±1	11±1	32±1	Φ1±0.1	Φ4.0±0.1
加长引线 Long Lead Wire	38±1			Φ1.2±0.1	

参数

ELECTRIC PARAMEMETERS

Rated voltage

额定电压：125V-250V，AC

Rated current

额定电流：10A-16A

Frequency


频率：50 or 60HZ

Maximum quantity of electricity allowed

最大允许插入电流：250V,AC 10A-16A

材质•镀层

MATERIAL & PLATING

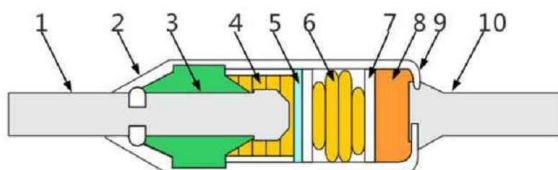

No.	部件Parts	材料 Material	电镀 Electroplating
1	引线 lead wire A	铜 Cu	镀银 silver plating
2	环氧树脂 Epoxy resin	环氧树脂 Epoxy resin	/
3	绝缘子 Isolated lead	陶瓷 Ceramic	/
4	动作弹簧 Trip spring	不锈钢 Stainless steel	/
5	星触片 Star contact	银 silver	/
6	压缩弹簧 Compression spring	不锈钢 Stainless steel	/
7	圆片 discs	铜 Cu	/
8	感温熔块 Thermal pellet	有机材料 organic material	/
9	外壳 case	黄铜 flavon	镀银 silver plating
10	B引线 lead wire B	铜 Cu	镀锡 tinsplating

表示图

PRESENTATION DRAWING

 **SANYUAN**

商标
Trade mark

RYxxx

型号
Model

TF XXX°C

额定动作温度
Rated operating temperature

250V 10A

额定电压、额定电流
Rated voltage/Rated current



电气用品认可标记
Approved mark for electrical appliance




www.shanghaixinyuan.com

特点
TRAIT


The products have the ability to cut circuit immediately for high current, with non-resettable.
The thermal fuse has low internal resistance itself, small size that easy to install.
The products are sensitive to external temperature and the opreating temperature has high accuracy and stability.

具有对较大电流的电路作一次性动作切断的能力。
本身内阻较低，尺寸小，便于安装，
对外界温度感受灵敏，动作温度准确稳定。

温度保险丝特性曲线图
CHARACTERISTIC TEST

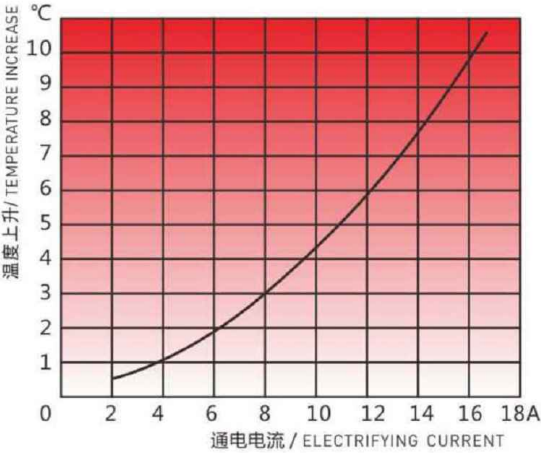

热熔断体动作原理
STRUCTURE AND OPERATING THEORY

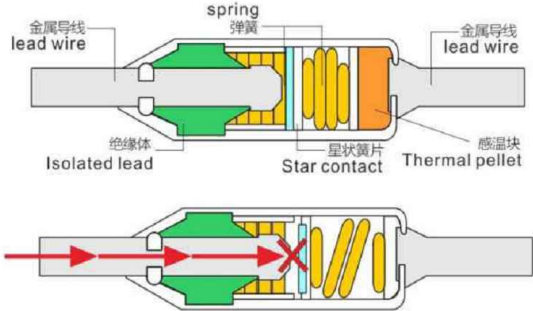

- 1、RY系列热熔断体由星状簧片、弹簧、感温块构成。
- 2、工作原理热熔断体启动之前电流从左侧引线流向星状簧片通过金属外壳向右侧引线流动。在外部温度达到预定温度时可熔体融化，压缩弹簧变松。即弹簧膨胀，星状簧片与左侧引线分离，与左侧引线间电流被切断。

- 1、RYthermal fuse is made up of star contact, spring and thermal pellet.
- 2、In the picture, we can see the current is started from the left down-lead, on the right. When the external temperature reaches operating temperature, and then separate the connection between star contact and the left down-lead. Thus, the current would be totally cut.

额定表
RATED FORM

"TF" 额定动作温度
Rated Functioning Temperature
"TO" 实际动作温度
Operating Temperature
"TC" 保持温度
Holding Temperature
"TM" 极限温度
Maximun Temperature Limit

序号 Number	型号 Part Number	TF °C	TO °C	TH °C	TM °C	额定电流 Rated Current	额定电压 Rated Voltage	通过认证 Pass certification			
								CE	CB	CCC	CQC
1	RY72	72	72±0.5	40	150	16A/15A/10A	250V	●	●	●	●
2	RY77	77	77±0.5	51	140			●	●	●	●
3	RY84	84	84±0.5	58	140			●	●	●	●
4	RY86	86	86±0.5	59	150			●	●	●	●
5	RY94	94	94±0.5	64	150			●	●	●	●
6	RY98	98	98±0.5	65	150			●	●	●	●
7	RY107	107	107±0.5	69	150			●	●	●	●
8	RY112	112	112±0.5	82	150			●	●	●	●
9	RY113	113	113±0.5	89	150			●	●	●	●
10	RY117	117	117±0.5	85	150			●	●	●	●
11	RY121	121	121±0.5	90	150			●	●	●	●
12	RY126	126	126±0.5	93	180			●	●	●	●
13	RY128	128	128±0.5	104	180			●	●	●	●
14	RY133	133	133±0.5	100	180			●	●	●	●
15	RY141	141	141±0.5	111	180			●	●	●	●
16	RY142	142	142±0.5	115	200			●	●	●	●
17	RY156	156	156±0.5	125	200			●	●	●	●
18	RY157	157	157±0.5	130	200			●	●	●	●
19	RY170	170	170±0.5	142	200			●	●	●	●
20	RY172	172	172±0.5	145	210			●	●	●	●
21	RY184	184	184±0.5	150	300			●	●	●	●
22	RY192	192	192±0.5	170	250			●	●	●	●
23	RY192-1	192	192±0.5	155	300			●	●	●	●
24	RY194	194	194±0.5	160	300			●	●	●	●
25	RY216	216	216±0.5	180	380			●	●	●	●
26	RY229	229	229±0.5	200	380			●	●	●	●
27	RY240	240	240±0.5	200	380			●	●	●	●

RY系列



额定表 RATED FORM

"TF" 额定动作温度 / Rated Functioning Temperature

"TO" 实际动作温度 / Operating Temperature

"TC" 保持温度 / Holding Temperature

"TM" 极限温度 / Maximun Temperature Limit

顺序 Number	型号 Part Number	TF °C	TO °C	TH °C	TM °C	额定 电流 Rated Current	额定 电压 Rated Voltage	通过认证 Pass certification						
								CCC	CB	UL	CE	RoHS	CE	PA
1	RY65	65	65+0-5	38	100	10A 15A	250V 125V							
2	RY70	70	70+0-5	46	150									
3	RY72	72	72+0-5	46	150									
4	RY76	76	76+0-5	48	150									
5	RY77	77	77+0-5	48	150									
6	RY84	84	84+0-5	59	150									
7	RY84	86	86+0-5	59	150									
8	RY86	86	86+0-5	59	150									
9	RY91	91	91+0-5	64	150									
10	RY94	94	94+0-5	66	150									
11	RY96	96	96+0-5	69	150									
12	RY98	98	98+0-5	69	150									
13	RY104	104	104+0-5	73	150									
14	RY105	107	107+0-5	73	150									
15	RY107	107	107+0-5	73	150									
16	RY110	112	112+0-5	98	180									
17	RY112	112	112+0-5	82	150									
18	RY113	113	113+0-5	89	150									
19	RY115	118	118+0-5	88	150									
20	RY117	117	117+0-5	91	150									
21	RY121	121	121+0-5	106	180									
22	RY126	123	123+0-5	94	180									
23	RY126	126	126+0-5	94	180									
24	RY128	128	128+0-5	101	180									
25	RY130	130	130+0-5	101	180									
26	RY133	133	133+0-5	104	180									
27	RY139	141	141+0-5	111	180									
28	RY141	141	141+0-5	111	180									
29	RY142	142	142+0-5	111	180									
30	RY153	156	156+0-5	125	200									
31	RY156	156	156+0-5	125	200									
32	RY157	157	157+0-5	125	200									
33	RY169	169	169+0-5	142	200									
34	RY169	170	170+0-5	142	200									
35	RY170	170	170+0-5	142	200									
36	RY172	172	172+0-5	142	200									
37	RY182	184	184+0-5	150	300									
38	RY184	184	184+0-5	150	300									
39	RY192	192	192+0-5	170	210									
40	RY192-1	192	192+0-5	170	210									
41	RY192	194	194+0-5	160	300									
42	RY194	194	194+0-5	160	300									
43	RY216	216	216+0-5	180	380									
44	RY227	227	227+0-5	200	380									
45	RY228	228	228+0-5	200	380									
46	RY229	229	229+0-5	200	380									
47	RY240	240	240+0-5	200	380									
48	RY250	250	250+0-5	200	380									
49	RY257	257	257+0-5	210	380									
50	RY260	260	260+0-5	210	380									

www.shanghaixinyuan.com