

## Assignment -4

|                     |  |
|---------------------|--|
| Student Name        | VIDHYA V                                   |
| Student Roll Number | 810419106068                               |
| Project Name        | Distance detection using ultrasonic sensor |

### Question-1:

Write code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100 cms send an "alert" to the IBM cloud and display in the device recent events. Upload document with wokwi share link and images of IBM cloud

### CODE 1 :

```
#include <WiFi.h>
#include <PubSubClient.h>

void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);

#define ORG "92zbfc"
#define DEVICE_TYPE "esp32"
#define DEVICE_ID "12345"
#define TOKEN "12345678"
String data3;
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char subscribetopic[] = "iot-2/cmd/test/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, callback, wifiClient);

const int trigPin = 5;
const int echoPin = 18;
#define SOUND_SPEED 0.034
long duration;
float distance;

void setup() {
  Serial.begin(115200);
  pinMode(trigPin, OUTPUT);
  pinMode(echoPin, INPUT);
  wificonnect();
  mqttconnect();
}

void loop()
{
  digitalWrite(trigPin, LOW);
  delayMicroseconds(2);
  digitalWrite(trigPin, HIGH);
  delayMicroseconds(10);
  digitalWrite(trigPin, LOW);
  duration = pulseIn(echoPin, HIGH);
  distance = duration * SOUND_SPEED/2;
  Serial.print("Distance (cm): ");
  Serial.println(distance);
  if(distance<100)
  {
    Serial.println("ALERT!!");
    delay(1000);
    PublishData(distance);
  }
}
```

```

delay(1000);
if (!client.loop()) {
  mqttconnect();
}
}
delay(1000);
}

void PublishData(float dist) {
  mqttconnect();
  String payload = "{\"Distance\":";
  payload += dist;
  payload += ", \"ALERT!!\": \"\"Distance less than 100cms\"\"";
  payload += "}";
  Serial.print("Sending payload: ");
  Serial.println(payload);

  if (client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish ok");
  } else {
    Serial.println("Publish failed");
  }
}

void mqttconnect() {
  if (!client.connected()) {
    Serial.print("Reconnecting client to ");
    Serial.println(server);
    while (!client.connect(clientId, authMethod, token)) {
      Serial.print(".");
      delay(500);
    }
    initManagedDevice();
    Serial.println();
  }
}

void wificonnect()
{
  Serial.println();
  Serial.print("Connecting to ");
  WiFi.begin("Wokwi-GUEST", "", 6);
  while (WiFi.status() != WL_CONNECTED) {
    delay(500);
    Serial.print(".");
  }
  Serial.println("");
  Serial.println("WiFi connected");
  Serial.println("IP address: ");
  Serial.println(WiFi.localIP());
}


void initManagedDevice() {
  if (client.subscribe(subscribetopic)) {
    Serial.println((subscribetopic));
    Serial.println("subscribe to cmd OK");
  } else {
    Serial.println("subscribe to cmd FAILED");
  }
}

void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
  Serial.print("callback invoked for topic: ");
  Serial.println(subscribetopic);
  for (int i = 0; i < payloadLength; i++)
  {
    data3 += (char)payload[i];
  }
  Serial.println("data: " + data3);
  data3="";
}

```

Wokwi Link :

## Output and Simulation :

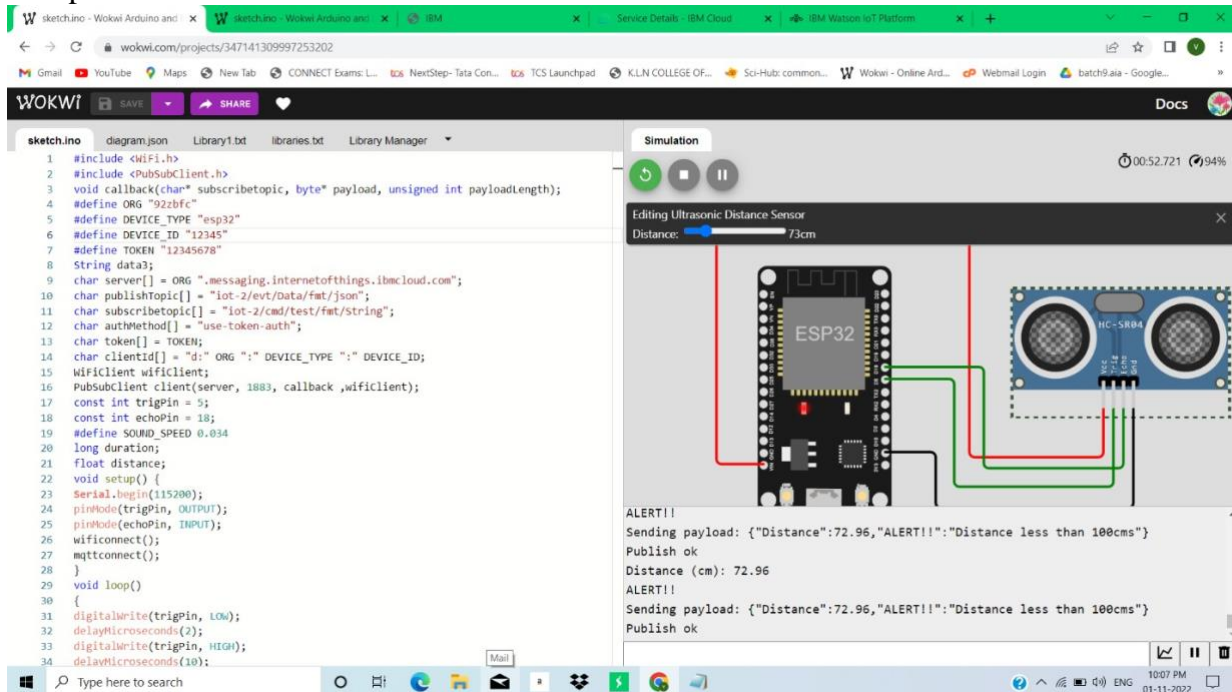


The screenshot shows the Wokwi web interface with a sketch of an ESP32 connected to an HC-SR04 Ultrasonic Distance Sensor. The sensor's distance is currently 73cm. The code in the sketch.ino file is as follows:

```
1 #include <WiFi.h>
2 #include <PubSubClient.h>
3 void callback(char* topic, byte* payload, unsigned int payloadLength);
4 #define ORG "92zbfc"
5 #define DEVICE_TYPE "esp32"
6 #define DEVICE_ID "12345"
7 #define TOKEN "12345678"
8 String data;
9 char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
10 char publishTopic[] = "iot-2/evt/Data/fmt/json";
11 char subscribeTopic[] = "iot-2/cmd/test/fmt/string";
12 char authMethod[] = "use-token-auth";
13 char token[] = TOKEN;
14 char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
15 WiFiClient wifiClient;
16 PubSubClient client(server, 1883, callback, wifiClient);
17 const int trigPin = 5;
18 const int echoPin = 18;
19 #define SOUND_SPEED 0.034
20 long duration;
21 float distance;
22 void setup() {
23   Serial.begin(115200);
24   pinMode(trigPin, OUTPUT);
25   pinMode(echoPin, INPUT);
26   wifiConnect();
27   mqttConnect();
28 }
29 void loop() {
30   {
31     digitalWrite(trigPin, LOW);
32     delayMicroseconds(2);
33     digitalWrite(trigPin, HIGH);
34     delayMicroseconds(10);
```

The simulation output shows the following sequence of events:

```
ALERT!!
Sending payload: {"Distance":72.96,"ALERT!!":"Distance less than 100cms"}
Publish ok
Distance (cm): 72.96
ALERT!!
Sending payload: {"Distance":72.96,"ALERT!!":"Distance less than 100cms"}
Publish ok
```

Whenever the distance is less than 100 cms send an "alert" to the IBM cloud and display in the device recent events.

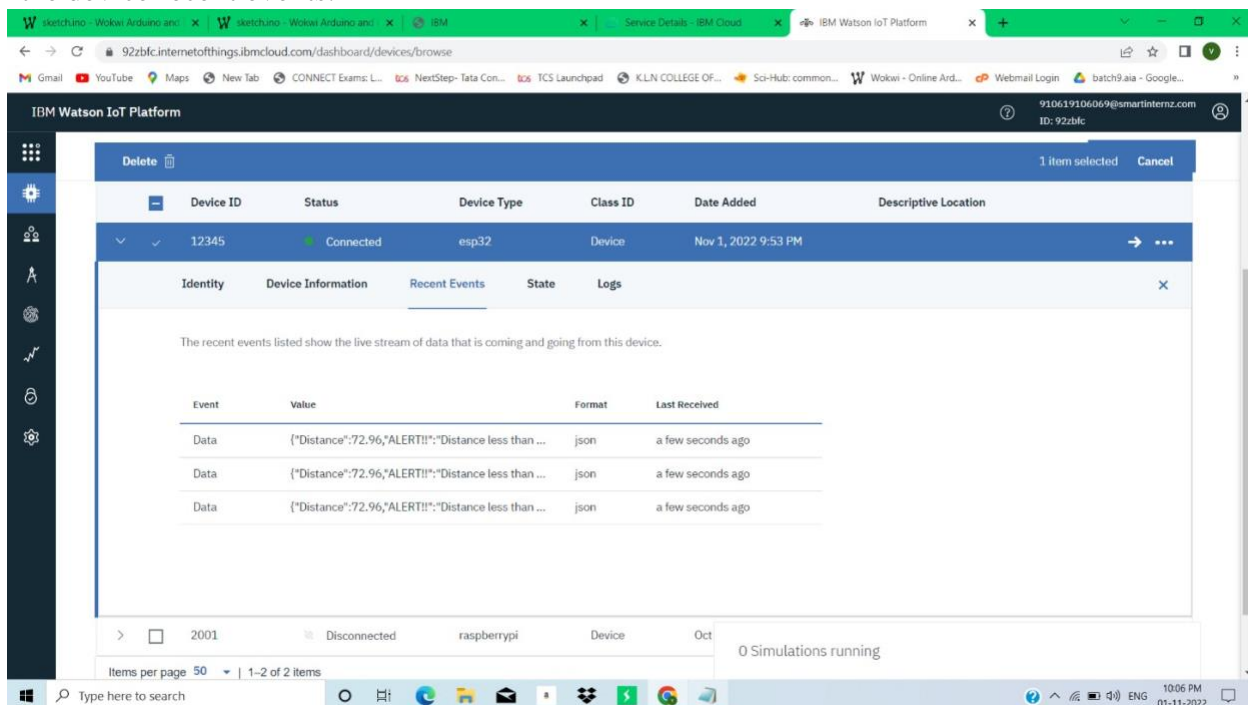

The screenshot shows the IBM Watson IoT Platform dashboard. The device 12345 is connected. The 'Recent Events' tab is selected, showing a list of events triggered by the device.

| Event | Value   | Format | Last Received     |
|-------|---|--------|-------------------|
| Data  | ("Distance":72.96,"ALERT!!":"Distance less than ... | json   | a few seconds ago |
| Data  | ("Distance":72.96,"ALERT!!":"Distance less than ... | json   | a few seconds ago |
| Data  | ("Distance":72.96,"ALERT!!":"Distance less than ... | json   | a few seconds ago |