

# **Real-Time River Water Quality Monitoring and Control System**

## **TEAM MEMBERS :**

- |               |          |
|---------------|----------|
| 1. BALUSAMY V | (BE.ECE) |
| 2. BOOBALAN A | (BE.ECE) |
| 3. DEEPAK R   | (BE.ECE) |
| 4. DHINAKAR   | (BE.ECE) |

## **ABSTRACT:**

Current water quality monitoring system is a manual system with a monotonous process and is very time-consuming. This paper proposes a sensor-based water quality monitoring system. The main components of Wireless Sensor Network (WSN) include a microcontroller for processing the system, communication system for inter and intra node communication and several sensors. Real-time data access can be done by using remote monitoring and Internet of Things (IoT) technology. Data collected at the apart site can be displayed in a visual format on a server PC with the help of Spark streaming analysis through Spark MLlib, Deep learning neural network models, Belief Rule Based (BRB) system and is also compared with standard values. If the acquired value is above the threshold value automated warning SMS alert will be sent to the agent. The uniqueness of our proposed paper is to obtain the water monitoring system with high frequency, high mobility, and low powered. Therefore, our proposed system will immensely help Bangladeshi populations to become conscious against contaminated water as well as to stop polluting the water

## **INTRODUCTION:**

The environment around consists of five key elements e.g., soil, water, climate, natural vegetation, and landforms. Among these water is the utmost crucial element for human life. It is also vital for the persistence of other living habitats [1]. Whether it is used for drinking, domestic use, and food production or recreational purposes, safe and readily available water is the need for public health [2]. So it is highly imperative for us to maintain water quality balance. Otherwise, it would severely damage the health of the humans and at the same time affect the ecological balance among other species [3]. Water pollution is a foremost global problem which needs ongoing evaluation and adaptation of water resource directorial principle at the levels of international down to individual wells. It has been studied that water pollution is the leading cause of mortalities and diseases worldwide. The records show that more than 14,000 people die daily worldwide due to water pollution. In many developing countries, dirty or contaminated water is being used for drinking without any proper prior treatment. One of the reasons for this happening is the ignorance of public and administration and the lack of water quality monitoring system which makes serious health issues.

## **LITERATURE REVIEW:**

In this paper, we depict the design of Wireless Sensor Network (WSN) [4-7] that assists to monitor the quality of water with the support of information sensed by the sensors dipped in water. Using different sensors, this system can collect various parameters from water, such as pH, dissolved oxygen, turbidity, conductivity, temperature, and so on. The rapid development of WSN technology provides a novel approach to real-time data acquisition, transmission, and processing. The clients can get ongoing water quality information from far away. Now a day's Internet of things (IoT) is an innovative technological phenomenon. It is shaping today's world and is used in different fields for collecting, monitoring and analysis of data from remote locations. IoT integrated network is everywhere starting from smart cities, smart power grids, and smart supply chain to smart wearable [7-12]. Though IoT is still under applied in the field of environment it has huge potential. It can be applied to detect forest fire and early earthquake, reduce air pollution, monitor snow level, prevent landslide, and avalanche etc. Moreover, it can be implemented in the field of water quality monitoring and

controlling system [4, 13]. Water quality monitoring has gained more interest among researchers in this twenty-first century. Numerous works are either done or ongoing in this topic focusing on various aspects of it. The key theme of all the projects was to develop an efficient, cost-effective, real-time water quality monitoring system which will integrate wireless sensor network and internet of things [14]. In this research, we monitor the physical and chemical parameters of water bodies inside Chittagong city by using an IoT based sensor network.

## **MATERIALS AND METHODS:**

The design and development of this project are divided into two main parts which are hardware architecture and software details. The main aim is to develop a system for continuous monitoring of river water quality at remote places using wireless sensor networks with low power consumption, low-cost and high detection accuracy. pH, conductivity, turbidity level, etc. are the limits that are analyzed to improve the water quality. Following are the aims of idea implementation (a) To measure water parameters such as pH, dissolved oxygen, turbidity, conductivity, etc. using available sensors at a remote place.

### **1 HARDWARE ARCHITECTURE:**

An Arduino mega is utilized as a core person. The Arduino victimized here is mega 2560 because multiple analog sign sensors probe requisite to be conterminous with the Arduino inhabit. It has a set of registers that use as a solon use RAM. Specific intend to know registers for on-chip component resources are also mapped into the assemblage grapheme. The addressability of store varies depending on instrumentation series and all PIC devices someone several banking mechanisms to utilise addressing to additional faculty. Subsequent series of devices have move instructions which can covert move had to be achieved via the register. Thus the mechanism functions with the exploit of coding intrinsically in the Arduino UNO R3 skate



Figure 1: The Arduino Mega board uses a microcontroller Arduino UNO R3 skate

## PH SENSOR:

The pH of thing is a useful constant to display because graduate and low pH levels can hump large effects on the author. The pH of a statement can grasp from 1 to 14. A pH sensor is an instrumentation that measures the hydrogen-ion density in a bleach, indicating its tartness or alkalinity. Its constitute varies from 0 to 14 pH. Uttermost PH values also process the solubility of elements and compounds making them cyanogenetic. Mathematically pH is referred as,  $\text{pH} = -\log [\text{H}^+]$ .



Figure 2: The Ph Sensor is used to communicate with Arduino board.

### **Turbidity Sensor:**

Turbidity train sensor is victimised to measure the clarity of element or muddiness utter in the water. The muddiness of the open cut food is ordinarily between 255 NTU. Irrigate is visibly at levels above 80 NTU. The standards for intemperance liquid is 130 NTU to 250 NTU. The turbidity device consists of soft sender and acquirer, the transmitter needs to transmit unsubtle bright, it is said to be turbid. The consequence of turbidity is a reduction in water clarity, aesthetically unpleasant, decreases the rate of photosynthesis, increases water temperature.



Figure 3: The Turbidity Sensor

### **LCD Display:**

LCD (Liquid Crystal Display) impede is a flat brace electronic exhibit power and finds in a countywide orbit of applications. A 16x2 LCD demo is the really fundamental power and is rattling commonly victimised in varied devices and circuits. These modules are desirable over heptad segments and otherwise multi-segment LEDs.



Figure: The LCD Display.

## BLOCK DIAGRAM:

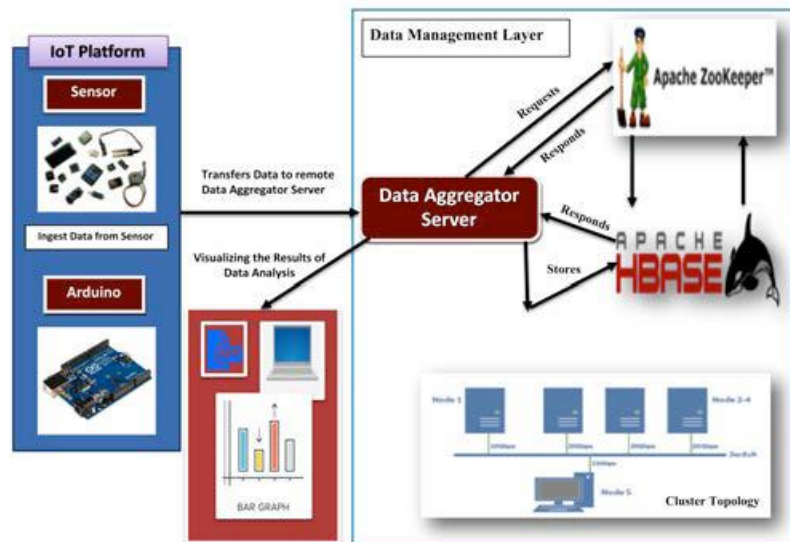


Figure 5: Block diagram of the River Monitoring System

## SOFTWARE DEVELOPMENT:

The proposed water quality monitoring system based on WSN can be divided into three parts: IoT platform, Neural network models in Big Data Analytics and water quality management, Real-time monitoring of water quality by using IoT integrated Big Data Analytics. The quality parameters are labeled datasets including desired outputs of specific combination of inputs. The neural network will produce output to classify water quality as dangerous, be careful, and good. The classification layer will run on top of Hadoop cluster [17]. The advantages of using neural network based analytics are like Artificial Neural Networks (ANNs) are good in learning and modeling non-linear relationships, and high volatile data [18]. Though neural networks are prone to over fitting, the neural network model used in water quality monitoring system is not complex enough to cause over fitting problem. Also, there are many countermeasures to avoid over fitting. Also, computation overload is not going to delay the response of system as there are only a few water quality parameters

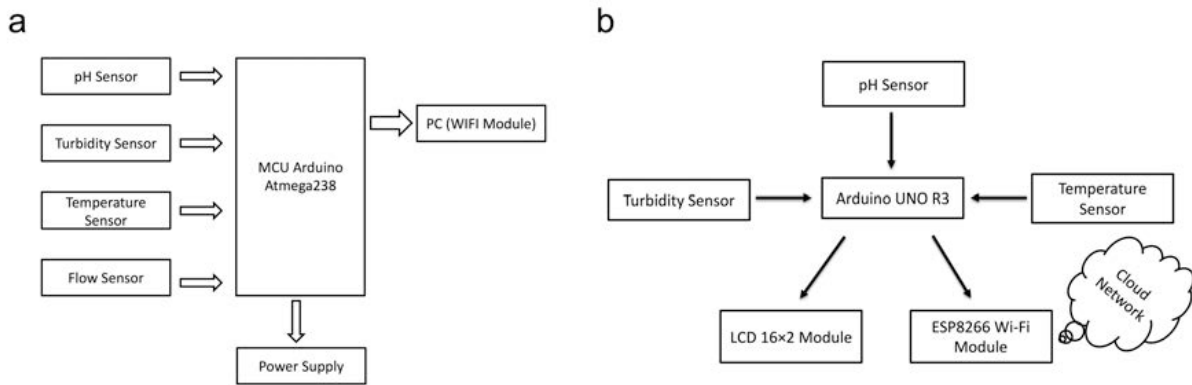


Figure 6: Flowchart of the River Water Monitoring System.

## CONCLUSIONS:

This project has been made to Real-time monitoring of water quality by using IoT integrated Big Data Analytics will immensely help people to become conscious against using contaminated water as well as to stop polluting the water. The research is conducted focusing on monitoring river water quality in real-time. Therefore, IoT integrated big data analytics is appeared to be a better solution as reliability, scalability, speed, and persistence can be provided. During the project development phase an intense comparative analysis of real-time analytics technologies such as Spark streaming analysis through Spark MLlib, Deep learning neural network models, and Belief Rule Based (BRB) system will be conducted. This research would recommend conducting systematic experimentation of the proposed technologies in diverse qualities of river water in Bangladesh. Due to the limitation of the budget, we only focus on measuring the quality of river water parameters. This project can be extended into an efficient water management system of a local area. Moreover, other parameters which wasn't the scope of this project such as total dissolved solid, chemical oxygen demand and dissolved oxygen can also be quantified. So the additional budget is required for further improvement of the overall system.

## REFERENCES:

- [1] K. S. Adu-Manu, C. Tapparello, W. Heinzelman, F. A. Katsriku, and J.-D. Abdulai, "Water quality monitoring using wireless sensor networks: Current trends and future research directions," *ACM Transactions on Sensor Networks (TOSN)*, vol. 13, p. 4, 2017.
- [2] B. Chen, Y. Song, T. Jiang, Z. Chen, B. Huang, and B. Xu, "Real-time estimation of population exposure to PM<sub>2.5</sub> using mobile- and station-based big data," *Int J Environ Res Public Health*, vol. 15, Mar 23 2018.
- [3] B. Paul, "Sensor based water quality monitoring system," BRAC University, 2018.
- [4] K. Andersson and M. S. Hossain, "Smart Risk Assessment Systems using Belief-rule-based DSS and WSN Technologies", in 2014 4th International Conference on Wireless Communications, Vehicular Technology, Information Theory and Aerospace and Electronic Systems, VITAE 2014 : Co-located with Global Wireless Summit, Aalborg, Denmark 11-14 May 2014, 2014
- [5] H. R. Maier and G. C. Dandy, "The use of artificial neural networks for the prediction of water quality parameters," *Water resources Research*, vol. 32, pp. 1013-1022, 1996.
- [6] N. Chilamkurti, S. Zeadally, A. Vasilakos, and V. Sharma, "Cross-layer support for energy efficient routing in wireless sensor networks," *Journal of Sensors*, vol. 2009, 2009