

# **BANNARI AMMAN INSTITUTE OF TECHNOLOGY**

**SATHYAMANGAM-638401**

(An Autonomous Institution Affiliated to Anna University, Chennai)

## **IOT Based Safety Gadget for Child Safety Monitoring and Notification**



TITLE	IOT Based Safety Gadget For Child Safety Monitoring And Notification
DOMAIN NAME	INTERNET OF THINGS
TEAM ID	PNT2022TMID01821
TEAM LEADER NAME	SABARINATHAN G
TEAM MEMBER NAME	PATHMALOSHAN C PRANEETH R RITHIK M

# CONTENT

## 1. INTRODUCTION

Project Overview

Purpose

## 2. LITERATURE SURVEY

Existing problem

References

Problem Statement Definition

## 3. IDEATION & PROPOSED SOLUTION

Empathy Map Canvas

Ideation & Brainstorming

Proposed Solution

Problem Solution fit

## 4. REQUIREMENT ANALYSIS

Functional requirement

Non-Functional requirements

## 5. PROJECT DESIGN

Data Flow Diagrams

Solution & Technical Architecture

User Stories

## 6. PROJECT PLANNING & SCHEDULING

Sprint Planning & Estimation

Sprint Delivery Schedule

## 7. CODING & SOLUTIONING (Explain the features in the project along with code)

Feature code 1

Feature code 2

## **8. TESTING**

Test Cases

User Acceptance Testing

## **9. RESULTS**

Performance Metrics

## **10. ADVANTAGES & DISADVANTAGES**

## **11. CONCLUSION**

## **12. FUTURE SCOPE**

## **13. APPENDIX**

Source Code

GitHub & Project Demo Link

# **1. INTRODUCTION:**

## **Project Overview:**

Internet of Things (IoT) is a set of systems and devices interconnected with real-world sensors and actuators to the Internet. It is able to make decisions via detecting the surrounding environment without human interaction. In this project, IoT is applied to propose which helps parents to monitor and get known of their child's condition at anywhere and anytime even if they are not by their children side, Via the IoT, children safety is guaranteed, and crime rate is reduced as immediate actions can be taken in case the child is in danger. The use of IoT in this device is motivated by the need of child security system. Enable tracking of the child's location and capturing of data remotely such as temperature, Latitude and Longitude .To show the child's actual data with reference values. Enable sending of notification if the child is out of location or when the device realizes abnormal conditions/situations. Then, emergency notification will be sent to and display in the parents' mobile apps. Cloud computing means shared computing resources (networks, servers, storages, applications, services) are delivered as a service over the Internet from cloud to parent's. According to cloud is an interconnected network of servers providing services for people. With the help of cloud we store the entire location data.

## **Purpose:**

It assists parents to monitor their children remotely. In case situations happen, notifications will be sent to parents so that actions can be taken. Through this child safety can be ensured and crime rate will be reduced. Parent's concentrate to their works without worrying about their children.

## **2. LITERATURE SURVEY:**

### **Existing problem:**

#### **Paper 1:**

The tracking system is used to track moving individuals and provide an instant timeline of position information for tracking analysis. People Tracking System in the crowd for Smart Cities is a mobile application that allows parents to monitor the location of their children in a crowded environment. Besides children, there are also elderly and disabled people, so the person responsible for them can use this application to track their location. The parents have the application in which they can track the location and on the other hand, the child or the old person or the disabled person has a device that contains the Global Positioning System chip. The main objective of this study is to design an application with the system that will help the parents to track their children to reduce the cases where the children or the other mentioned categories of people might get lost. The current solution to this problem is that the children first have a wearable wrist where they imprint the phone number of their parents so that if the child is lost, there is an office where the child is taken and taken care of until they contact the parents to come and pick up the child. The problem with the current way that it takes time and there is a risk that child will be lost or kidnapped before ever reaching for any help, so the new way is better to also prevent them from going far away or being lost for hours, so the recovery here will be quick unlike the regularly used way today. This goal will be achieved by systematic objectives, starting from studying the existing systems, planning, and analyzing, designing, and implementing, and finally testing the proposed system.

#### **Paper 2:**

Recently, all over the world, crime against children is increasing at higher rates and it is high time to offer safety support system for the children going to schools. This paper focuses on implementing children tracking system for every child attending school. However the existing systems are not powerful enough to prevent the crime against children since these systems give information about the children group and not about each child resulting in low assurance about their

child safety to parents and also does not concentrate on sensing the cry of the child and intimating the same to its parents. The proposed system includes a child module and two receiver modules for getting the information about the missed child on periodical basis. The child module includes ARM7 microcontroller (lpc 2378), Global positioning system (GPS), Global system for mobile communication (GSM), Voice playback circuit and the receiver module includes Android mobile device in parent's hand and the other as monitoring database in control room of the school. Finally, implementation results for the proposed system are provided in this paper.

### Paper 3:

What the world is seeing about the deterioration of public safety in various cities and the increase in the rate of crimes against children makes parents constantly worry about their children when they go to school and until they return from it. To dispel these fears, the idea emerges to create an application that allows parents to know the whereabouts of their children and notify them with a message if the children exceed the area specified for them. In this application, the process of discovering the child's precise location in a specific area is carried out by determining the latitude and longitude using the GSM radio navigation system. After that, the mobile receives all the information about the location via the GSM modem. A GSM modem has been programmed to achieve communication between the modem and the child by two methods of communication through which the child's location is determined. Ensuring that the child's location is known at any time and informing the person responsible for tracking him is the primary function of this system. This device connects to the child in an appropriate manner and it turns on when the child exits the designated area for him, after which a message is sent to the tracker. The device can be triggered using a short messaging system (SMS) where the user can communicate remotely to the GSM using a mobile.

### Paper 4:

Recently, all over the world, crime against children is increasing at higher rates and it is high time to offer safety support system for the children going to schools. This paper focuses on implementing children tracking system for every child attending school. However the existing systems are not powerful enough to prevent the crime against children since these systems give information about the children group and not about each child resulting in low assurance about their

child safety to parents and also does not concentrate on sensing the cry of the child and intimating the same to its parents. The proposed system includes a child module and two receiver modules for getting the information about the missed child on periodical basis. The child module includes ARM7 microcontroller (lpc 2378), Global positioning system (GPS), Global system for mobile communication (GSM), Voice playback circuit and the receiver module includes Android mobile device in parent's hand and the other as monitoring database in control room of the school. Finally, implementation results for the proposed system are provided in this paper.

#### Paper 5:

Nowadays, crime rate associated with children keeps increasing due to which draws peoples' attention regarding child safety. This research is conducted to propose a child security smart band utilizing IOT technology. Online questionnaire and semi-structured interview are methodologies used to collect data. The online questionnaire gains feedbacks by sending questions electronically, where answers need to be submitted online. In the semi structured interview, researcher meets and asks respondents some predetermined questions while other being asked are not planned in advanced. Through information obtained, a smartband have been proposed to monitor the safety of children. By this, parents know what is happening remotely and can take actions if something goes wrong. The future improvements of this device will be adding functions and software to make it works like a phone such as messaging, gallery, Google, YouTube, meanwhile, adding more child security features so that child safety is guaranteed.

#### Paper 6:

Now-a-days attacks on children are increasing at an unprecedented rate and the victims are in dangerous conditions, where they are not allowed to contact the family members. The key idea planned in this research work is an advanced technology that offers "Smart Child Safety" for the children. Therefore, the awareness of this method is to send an SMS from children's wear tool to their parent or guardian. In the prevailing structure, there is no monitoring method for child, it should create many problems for them and the no protection mechanism to protect the child from the misbehavior. In addition, there is no aware device for the child's protection; it must be completed by hand only. Thus, the planned method will be highly effective when compared to the other existing techniques in

helping the victims. Moreover, it doesn't need any manual operation. This paper recommends a newfangled technology for child protection by using GSM so that the children will not feel abandoned while facing such social problems. The problems overawed here using Arduino UNO, GSM, sensors, MEMS, temperature and panic button by using IOT. In such case, Heartbeat Sensor tracks the best rate for children and sends the emergency message by using the GSM to save contacts. Such method is actually supportive for children in today's world. Hence, this provides a security to the children and secures the feeling of parents.

#### Paper 7:

Today, technology is growing rapidly and providing all essential and effective solutions for every requirement. Now a day's child security is an important area of concern. This model is developed to rectify the worries of parents regarding their child security. In this scenario, our system ensures maximum security and ensures live tracking for their kids because parent worries are genuine. This paper proposed a model for child safety through smart phones that provides the option to track the location of their children as well as in case of emergency children is able to send a quick message and its current location via Short Message services. This proposed system is validated by testing on the Android platform.

#### Paper 8:

Safety of a child in a large public event is a major concern for event organizers and parents. This paper addresses this important concern and proposes an architecture model of the IOT-enabled smart child safety tracking digital system. This IOT-enabled digital system architecture integrates the Cloud, Mobile and GPS technology to precisely locate the geographical location of a child on an event map. The proposed architecture model describes the people, information, process, and technology architecture elements, and their relationships for the complex IOT-enabled smart child safety tracking digital system. The proposed architecture model can be used as a reference or guide to assist in the safe architecture driven development of the various child tracking digital systems for different public events.



#### Paper 9:

The objective of this project is to safeguard the child from threats. Now a day the safety measures of children have been reduced in huge number. Thus the violence against children increasing day by day. Not only kids even women are also abused both physically and mentally. We are taking small step towards violence against the kids. Our project mainly focus on sensing the children's Temperature and Heartbeat. By monitoring the activities the state of the child is analyzed. By using GSM, if child reaches the critical state then the latitude and longitude of that particular location is sent as an alert message to the parents. In this system, it has a MEMS sensor which is used to detect the abnormal vibration and it is controlled by NodeMCU micro controller.

#### Paper 10:

The objective of this project is to safeguard the child from threats. Now a day the safety measures of children have been reduced in huge number. Thus the violence against children increasing day by day. Not only kids even women are also abused both physically and mentally. We are taking small step towards violence against the kids. Our project mainly focus on sensing the children's Temperature and Heartbeat. By monitoring the activities the state of the child is analyzed. By using GSM, if child reaches the critical state then the latitude and longitude of that particular location is sent as an alert message to the parents.

## References:

### Paper 1:

Designing and implementing the people tracking system in the crowded environment using mobile application for smart cities. The Society for Reliability Engineering, Quality and Operations Management (SREQOM), India and The Division of Operation and Maintenance, Lulea University of Technology, Sweden 2021

### Paper 2:

Proceedings of the 3rd International Conference on Integrated Intelligent Computing. Communication & Security (ICIIC 2021)IoT-based Child Security Monitoring System

### Paper 3:

Design and Implementation of a Smart System for School Children Tracking

### Paper 4:

Design and Implementation of Children Tracking System using ARM7 on Android Mobile Terminals(September-2014)

### Paper 5:

Proceedings of the 3rd International Conference on Integrated Intelligent Computing Communication & Security (ICIIC 2021) -IOT-based Child Security Monitoring System

### Paper 6:

Proceedings of the Third International Conference on Intelligent Communication Technologies and Virtual Mobile Networks (ICICV 2021).Design of Wearable Device for Child Safety

Paper 7:

2016 Second International Conference on Computational Intelligence & Communication  
Technology- Child Safety & Tracking Management System

Paper 8:

2020 IEEE 14th International Conference on Semantic Computing (ICSC) -IOT-enabled SmartChild Safety  
Digital System Architecture

Paper 9:

Child Safety Wearable Device.(March 2019)

Paper 10:


International Conference on Electrical Engineering and Computer science 2018, An IntegratedChild  
Safety using Geo-fencing Information on Mobile Devices

### **Problem Statement Definition:**

1. Child tracker helps the parents in continuously monitoring the child's location.
2. They can simply leave their children in school or parks and create a geofence around the particular location.
3. By continuously checking the child's location notifications will be generated if the child crosses the geofence.
4. Notifications will be sent according to the child's location to their parents or caretakers.
5. The entire location data will be stored in the database.

### 3. IDEATION AND PROPOSED SOLUTION:

#### Empathy Map Canvas

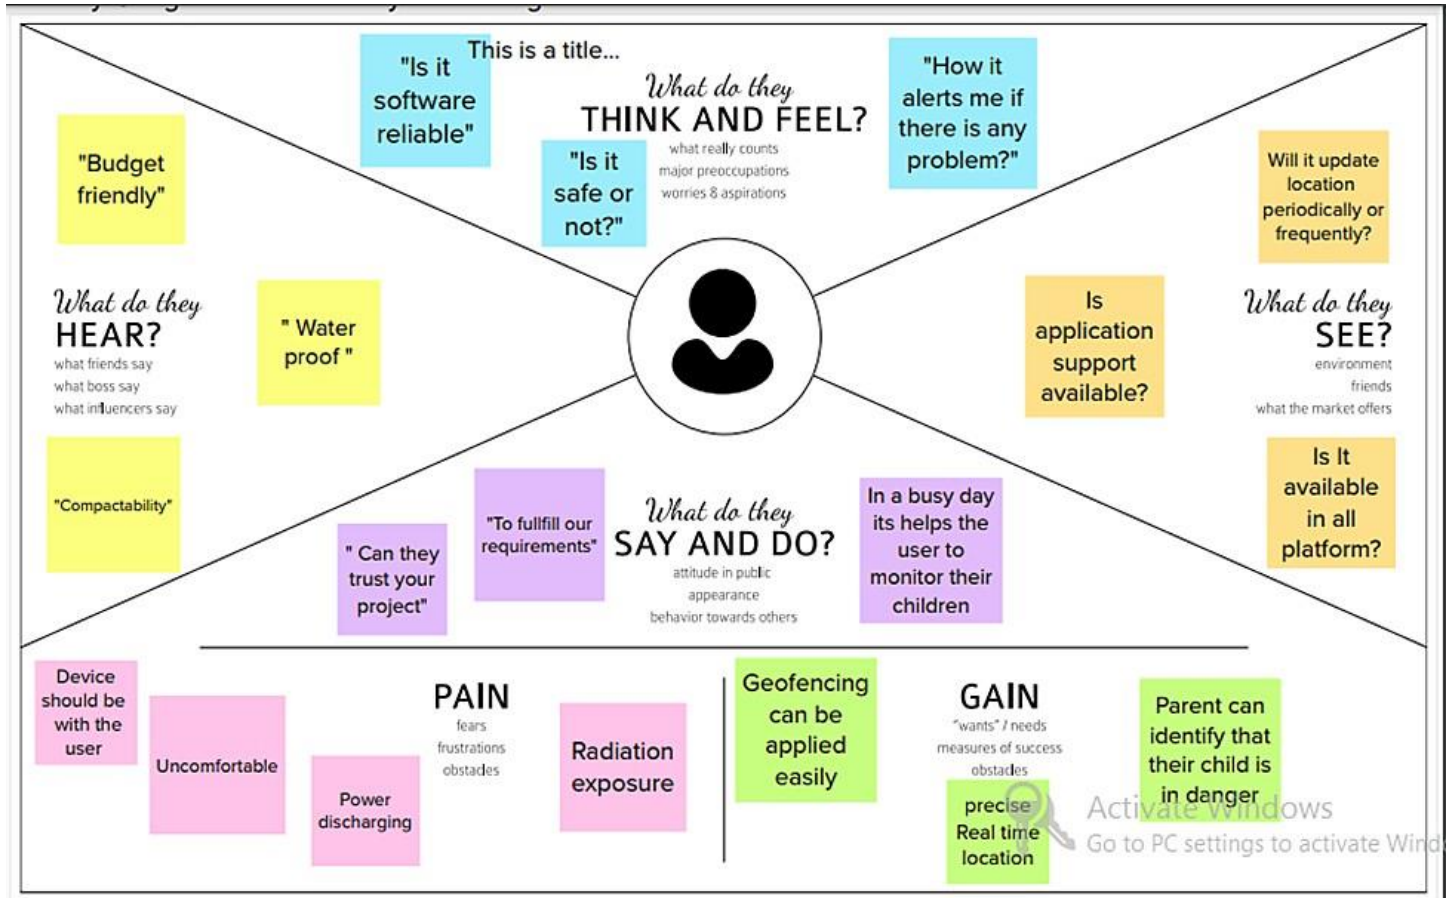


# Ideation and Brainstorming

4

## Prioritize

Your team should all be on the same page about what's important moving forward. Place your ideas on this grid to determine which ideas are important and which are feasible.

20 minutes

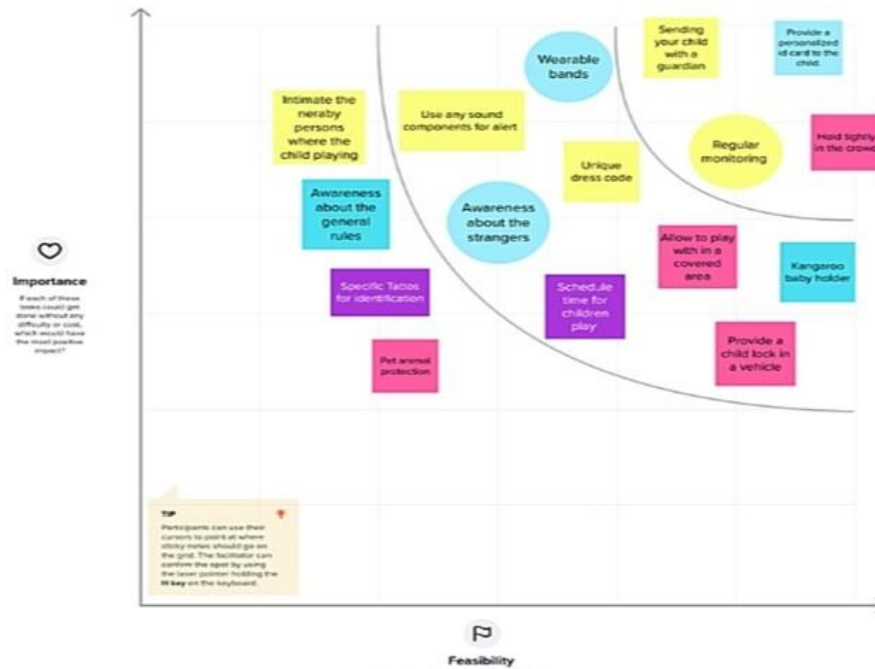

5

## After you collaborate

You can export the mural as an image or pdf to share with members of your company who might find it helpful.

### Quick add-ons

- 1 **Share the mural**  
Share a view link to the mural with stakeholders to keep them in the loop about the outcomes of the session.
- 2 **Export the mural**  
Export a copy of the mural as a PNG or PDF to attach to emails, include in slides, or save in your drive.

### Keep moving forward

- Strategy blueprint**  
Define the components of a new idea or strategy.  
[Open the template](#)
- Customer experience journey map**  
Understand customer needs, motivations, and obstacles for an experience.  
[Open the template](#)
- Strengths, weaknesses, opportunities & threats**  
Identify strengths, weaknesses, opportunities, and threats (SWOT) to develop a plan.  
[Open the template](#)

[Share template feedback](#)

## Proposed Solution

S.No.	Parameter	Description
1.	Problem Statement(Problem to be solved)	<ol style="list-style-type: none"><li>1. Child tracker helps the parents in continuously monitoring the child's location.</li><li>2. They can simply leave their children in school or parks and create a geofence around the particular location.</li><li>3. By continuously checking the child's location notifications will be generated if the child crosses the geofence.</li><li>4. Notifications will be sent according to the child's location to their parents or caretakers. The entire location data will be stored in the database</li></ol>
2.	Idea/Solution description	<ol style="list-style-type: none"><li>1. Without any Interruption of miscellaneous signal for better performance.</li><li>2. It should be compact and it is mostly a wearable one.</li></ol>
3.	Novelty/ Uniqueness	<ol style="list-style-type: none"><li>1. If the children cross the geofence area , Snapshot of the current location of the child is notify to the parents.</li><li>2. Without internet the device should be communicate within a short range.</li></ol>

4.	Social Impact/ Customer Satisfaction	<ol style="list-style-type: none"> <li>1. Parents do their work properly and peacefully.</li> <li>2. Without disturbing the parents work ,onlythe device alert when the child crosses the geofence.</li> </ol>
5.	Business Model(Revenue Model)	<ol style="list-style-type: none"> <li>1. The cost of the device is satisfactory toboth Customer and the manufacturer.</li> </ol>
6.	Scalability of the Solution	<ol style="list-style-type: none"> <li>2. To made a separate device for control the gadget.</li> <li>3. It transmits the messages even in a hill regions.</li> </ol>

# Problem Solution Fit

Project Title: Child safety gadget for child monitoring

Project Design Phase-I - Solution Fit Template

Define CS, fit into CC	<b>1. CUSTOMER SEGMENT(S)</b> <span>CS</span> <ul style="list-style-type: none"> <li>Parents of 1-10 year old childrens</li> <li>Guardians of the childrens</li> </ul>	<b>5. CUSTOMER CONSTRAINTS</b> <span>CC</span> <ul style="list-style-type: none"> <li>Low power consumption,</li> <li>Long battery life,</li> <li>Budget</li> <li>Network connection</li> <li>Compact</li> </ul>	<b>8 AVAILABLE SOLUTIONS :</b> <span>AS</span> <ul style="list-style-type: none"> <li>When the coustomer loss the child we have to see the location of the child using our gadget and then they find the children.</li> </ul>	Explore AS, differentiate

Focus on J&P, fit into BE, understand RC	<b>2. JOBS-TO-BE-DONE / PROBLEMS</b> <span>J&amp;P</span> <ul style="list-style-type: none"> <li>Continuosly monitoring location of the child.</li> <li>Send alert notifications to the parents if their children cross the geofense.</li> </ul>	<b>6. PROBLEM ROOT CAUSE</b> <span>RC</span> <ul style="list-style-type: none"> <li>The main reason for this problem is losing or missing their child</li> </ul>	<b>9. BEHAVIOUR</b> <span>BE</span> <ul style="list-style-type: none"> <li>Continuosly monitoring location of the child using the gadget.</li> <li>Send the alert notifications to the parents or guardians if they cross the limit.</li> </ul>	Focus on J&P, fit into BE, understand RC

Activate Windows  
Go to PC settings to activate Win

<b>3. TRIGGERS</b> <span>TR</span> <ul style="list-style-type: none"> <li>Lossing of child</li> <li>Fear of losing the child</li> </ul>	<b>7. YOUR SOLUTION</b> <ul style="list-style-type: none"> <li>When they lost their child they find their child by using this gadget.</li> <li>By Continuously monitoring the child location.</li> </ul>	<b>9.CHANNELS of BEHAVIOUR</b> <span>CH</span> <ul style="list-style-type: none"> <li>Online : There should be internet connection for monitoring the child current location.</li> <li>Offline :Sending msg to the users when their child cross the geofense area.</li> </ul>
<b>4. EMOTIONS: BEFORE / AFTER</b> <ul style="list-style-type: none"> <li>Parents are lack of confidence,emotionally unsatable,panic and they fear about the child future while they lost their child.</li> <li>They feel happy and relaxed after they find the child.</li> </ul>		



## 4. REQUIREMENT ANALYSIS:

### Functional Requirements:

Following are the functional requirements of the proposed solution.

FR No.	Functional Requirement (Epic)	Sub Requirement (Story / Sub-Task)
FR-1	Communicate and exchange information to provide server for user	<ol style="list-style-type: none"><li>1. To monitor the children's location continuously in schools or parks.</li><li>2. Alert the parent if the child crosses the geofence through SMS.</li></ol>
FR-2	Continuous monitoring	<ol style="list-style-type: none"><li>1. Create the geofence around child location.</li><li>2. Continuously monitoring the child location.</li><li>3. Notifications send when child cross the geofence and child face any issues.</li></ol>
FR-3	User requirement	<ol style="list-style-type: none"><li>1. Easily upgrade to any environments.</li><li>2. Easy to handle.</li><li>3. Gives more accuracy.</li><li>4. Low power consumption.</li></ol>



FR-4	Mandatory	<ol style="list-style-type: none"> <li>1. The system will send the detail of location information the system via 3Gnetwork or Wi-Fi.</li> <li>2. Accuracy of location is important.</li> <li>3. The system should be scalable.</li> <li>4. The entire location data will be stored</li> </ol>
FR-5	Testing  Set the geofence.	<ol style="list-style-type: none"> <li>1. The device is kept together with the children.</li> <li>2. Create geofence around the child location in school or parks, if child crosses the geofence notify to the parents</li> <li>3. Notifications sent in the form of SMS.</li> </ol>

## Non-Functional Requirements :


FR No.	Non-Functional Requirement	Description
NFR-1	<b>Usability</b>	<ol style="list-style-type: none"><li>1. High usability of user experience design for user,</li><li>2. Which is usable for finding the children if they lost.</li></ol>
NFR-2	<b>Security</b>	<ol style="list-style-type: none"><li>1. The system can accessed by authorized persons only.</li></ol>
NFR-3	<b>Reliability</b>	<ol style="list-style-type: none"><li>1. Monitoring the location continuously and easy to upgrade the system .</li></ol>
NFR-4	<b>Performance</b>	<ol style="list-style-type: none"><li>1. The performance should be more effective and efficient.</li><li>2. The location data will be stored.</li></ol>
NFR-5	<b>Availability</b>	If we are going to upgrade the system or make any changes in the the system it will not take much time to recovery.
NFR-6	<b>Scalability</b>	<ol style="list-style-type: none"><li>1. The website traffic limit must be scalable enough to</li><li>2. support users at a time.</li></ol>

## 5. PROJECT DESIGN

### Data Flow Diagrams:

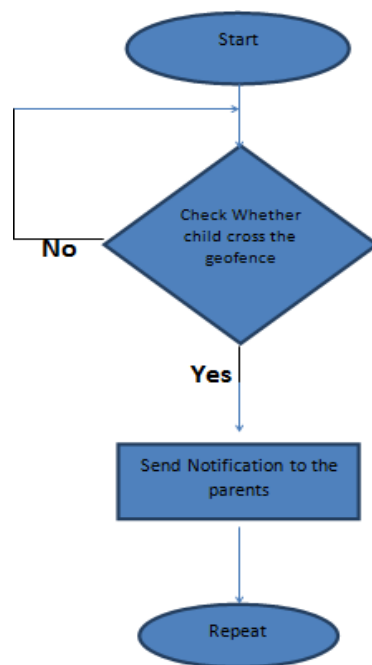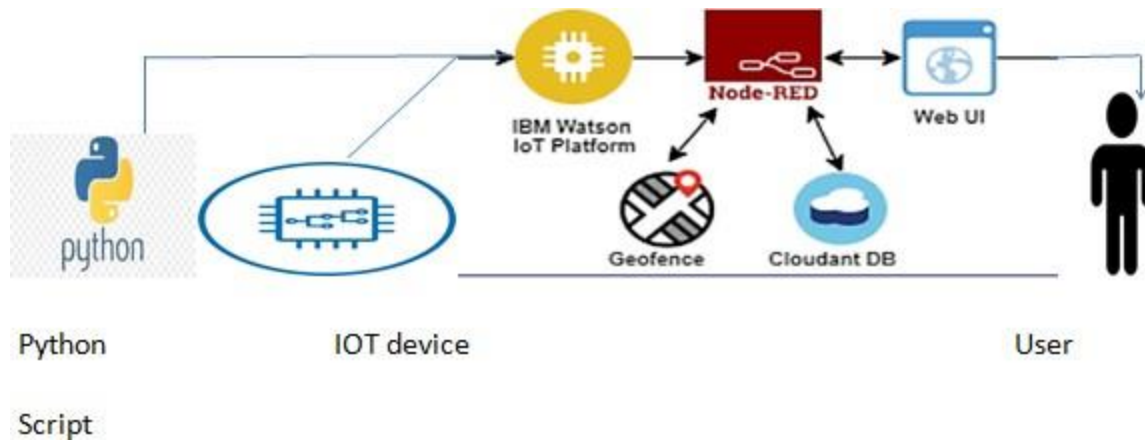

## Technical Architecture:

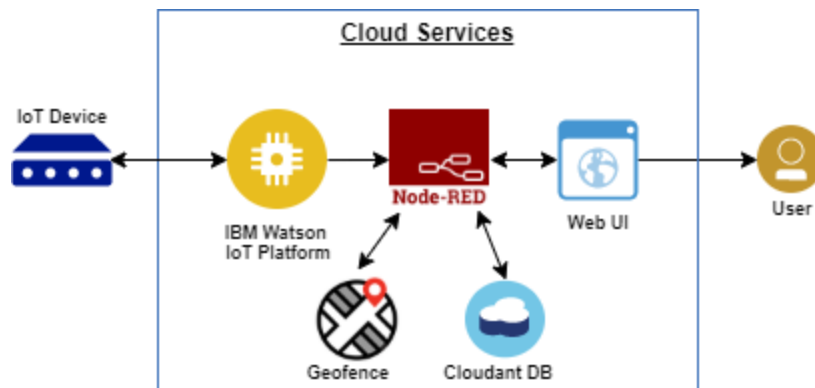

1. Feed the data from the GPS placed in the Device to the web interface.
2. The data will display in the web page of the authority(user)
3. The collected data is sent to the data base, where the collected location and pre defined geophone location are checked and monitored if the child cross the geophone notificationsends to the parents.
4. The location data is provided to the cloud service and stored
5. The authority monitors the web page continuously to collect the locationdata and send the alert to the authority

## Components and Technologies:

S.No	Components	Description	
1	User Interface	Users had to register and outlook the other device's location Web UI, Mobile App, etc.	HTML, CSS
2	Application Logic-1	Registration of child's and parent's device in each other device.	python
3	Application Logic-2	The child's GPS should be in ON condition, Parent's device should always be correlated to Child's appliance	IBM Watson STT service IBM Watson Assistant
4	Application Logic-3	he child's GPS should be in ON condition, Parent's device should always be correlated to Child's appliance	IBM Watson Assistant IBM Watson STT Service
5	Database	Data Type can be any configuration such as arbitrary binary data, or text. Location history is stored in the cloud and the values include distance, latitude, and longitude. A user-defined blob of data transmitter from Cloud IoT Core to a device	MySQL, NoSQL, SQLite.
6	File Storage	Files will be labelled with what they encompass and how long they should be kept.	IBM Block Storage or Other Storage Service or Local Filesystem
7	Cloud Database	Users install tracking software on a cloud infrastructure to perpetrate the database	IBM DATA BASE
8	External API	The purpose of the external API employed in the device is to exploit the internet for communicating and executing allotted operations efficiently	IBM Weather API, Aadhar API, Geo-Location Lookup
9	Machine Learning Model	IoT and machine learning deliver insights otherwise hidden in data for prompt, automated retorts and enhanced governing.	Object Recognition Model, Danger Prediction Model.
10	Infrastructure (Server / Cloud)	Application Deployment on Local System / Cloud Local Server chassis: Wearable high-tech mechanism. Cloud Server Configuration: a tremendous network that reinforces IoT devices and applications	Local, Cloud Foundry, Underlying Infrastructure.

### Application Characteristics:

S.No	Characteristics	Description	Technology
1.	Open source Frameworks	Tracking the location of children	Random data in python script.
2.	Security Implementation	Device ID, IBM cloud and Watson account.	Eg.SHA-256,Encryptions,IAM controls, OWSAP etc.
3.	Scalable Architecture	Upgrade	IBM cloud
4.	Availability	The app contains the Location data of the children.	GPS, Python script
5.	Performance	The system continuously updates the location data and if the children cross the geofence it will show alert.	Mobile app, Web UI

## User Stories:

User Type	Functional Requirement (Epic)	User Story Number	User Story / Task	Acceptance criteria	Priority	Release
Customer (Parent/Guardian )	Registration	USN-1	As a user, i can login my email	Now i can get the confirmation from login credentials	Low	Sprint-2
		USN-2	As a user, I will connect to the application	With the login id ,I access to the device	High	Sprint-1
		USN-3	As a user my location gets automatically detected and updated from database	Now I can monitor the child's location using the device	Medium	Sprint-2
		USN-4	As a user, if the device crosses the geofencing area	Now I can receive the alert message from the device	High	Sprint-1



## 6. PROJECT PLANNING AND SCHEDULING:

### Sprint Planning and Estimation:

#### Product Backlog, Sprint Schedule, and Estimation

Use the below template to create product backlog and sprint schedule

Sprint	Functional Requirement (Epic)	User Story Number	User Story / Task	Story Points	Priority	Team Members
Sprint-1	Registration	USN-1	As a user, I can register for the application by entering my email, password, and confirming my password.	2	High	Dharshanraj V
Sprint-1		USN-2	As a user, I will receive confirmation email once I have registered for the application	1	High	Chinnan S
Sprint-2		USN-3	As a user, I can register for the application through Facebook	2	Low	Keerthiprasath S
Sprint-1		USN-4	As a user, I can register for the application through Gmail	2	Medium	Koushik R P
Sprint-1	Login	USN-5	As a user, I can log into the application by entering email & password	1	High	Dharshanraj V

#### Project Tracker, Velocity & Burn down Chart:



Sprint	Total Story Points	Duration	Sprint Start Date	Sprint End Date (Planned)	Story Points Completed (as on Planned End Date)	Sprint Release Date (Actual)
Sprint-1	20	6 Days	24 Oct 2022	29 Oct 2022	20	29 Oct 2022
Sprint-2	20	6 Days	31 Oct 2022	05 Nov 2022	30	05 Nov 2022
Sprint-3	20	6 Days	07 Nov 2022	12 Nov 2022	40	11 Nov 2022
Sprint-4	20	6 Days	14 Nov 2022	19 Nov 2022	50	16 Nov 2022

## Velocity:

Imagine we have a 10-day sprint duration, and the velocity of the team is 20 (points per sprint). Let's calculate the team's average velocity (AV) per iteration unit (story points per day)

$$AV = \frac{\text{sprint duration}}{\text{velocity}} = \frac{20}{10} = 2$$

## BURNDOWN

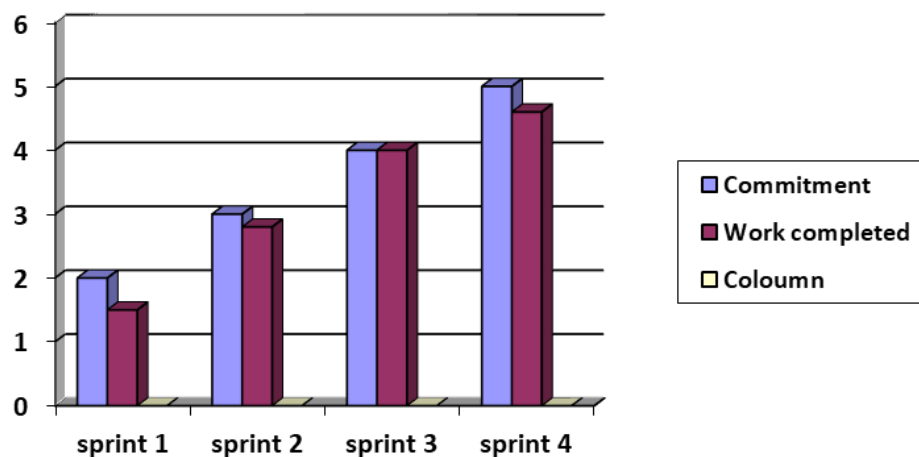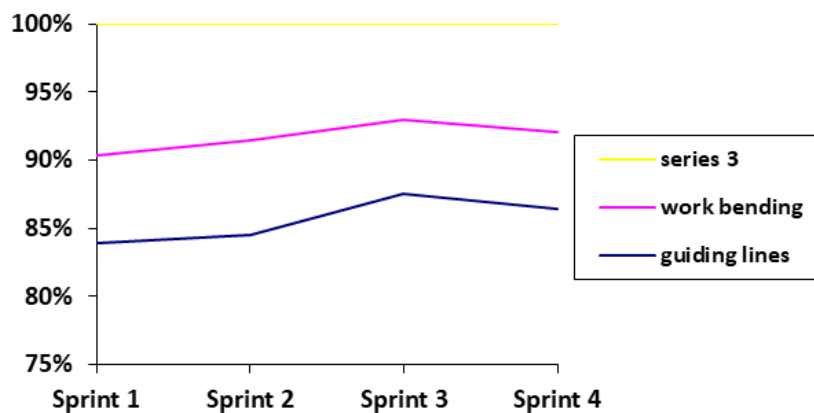

## 6.3 Report From JIRA

This screenshot shows the Jira interface for a project named "safety gadget for child safety monitoring". The left sidebar contains navigation options: "PLANNING" (Roadmap, Backlog, Board) and "DEVELOPMENT" (Code). The main area displays the "Backlog" view. At the top, there's a search bar and a "Create" button. Below the project name, the "Backlog" section shows two sprints: "SGFCM Sprint 1" and "SGFCM Sprint 2". Each sprint has a "Start sprint" button and a "Create issue" link. The first sprint contains one issue, "SGFCM-1 As a user, I can register for the application by entering my email, password, and confirming my password." The second sprint contains one issue, "SGFCM-2 As a user, I can register for the application through Facebook". A "Quickstart" button is visible in the bottom right corner.

Projects / safety gadget for child safety monitoring

### Backlog

SGFCM Sprint 1 Add dates (1 issue) 0 0 0 Start sprint

SGFCM-1 As a user, I can register for the application by entering my email, password, and confirming my password.

+ Create issue

SGFCM Sprint 2 Add dates (1 issue) 0 0 0 Start sprint

SGFCM-2 As a user, I can register for the application through Facebook

+ Create issue

SGFCM Sprint 3 Add dates (1 issue) 0 0 0 Start sprint

Quickstart

This screenshot shows the Jira interface for the same project, "safety gadget for child safety monitoring". The left sidebar is identical to the previous screenshot. The main area displays the "Backlog" view. The "Backlog" section now shows two sprints: "SGFCM Sprint 3" and "SGFCM Sprint 4". Each sprint has a "Start sprint" button and a "Create issue" link. The third sprint contains one issue, "SGFCM-3 As a user, I can register for the application through Gmail". The fourth sprint contains one issue, "SGFCM-4 As a user, I can log into the application by entering email & password". A "Quickstart" button is visible in the bottom right corner.

Projects / safety gadget for child safety monitoring

### Backlog

SGFCM Sprint 3 Add dates (1 issue) 0 0 0 Start sprint

SGFCM-3 As a user, I can register for the application through Gmail

+ Create issue

SGFCM Sprint 4 Add dates (1 issue) 0 0 0 Start sprint

SGFCM-4 As a user, I can log into the application by entering email & password

+ Create issue

Backlog (0 issues) 0 0 0 Create sprint

Quickstart

Jira

Your work

Projects

Filters

Dashboards

People

Apps

Create

Q Search

safety gadget for child...

Software project

PLANNING

Roadmap

Backlog

Board

DEVELOPMENT

Code

Project pages

Add shortcut

Project settings

You're in a team-managed project

Learn more

Projects / safety gadget for child safety monitoring

All sprints

K

KP

C

Sprint 4

Clear filters

GROUP BY

None

Insights

Complete sprint

TO DO 2 OF 2 ISSUES

As a user, I can register for the application through Gmail

SGFCM-3

As a user, I can log into the application by entering email & password

SGFCM-4

IN PROGRESS 2 OF 2 ISSUES

As a user, I can register for the application by entering my email, password, and confirming my password

SGFCM-1

As a user, I can register for the application through Facebook

SGFCM-2

DONE

Quickstart

Jira

Your work

Projects

Filters

Dashboards

People

Apps

Create

Q Search

safety gadget for child...

Software project

PLANNING

Roadmap

Backlog

Board

DEVELOPMENT

Code

Project pages

Add shortcut

Project settings

You're in a team-managed project

Learn more

Projects / safety gadget for child safety monitoring

Roadmap

Give feedback

Share

Export

Status category

Epic 4

Clear filters

	OCT	NOV	DEC	
Sprints		SGFCM- SGFCM- SGFCM- SGFCM Sprint 4		
SGFCM-5 sprint 1				
SGFCM-6 sprint 2				
SGFCM-7 sprint 3				
SGFCM-8 sprint 4				
+ Create Epic				

Today

Weeks

Months

Quarters

Quickstart

## 7. CODING AND SOLUTIONING:

(Explain the features added in the project along with web)

Feature Code:

```
import time

import sys

import ibmiotf.application

import ibmiotf.device

import random

#Provide your IBM Watson Device Credentials

organization = "933n2d"

deviceType = "koushik47"

deviceId = "07" authMethod

= "token" authToken =

"87654321"

#apikey {a-illza1-mbdxqo6z0s}

#api token {zSYzISuAWF&F_x7GkT}

try:

    deviceOptions = {"org": organization, "type": deviceType, "id": deviceId, "auth-method":

authMethod, "auth-token": authToken}

    deviceCli = ibmiotf.device.Client(deviceOptions

#.....
```

except Exception as e:

```
print("Caught exception connecting device: %s" % str(e))
```

```
sys.exit()
```

```
# Connect and send a datapoint "hello" with value "world" into the cloud as an event of type "greeting" 10 times
```

```
print("power on ")
```

```
print("checking connection to wastoniot...")
```

```
time.sleep(2)
```

```
deviceCli.connect()
```

```
print("dear user ... welcome to IBM-IOT ")
```

```
print("i can provide your children live location and temperature ")
```

```
print()
```

```
name=str(input("enter your child name:"))while
```

```
True:
```

```
temperature=random.randint(20,85)#random temperature for your child
```

```
latitude=random.uniform(12.1295314,12.1335137)#random latitude for your child
```

```
longitude=random.uniform(78.1955059,78.1986357)#random longitude for your child
```

```
a="Child inside the geofence"
```

```
b=" Child outside the geofence"
```

```
c="High temperature"
```

```
d="Low temperature"
```

```
x={'your_child_zone':a}
```

```
y={'your_child_zone':b}
```

```
z={'temp_condition':c}
```

```
w={'temp_condition':d}
```

```
data = { 'temp' : temperature, 'lat': latitude,'lon':longitude,'name':name }#print data
```

```
defmyOnPublishCallback():
```

```
print ("Published Temperature = %s C" % temperature, "latitude = %s %" % latitude, "longitude = %s  
%" % longitude, "to IBM Watson")
```

```
print("\n")
```

```
success = deviceCli.publishEvent("IoTSensorgpsdata", "json", data,qos=0,on_publish=myOnPublishCallback)
```

```
if latitude>=12.1303598 and latitude<=12.1321095 and longitude >=78.1967589 and longitude  
<=78.19820833:
```

```
deviceCli.publishEvent("IoTSensorgpsdata","json",data=x,qos=0,on_publish=myOnPublishCallback) print(x)
```

```
print("\n")
```

```
else:
```

```
deviceCli.publishEvent("IoTSensorgpsdata","json",data=y,qos=0,on_publish=myOnPublishCallback) print(y)
```

```
print("\n")
```

```
if (temperature >= 40):  
    deviceCli.publishEvent("IoTSensorgpsdata", "json", data=z, qos=0, on_publish=myOnPublishCallback) print(z)  
    print("\n")  
else:  
    deviceCli.publishEvent("IoTSensorgpsdata", "json", data=w, qos=0, on_publish=myOnPublishCallback) print(w)  
    print("\n")  
if not success:  
    print("Not connected to IoTF")  
    print("\n")  
    time.sleep(1)  
# Disconnect the device and application from the cloud  
deviceCli.disconnect()
```



## 8. TESTING:

### Test case:

SL.NO	INPUT	OUTPUT	RESULT
01.	Latitude, Longitude Temperature	Inside the geofence, Temperature low	Passed
02.	Latitude, Longitude Temperature	Inside the geofence, Temperature high	Passed
03.	Latitude, Longitude Temperature	Outside the geofence, Temperature low	Passed
04.	Latitude, Longitude Temperature	Outside the geofence, Temperature low	Passed
05.	Latitude, Longitude Temperature	Inside the geofence, Temperature low	Passed
06.	Latitude, Longitude Temperature	Inside the geofence, Temperature high	Passed
07.	Latitude, Longitude Temperature	Outside the geofence,	Passed

		Temperature low	
<b>08.</b>	Latitude, Longitude Temperature	Inside the geofence, Temperature low	Passed
<b>09.</b>	Latitude, Longitude Temperature	Inside the geofence, Temperature high	Passed
<b>10.</b>	Latitude, Longitude Temperature	Inside the geofence, Temperature low	Passed
<b>11.</b>	Latitude, Longitude Temperature	Inside the geofence, Temperature low	Passed
<b>12.</b>	Latitude, Longitude Temperature	Outside the geofence, Temperature low	Passed
<b>13.</b>	Latitude, Longitude Temperature	Inside the geofence, Temperature low	Passed
<b>14.</b>	Latitude, Longitude Temperature	Inside the geofence, Temperature high	Passed
<b>15.</b>	Latitude, Longitude Temperature	Outside the geofence, Temperature high	Passed
<b>16.</b>	Latitude, Longitude Temperature	Outside the geofence, Temperature low	Passed
<b>17.</b>	Latitude, Longitude Temperature	Inside the geofence, Temperature low	Passed

<b>18.</b>	Latitude, Longitude Temperature	Inside the geofence, Temperature high	Passed
<b>19.</b>	Latitude, Longitude Temperature	Outside the geofence, Temperature low	Passed
<b>20.</b>	Latitude, Longitude Temperature	Outside the geofence, Temperature high	Passed
<b>21.</b>	Latitude, Longitude Temperature	Inside the geofence, Temperature low	Passed
<b>22.</b>	Latitude, Longitude Temperature	Inside the geofence, Temperature high	Passed
<b>23.</b>	Latitude, Longitude Temperature	Outside the geofence, Temperature low	Passed
<b>24.</b>	Latitude, Longitude Temperature	Inside the geofence, Temperature low	Passed
<b>25.</b>	Latitude, Longitude Temperature	Outside the geofence, Temperature low	Passed

Device ID	Status	Device Type	Class ID	Date Added	
13	Connected	ABCD	Device	Nov 2, 2022 10:55 PM	→ ...

Identity	Device Information	Recent Events	State	Logs	
----------	--------------------	---------------	-------	------	--


The recent events listed show the live stream of data that is coming and going from this device.

Event	Value	Format	Last Received
IoTSensorgp...	{"temp_condition": "Low temperature"}	json	a few seconds ago
IoTSensorgp...	{"your_child_zone": "Child outside the geofence"}	json	a few seconds ago
IoTSensorgp...	{"temp": 21, "lat": 12.13102244642139, "lon": 78.19716317123091}	json	a few seconds ago
IoTSensorgp...	{"temp_condition": "High temperature"}	json	a few seconds ago
IoTSensorgp...	{"your_child_zone": "Child outside the geofence"}	1 Simulation running	

```

d="Do
x=('y
y=('y
z=('t
w=('t
Type "help", "copyright", "credits" or "license()" for more information.
>>>
RESTART: C:\Users\kutta\Desktop\IBM -PROJECT-chinna\ibmonlinenodered - Copy.py
power on
#prin
checking connection to watson iot...
def m
2022-11-16 21:15:07.425  ibmiotf.device.Client      INFO      Connected successfu
lly: d:zwk61b:ABCD:13
p
dear user ... welcome to IBM-IOT
succe
i can provide your childrens live location and temperature
if la
d
enter your child name:child1
p
Published Temperature = 41 C latitude = 12.131046423470156 & longitude = 78.1971
6317123091 & to IBM Watson
else:
d
p
({'your_child_zone': 'Child inside the geofence'})Published Temperature = 41 C
p
latitude = 12.131046423470156 &
longitude = 78.19716317123091 & to IBM Watson
if (t
p
({'temp_condition': 'High temperature'})Published Temperature = 41 C
else:
latitude = 12.131046423470156 &
longitude = 78.19716317123091 & to IBM Watson
|
if no
p
p
time.
# Disconnect
deviceCli.dis
longitude = %s %s" % longitude, "to IBM Watson")
PublishCallback)
<=78.19820833:
allback)
allback)
ishCallback)
ishCallback)

```

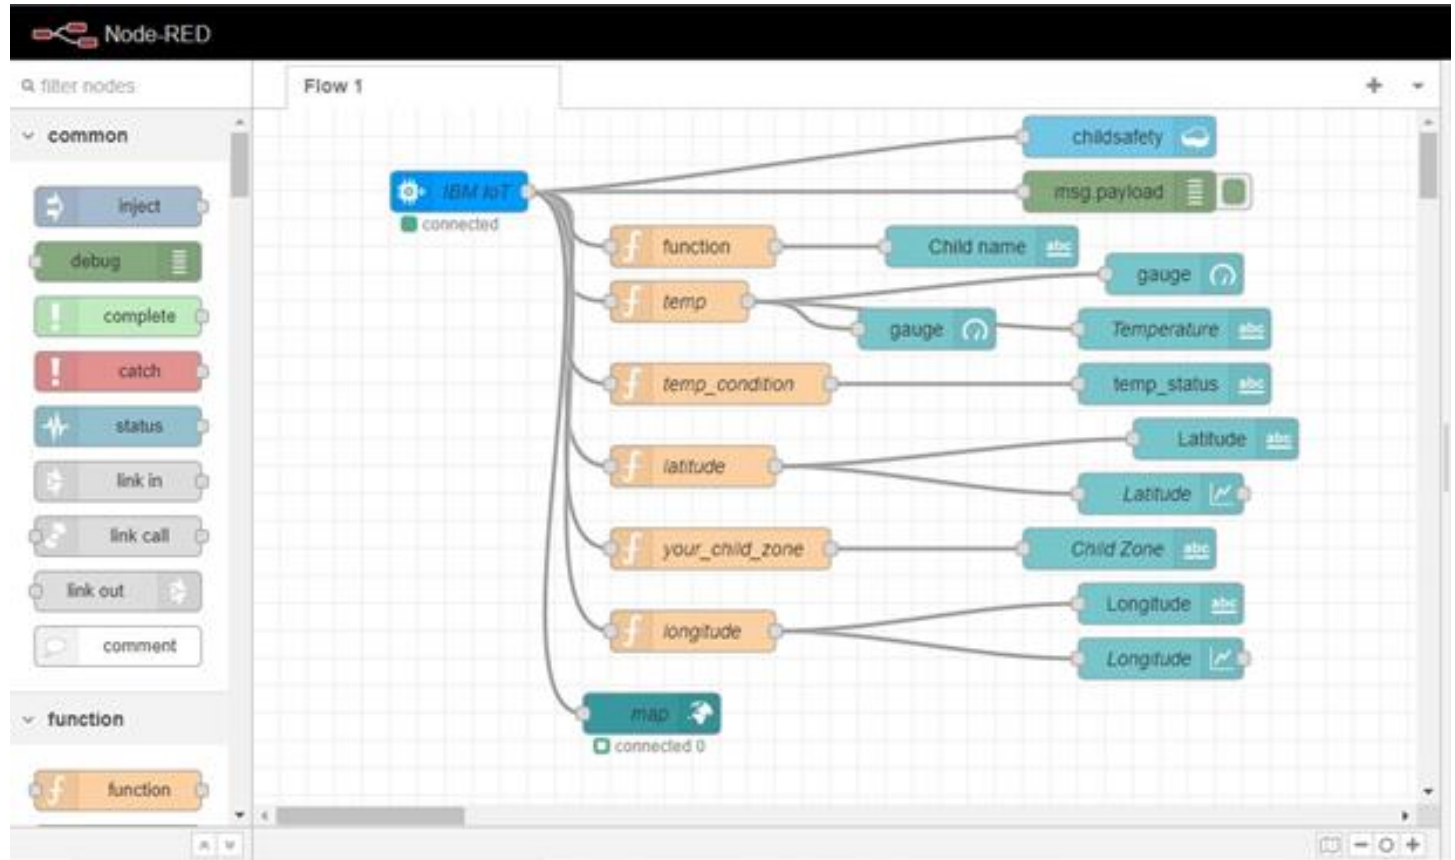

## User Acceptance Testing:

### Purpose of Document:

The purpose of this document is to briefly explain the test coverage and open issues of the IOT Based Safety Gadget For Child Safety Monitoring and Notification project at the time of the release to User Acceptance Testing (UAT).

# Defect Analysis:



This report shows the number of resolved or closed bugs at each severity level, and howthey were resolved

Resolution	Severity 1	Severity 2	Severity 3	Severity 4	Subtotal
By Design	5	3	2	3	13
Duplicate	1	0	0	0	1
External	2	2	0	1	5
Fixed	6	5	3	10	24
Not Reproduced	0	0	1	0	1
Skipped	0	0	1	1	2
Won't Fix	0	0	2	1	3
Totals	14	10	9	16	49

## Test Case Analysis

This report shows the number of test cases that have passed, failed, and untested

Section	Total Cases	Not Tested	Fail	Pass
Print Engine	7	0	0	7
Client Application	30	0	0	30
Security	2	0	0	2
Outsource Shipping	3	0	0	3
Exception Reporting	9	0	0	9
Final Report Output	4	0	0	4
Version Control	2	0	0	2

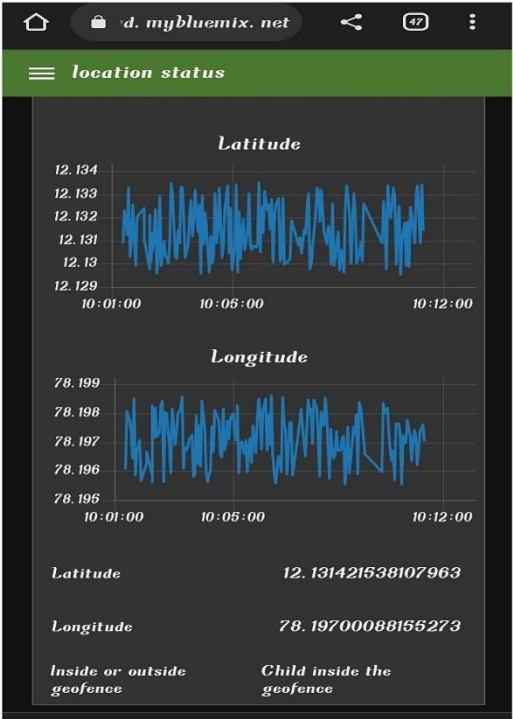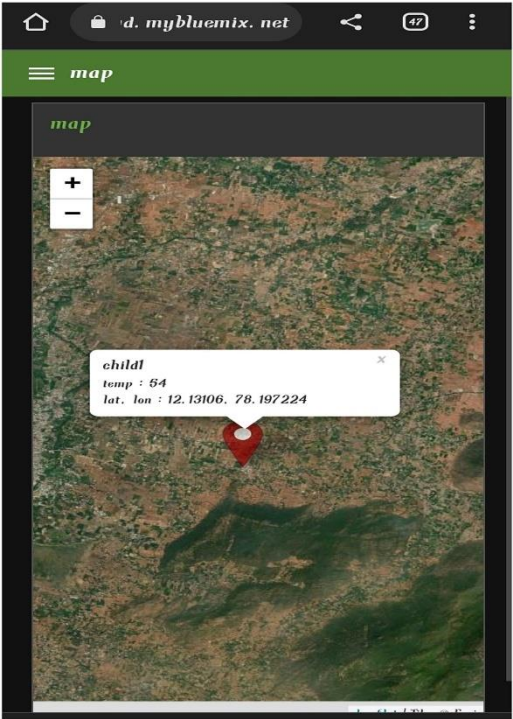



9. RESULTS:

Performance metrics

NFT - Risk Assessment									
S.No	Project Name	Scope/Feature	Functional Changes	Hardware Changes	Software Changes	Impact of Defect	Last/Status Changes	Risk Score	Justification
1	Mobile App for Child Safety Monitoring and Notification	Existing	Minor	Low	Minor	High initial cost	1-4 to 10%	High	This system of child safety monitoring and notification is already existing
	Efficient in creation of geofence					NP 3			This is not first time location update
									The risk rate is moderate

NFT - Detailed Test Plan				
S.No	Project Overview	NFT Test approach	Assumptions/Dependencies/Risks	Approvals/SignOff
1	Mobile App for Child Safety Monitoring and Notification	Break a get if the child crosses the geofence	Assumptions	

End Of Test Report						
S.No	Project Overview	NFT Test approach	NFR - Met	Test Outcome	GO/NO-GO decision	Identified Defects (Defected/Closed/Open)
	Mobile App for Child Safety Monitoring and Notification	Issues occurred while turning while connecting with the device while creating geofence		get location of the child get some error while connecting with the device difficult in creation of geofence	to determine the frequency update locations	deleted and closed

## **10. ADVANTAGES AND DISADVANTAGES**

### **Advantages:**

1. Save the life of the children.
2. Parent's do their work peacefully without worrying about their children.
3. Continuously monitoring the children.
4. Saves time.
5. Recovery of the children is easy, if the children lost.

### **Disadvantages:**

1. Young Children may refuse to cooperate unless allowed to play with their gadgets.
2. Easily misusing the device.
3. No water proof.

## **11. CONCLUSION:**

The child tracking system that helps parents track the movements of children with the help of GPS technology. The entire location data is stored in database. This proposed app can show whether the children are inside the geofence or outside the geofence to the parent's mobile. Even if the software is not running, the details are shown. It is because location access is available in the background and the software performs well on the mobile device. Based on the availability of the parent user, additional geofences may be required. Performance Requirements are summarized as follows: login, Location status, temperature, Live on map etc. The system shall allow the user to create and/or log in to an account. The system shall allow the user to find the exact location of the children using GPS. The system shall allow the user to track the current location of the children using GPS.

## **12. FUTURE SCOPE:**

1. Childs surrounding can be located with the help of accurate and precise real time location.
2. Surrounding environment temperature, SOS light along with Distress buzzers are provided inthis system.
3. If child crosses the geofence, call goes to the registered mobile number's.
4. This gadgets will be modified that has been suitable for all environments.

## 13. APPENDIX:

Python code:

```
import time

import sys

import ibmiotf.application

import ibmiotf.device

import random

#Provide your IBM Watson Device Credentials

organization = "933n2d"

deviceType = "koushik47"

deviceId = "07" authMethod

= "token" authToken =

"87654321"

#apikey {a-illza1-mbdxqo6z0s}

#api token {zSYzISuAWF&F_x7GkT}

try:

    deviceOptions = {"org": organization, "type": deviceType, "id": deviceId, "auth-method":authMethod,

"auth-token": authToken}

    deviceCli = ibmiotf.device.Client(deviceOptions)

    #.....
```

```
except Exception as e:
```

```
    print("Caught exception connecting device: %s" % str(e))
```

```
    sys.exit()
```

```
# Connect and send a datapoint "hello" with value "world" into the cloud as an event of type "greeting" 10 times
```

```
print("power on ")
```

```
print("checking connection to wastoniot...")
```

```
time.sleep(2)
```

```
deviceCli.connect()
```

```
print("dear user ... welcome to IBM-IOT ")
```

```
print("i can provide your children live location and temperature ")
```

```
print()
```

```
name=str(input("enter your child name:"))while
```

```
True:
```

```
temperature=random.randint(20,85)#random temperature for your child
```

```
latitude=random.uniform(12.1295314,12.1335137)#random latitude for your child
```

```
longitude=random.uniform(78.1955059,78.1986357)#random longitude for your child
```

```
    a="Child inside the geofence" b="
```

```
    Child outside the geofence"
```

```
    c="High temperature"
```

```
    d="Low temperature"
```

```

x={'your_child_zone':a}

y={'your_child_zone':b}

z={'temp_condition':c}

w={'temp_condition':d}

data = { 'temp' : temperature, 'lat': latitude,'lon':longitude,'name':name } #print

data

defmyOnPublishCallback():

print ("Published Temperature = %s C" % temperature, "latitude = %s %" % latitude, "longitude = %s
%" % longitude, "to IBM Watson")

print("\n")

success = deviceCli.publishEvent("IoTSensorgpsdata", "json", data, qos=0,on_publish=myOnPublishCallback)

if latitude>=12.1303598 and latitude<=12.1321095 and longitude >=78.1967589 and longitude
<=78.19820833:

deviceCli.publishEvent("IoTSensorgpsdata","json",data=x,qos=0,on_publish=myOnPublishCallback) print(x)

print("\n")

else:

deviceCli.publishEvent("IoTSensorgpsdata","json",data=y,qos=0,on_publish=myOnPublishCallback) print(y)

print("\n")

if (temperature>=40):

```

```
deviceCli.publishEvent("IoTSensorgpsdata","json",data=z,qos=0,on_publish= myOnPublishCallback)
```

```
print(z)
```

```
print("\n")
```

```
else:
```

```
deviceCli.publishEvent("IoTSensorgpsdata","json",data=w,qos=0,on_publish=myOnPublishCallback) print(w)
```

```
print("\n")
```

```
if not success:
```

```
print("Not connected to IoTTF")
```

```
print("\n")
```

```
time.sleep(1)
```

```
# Disconnect the device and application from the cloud
```

```
deviceCli.disconnect()
```



## **GitHub & Project demo link:**

GitHub Link: <https://github.com/IBM-EPBL/IBM-Project-14261-1659547652>

MIT App APK File Link:

[https://drive.google.com/file/d/1wl6CvdzqxU1\\_ljjNMtDOxadzL1ERuLX/view?usp=sharing](https://drive.google.com/file/d/1wl6CvdzqxU1_ljjNMtDOxadzL1ERuLX/view?usp=sharing)

Project Demonstration Video Link:

[https://drive.google.com/file/d/1SK2nOhzfaPgK4-jvZe4QCmmlAWn5jOH\\_/view?usp=sharing](https://drive.google.com/file/d/1SK2nOhzfaPgK4-jvZe4QCmmlAWn5jOH_/view?usp=sharing)