

SPRINT 4

TOPIC : SIGNS WITH SMART CONNECTIVITY FOR BETTER ROAD SAFETY.

TEAM ID : PNT2022 TMID06138

DATE : 19 NOV 2022

SOFTWARE USED:

- Wokwi Online Simulator
- IBM Watson IOT
- Node-Red

US 1: Creating a simulation of a digital board using Wokwi Online Simulator and controlling the Diversions using Node-Red

CODE:

```
#include <WiFi.h>
#include <HTTPClient.h>
#include <Adafruit_GFX.h>
#include <Adafruit_ILI9341.h>
#include <string.h>

const char* ssid = "Wokwi-GUEST";
const char* password = "";

#define TFT_DC 2
#define TFT_CS 15
Adafruit_ILI9341 tft = Adafruit_ILI9341(TFT_CS, TFT_DC);

int uid = 2504;

String getString(char x)
{
    String s(1, x);
    return s;
}

String stringSplitter1(String fullString,char delimiter='$')
{

```

```

String returnString = "";
for(int i = 0; i<fullString.length();i++) {
    char c = fullString[i];
    if(delimiter==c)
        break;
    returnString+=String(c);
}
return(returnString);
}

String stringSplitter2(String fullString,char delimiter='$')
{
    String returnString = "";
    bool flag = false;
    for(int i = 0; i<fullString.length();i++) {
        char c = fullString[i];
        if(flag)
            returnString+=String(c);
        if(delimiter==c)
            flag = true;
    }
    return(returnString);
}

void rightArrow()
{
    int refX = 50;
    int refY = tft.getCursorY() + 40;

    tft.fillRect(refX,refY,100,20,ILI9341_RED);
    tft.fillTriangle(refX+100,refY-
30,refX+100,refY+50,refX+40+100,refY+10,ILI9341_RED);
}

void leftArrow()
{
    int refX = 50;
    int refY = tft.getCursorY() + 40;

    tft.fillRect(refX+40,refY,100,20,ILI9341_RED);
    tft.fillTriangle(refX+40,refY-30,refX+40,refY+50,refX,refY+10,ILI9341_RED);
}

void upArrow()
{
    int refX = 125;
    int refY = tft.getCursorY() + 30;

```

```

    tft.fillTriangle(refX-40,refY+40,refX+40,refY+40,refX,refY,ILI9341_RED);
    tft.fillRect(refX-15,refY+40,30,20,ILI9341_RED);
}

void uTurn(){
    tft.setTextSize(7);
    tft.setTextColor(ILI9341_RED);
    tft.setRotation(1);
    tft.print("U-Turn");
}

String APICall() {
    HTTPClient http;

    String url = "https://signs-with-smart-connectivity.eu-
gb.mybluemix.net/getDirection?";
    url += "uid="+(String)uid;

    http.begin(url.c_str());
    int httpResponseCode = http.GET();

    if (httpResponseCode>0) {
        String payload = http.getString();
        http.end();
        return(payload);
    }
    else {
        Serial.print("Error code: ");
        Serial.println(httpResponseCode);
    }
    http.end();
}

void myPrint(String contents) {
    tft.fillScreen(ILI9341_BLACK);
    tft.setCursor(0, 20);
    tft.setTextSize(4);
    tft.setTextColor(ILI9341_RED);

    tft.println(stringSplitter1(contents));
    String c2 = stringSplitter2(contents);
    if(c2=="s") // represents Straight
    {
        upArrow();
    }
    if(c2=="l") // represents left
    {
        leftArrow();
    }
    if(c2=="r") // represents right

```

```
{
    rightArrow();
}
if(c2=="u") // represents U TURN
{
    uTurn();
}
}

void setup() {
    WiFi.begin(ssid, password, 6);

    tft.begin();
    tft.setRotation(1);

    tft.setTextColor(ILI9341_WHITE);
    tft.setTextSize(2);
    tft.print("Connecting to WiFi");


    while (WiFi.status() != WL_CONNECTED) {
        delay(100);
        tft.print(".");
    }

    tft.print("\nOK! IP=");
    tft.println(WiFi.localIP());
}


void loop() {


    myPrint(APICall());
}
```

OUTPUT:

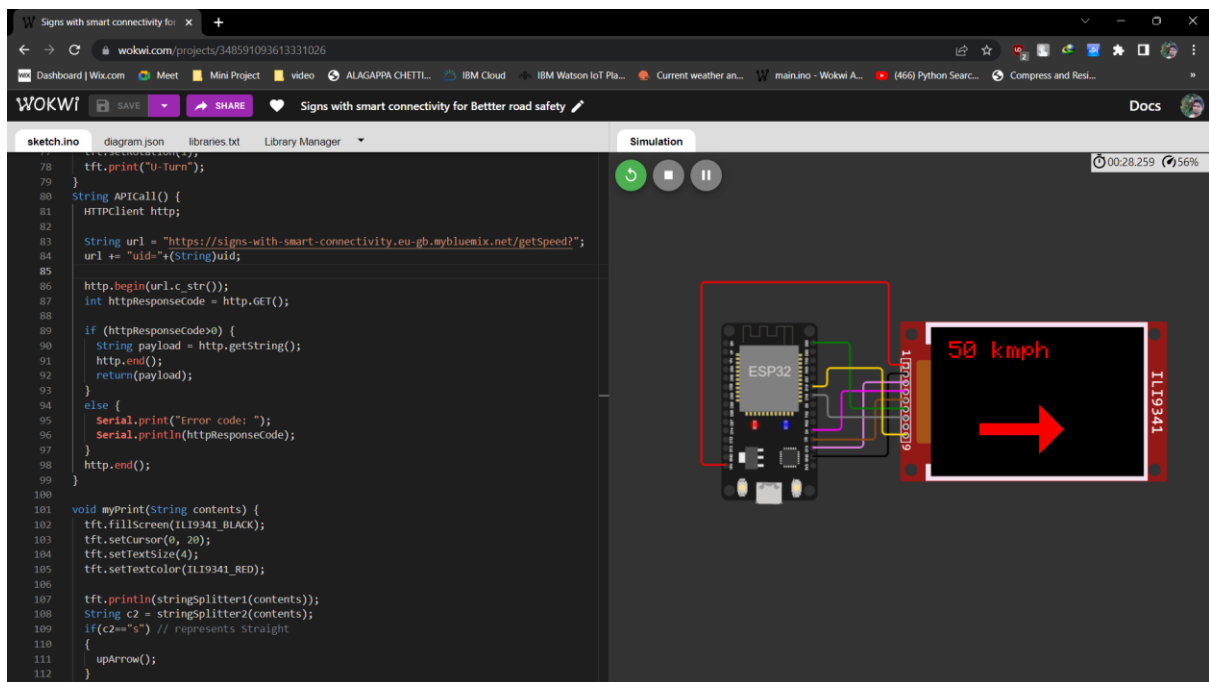

US 2: Controls in Node-Red for Diversions

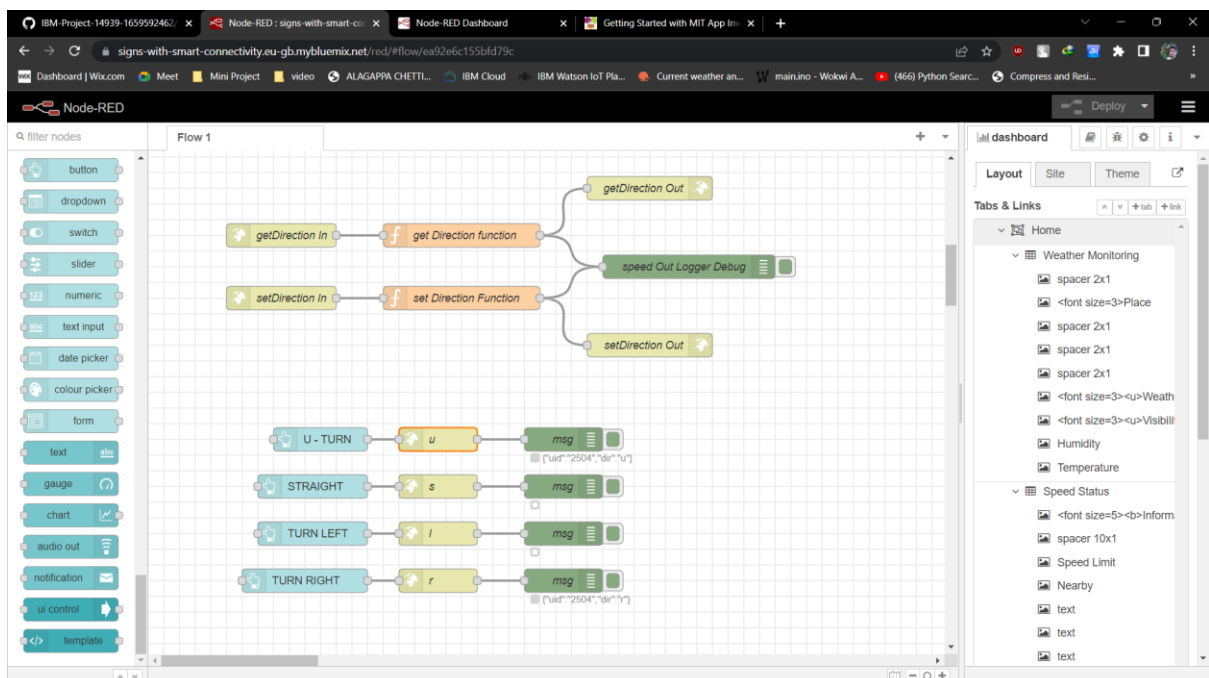

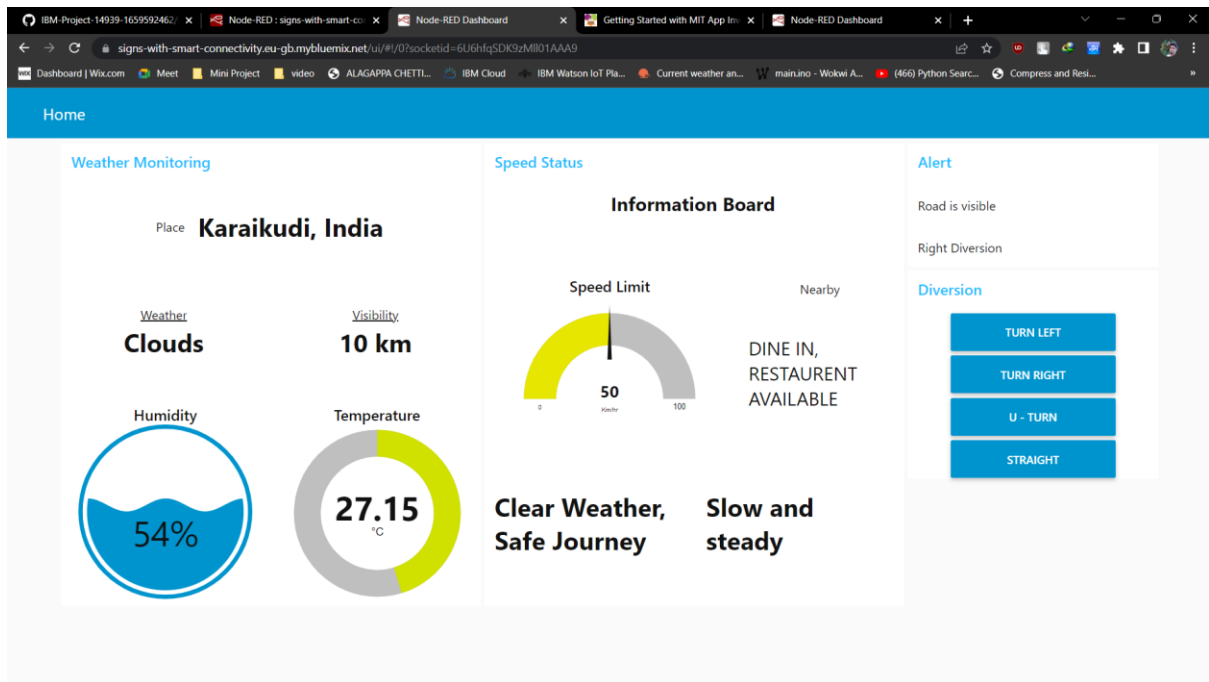

NODE-RED LINK:

<https://signs-with-smart-connectivity.eu-gb.mybluemix.net/ui>

SIMULATION LINK:

<https://wokwi.com/projects/348591093613331026>