


Sprint - 3

Team ID: PNT2022TMID00236

PROJECT TITLE: *SmartFarmer – IoT based smart farming application*

Configuration of Node-Red to send commands to IBM cloud

ibmiot out node I used to send data from Node-Red to IBM Watson device. So, after adding it to the flow we need to configure it with credentials of our Watson device.

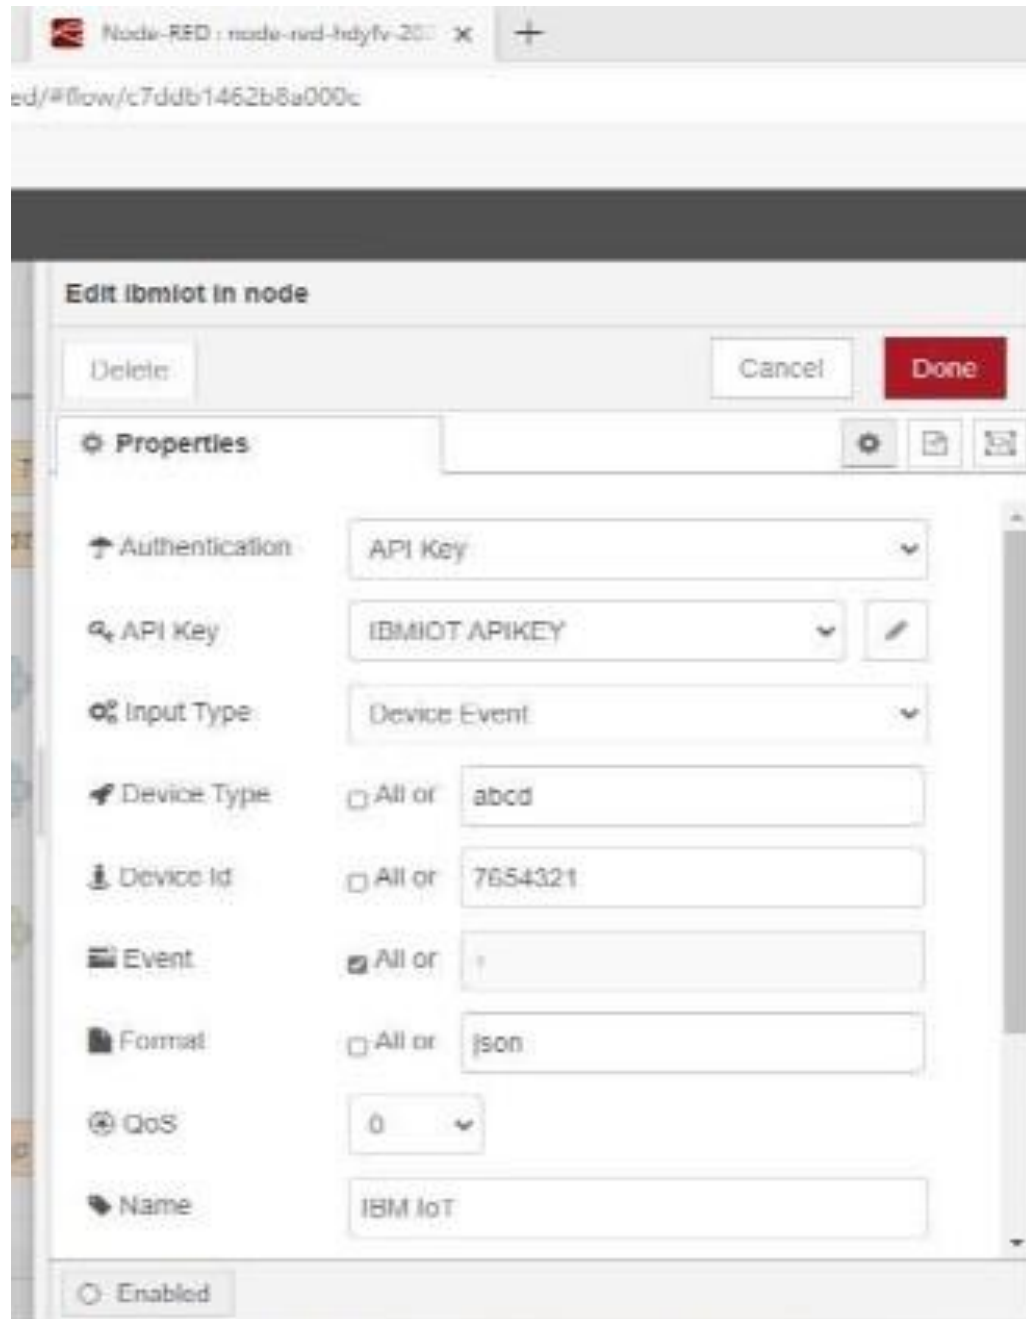

The screenshot shows the 'Edit ibmiot in node' configuration window in Node-RED. The window has a title bar with 'Node-RED : node-red-ndyfv-20...' and a close button. Below the title bar is a URL bar showing 'ed/#flow/c7ddb1462b8a000c'. The main content area is titled 'Edit ibmiot in node' and contains several configuration options:

- Authentication:** A dropdown menu set to 'API Key'.
- API Key:** A text input field containing 'IBMIOT APIKEY' and a search icon.
- Input Type:** A dropdown menu set to 'Device Event'.
- Device Type:** A checkbox labeled 'All or' followed by a text input field containing 'abcd'.
- Device Id:** A checkbox labeled 'All or' followed by a text input field containing '7654321'.
- Event:** A checkbox labeled 'All or' followed by a text input field containing ' '.
- Format:** A checkbox labeled 'All or' followed by a text input field containing 'json'.
- QoS:** A dropdown menu set to '0'.
- Name:** A text input field containing 'IBM IoT'.

At the bottom of the window, there is a checkbox labeled 'Enabled' which is currently checked.

Here we add two buttons in UI

1 -> for motor on

2 -> for motor off

We used a function node to analyse the data received and assign command to each number.

The Java script code for the analysis is:

```
if(msg.payload===1)
msg.payload={"command": "ON"};
else if(msg.payload===0)
msg.payload={"command": "OFF"};
```

Then we use another function node to parse the data and get the command and represent it visually with text node.


The Java script code for that function node is:

```
var state=msg.payload;
msg.payload = state.command;
return msg;
```




The above images show the java script codes of analyser and state function nodes.

Then we add edit json node to the conversion between JSON string & object and finally connect it to IBM IoT Out.

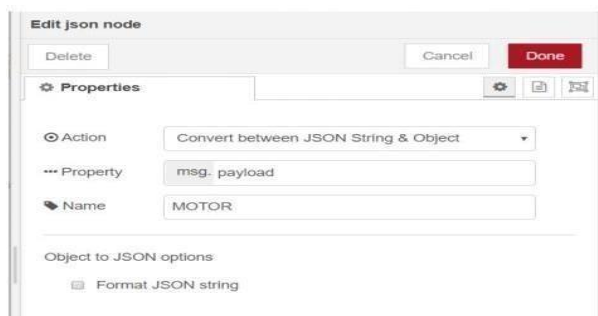

Edit JSON node needs to be configured like this

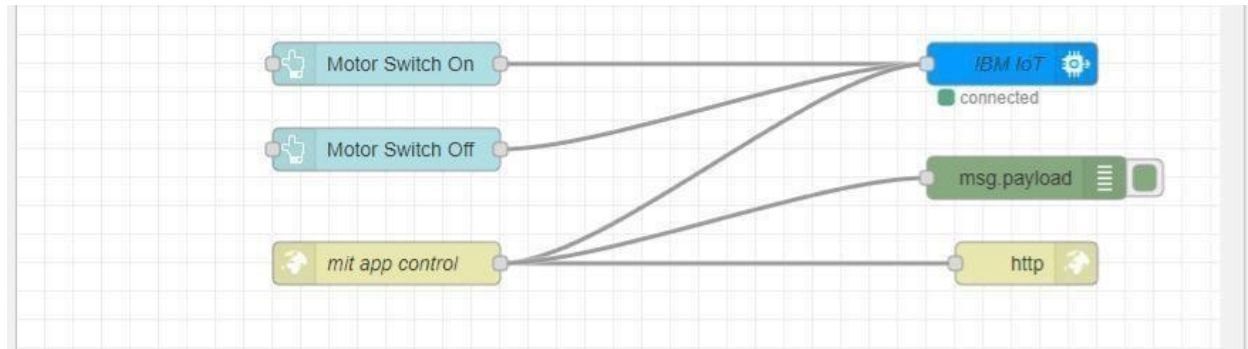

This is the program flow for sending commands to IBM cloud.


5.4 Adjusting User Interface

In order to display the parsed JSON data a Node-Red dashboard is created

Here we are using Gauges, text and button nodes to display in the UI and helps to monitor the parameters and control the farm equipment.

Below images are the Gauge, text and button node configurations.

MOBILE APP WEB :

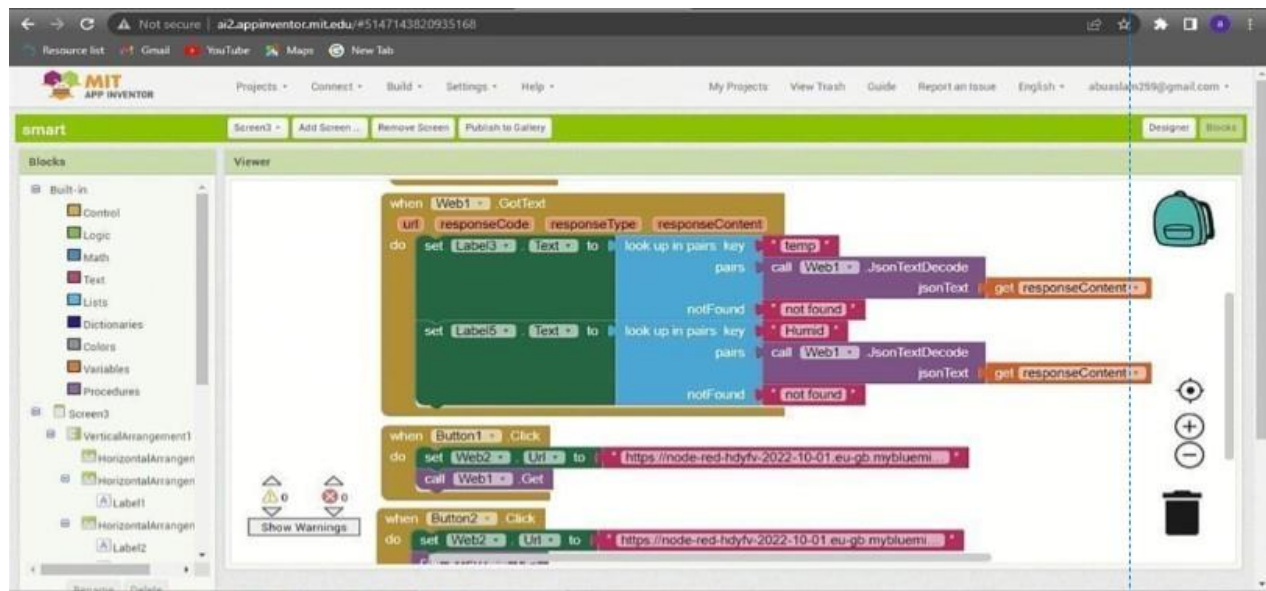



SCREEN – 1

The image shows a solid green rectangular screen. At the top, the word "SmartFarmer" is written in a bold, black sans-serif font. Below this, the word "Username" is written in a smaller black font, followed by a white rectangular input field containing the text "Farmer1". Below that, the word "Password" is written in a smaller black font, followed by a white rectangular input field containing seven black dots. At the bottom center, there is a blue rectangular button with the word "Submit" written in white.

SCREEN - 2

SmartFarmer

Soil Moisture level (%) : 54%

Temperature (°C) : 27°C

Humidity (%) : 88%

Motor ON

Motor OFF

SCREEN – 3

Web APP UI Home Tab

