
## **ASSIGNMENT 1**

## BHAVASRI.V MEPCO SCHLENK ENGINEERING COLLEGE.

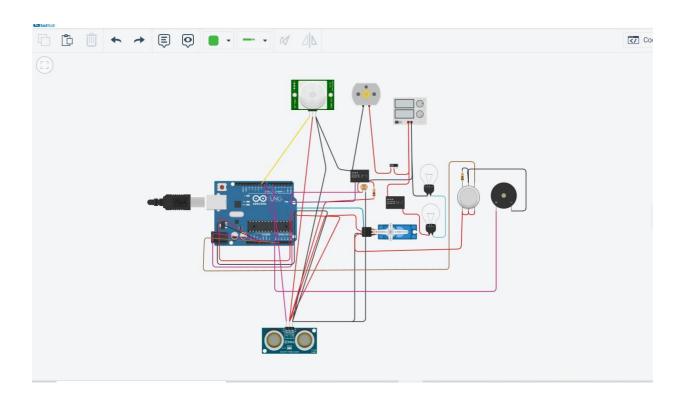

```
#include <Servo.h>
int output 1 Value = 0;
int sen1Value = 0;
int sen2Value = 0;
int const gas_sensor = A1;
int const LDR = A0;
int limit = 400;
long readUltrasonicDistance(int triggerPin, int echoPin)
{
 pin Mode (trigger Pin,\,OUTPUT);
 digitalWrite(triggerPin, LOW);
 delayMicroseconds(2);
 digitalWrite(triggerPin, HIGH);
 delayMicroseconds(10);
 digitalWrite(triggerPin, LOW);
 pinMode(echoPin, INPUT);
```

```
return pulseIn(echoPin, HIGH);
Servo servo_7;
void setup()
 Serial.begin(9600);
 pinMode(A0, INPUT);
 pinMode(A1,INPUT);
 pinMode(13, OUTPUT);
 servo_7.attach(7, 500, 2500);
 pinMode(8,OUTPUT);
 pinMode(9, INPUT);
 pinMode(10, OUTPUT);
 pinMode(4, OUTPUT);
 pinMode(3, OUTPUT);
}
void loop()
  int val1 = analogRead(LDR);
 if (val1 > 500)
        digitalWrite(13, LOW);
  Serial.print("Bulb ON = ");
  Serial.print(val1);
 else
        digitalWrite(13, HIGH);
```

```
Serial.print("Bulb OFF = ");
  Serial.print(val1);
 sen2Value = digitalRead(9);
 if (sen 2 Value == 0)
        digitalWrite(10, LOW);
        digitalWrite(4, HIGH);
        digitalWrite(3, LOW);
  Serial.print(" || NO Motion Detected ");
        }
 if (sen2Value == 1)
        digitalWrite(10, HIGH);
  delay(3000);
        digitalWrite(4, LOW);
        digitalWrite(3, HIGH);
  Serial.print("
                   || Motion Detected!
 delay(300);
int val = analogRead(gas_sensor);
 Serial.print("|| Gas Sensor Value = ");
 Serial.print(val);
//val = map(val, 300, 750, 0, 100);
 if (val > limit)
        {
        tone(8, 650);
        delay(300);
        noTone(8);
```