SPRINT 2

Date	16 November 2022
Team ID	PNT2022TMID16188
Project Name	Project – Signs with Smart Connectivity for Better Road Safety

SPRINT TARGET:

SPRINT	FUNCTIONAL REQUIREMENT (EPIC)	USER STORY/TASK	STORY POINTS	PRIORITY	TEAM MEMBERS
Sprint-2	UI/UX optimization & debugging	Optimize all the shortcomings and provide better user experience	1	Medium	SOWMYA B, SHAMYUKDHA PV, VIJAYALAKSHMI C V, VAISHNAVI N

STEP 1:
WOKWI SIMULATION
The code is simulated in WOKWI platform.
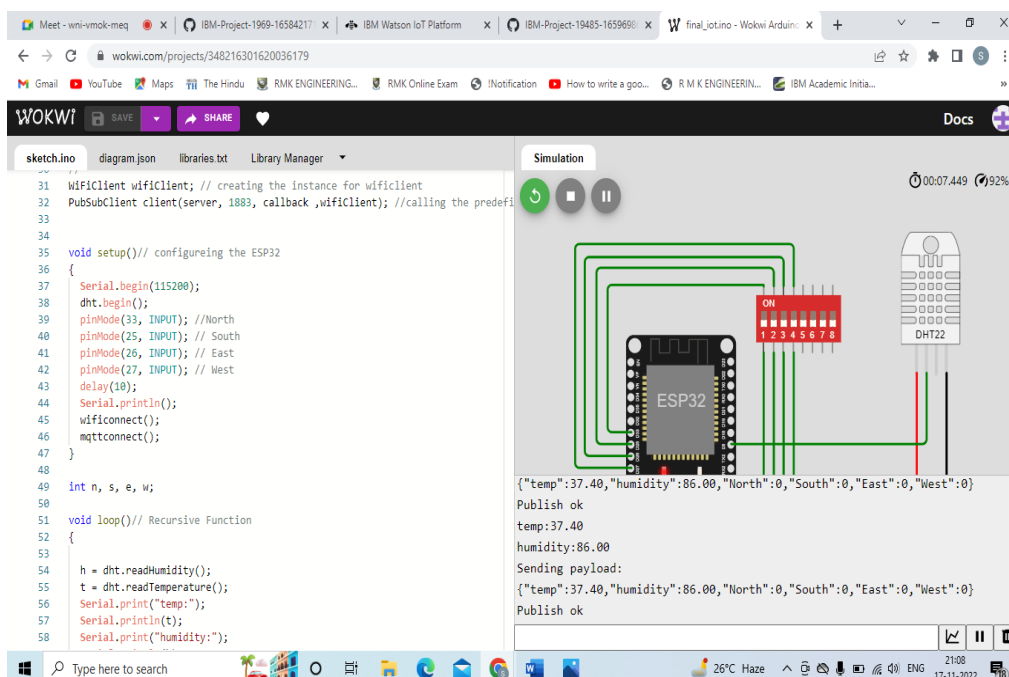
WOKWI CODE:

```cpp
#include <WiFi.h>//library for wifi
#include <PubSubClient.h>//library for MQtt
#include "DHT.h"// Library for dht11
#define DHTPIN 5     // what pin we're connected to
#define DHTTYPE DHT22   // define type of sensor DHT 11

DHT dht (DHTPIN, DHTTYPE);// creating the instance by passing pin and typr of
dht connected

void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength);

//-------credentials of IBM Accounts------

#define ORG "d5zx56"//IBM ORGANITION ID
#define DEVICE_TYPE "SMARTBOARD"//Device type mentioned in ibm watson IOT
Platform
#define DEVICE_ID "SMARTCONNECTIVITY"//Device ID mentioned in ibm watson IOT
Platform
#define TOKEN "957846465"      //Token
String data3;
float h, t;


//-------- Customise the above values --------
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";// Server Name
char publishTopic[] = "iot-2/evt/Data/fmt/json";// topic name and type of
event perform and format in which data to be send
char subscribetopic[] = "iot-2/cmd/command/fmt/String";// cmd  REPRESENT
command type AND COMMAND IS TEST OF FORMAT STRING
char authMethod[] = "use-token-auth";// authentication method
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;//client id


//-----------------------------------------
WiFiClient wifiClient; // creating the instance for wificlient
PubSubClient client(server, 1883, callback ,wifiClient); //calling the
predefined client id by passing parameter like server id,portand
wificredential


void setup()// configureing the ESP32
{
```

```cpp
  Serial.begin(115200);
  dht.begin();
  pinMode(33, INPUT); //North
  pinMode(25, INPUT); // South
  pinMode(26, INPUT); // East
  pinMode(27, INPUT); // West
  delay(10);
  Serial.println();
  wificonnect();
  mqttconnect();
}

int n, s, e, w;

void loop()// Recursive Function
{

  h = dht.readHumidity();
  t = dht.readTemperature();
  Serial.print("temp:");
  Serial.println(t);
  Serial.print("humidity:");
  Serial.println(h);

  n = digitalRead(33);
  s = digitalRead(25);
  e = digitalRead(26);
  w = digitalRead(27);

  PublishData(t, h, n, s, e, w);
  delay(1000);
  if (!client.loop()) {
    mqttconnect();
  }
}




/*.....................................retrieving to
Cloud..............................*/

void PublishData(float temp, float humid, int n, int s, int e, int w) {
  mqttconnect();//function call for connecting to ibm
  /*
     creating the String in in form JSon to update the data to ibm cloud
  */
  String payload = "{\"temp\":";
  payload += temp;
  payload += "," "\"humidity\":";
```

```cpp
    payload += humid;
    payload += "," "\"North\":";
    payload += n;
    payload += "," "\"South\":";
    payload += s;
    payload += "," "\"East\":";
    payload += e;
    payload += "," "\"West\":";
    payload += w;
    payload += "}";


    Serial.print("Sending payload: ");
    Serial.println(payload);


    if (client.publish(publishTopic, (char*) payload.c_str())) {
        Serial.println("Publish ok");// if it sucessfully upload data on the cloud
then it will print publish ok in Serial monitor or else it will print publish
failed
    } else {
        Serial.println("Publish failed");
    }

}


void mqttconnect() {
    if (!client.connected()) {
        Serial.print("Reconnecting client to ");
        Serial.println(server);
        while (!!!client.connect(clientId, authMethod, token)) {
            Serial.print(".");
            delay(500);
        }

        initManagedDevice();
        Serial.println();
    }
}
void wificonnect() //function defination for wificonnect
{
    Serial.println();
    Serial.print("Connecting to ");

    WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to establish
the connection
    while (WiFi.status() != WL_CONNECTED) {
        delay(500);
```

```cpp
      Serial.print(".");
  }
  Serial.println("");
  Serial.println("WiFi connected");
  Serial.println("IP address: ");
  Serial.println(WiFi.localIP());
}

void initManagedDevice() {
  if (client.subscribe(subscribetopic)) {
    Serial.println((subscribetopic));
    Serial.println("subscribe to cmd OK");
  } else {
    Serial.println("subscribe to cmd FAILED");
  }
}

void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{

  Serial.print("callback invoked for topic: ");
  Serial.println(subscribetopic);
  for (int i = 0; i < payloadLength; i++) {
    //Serial.print((char)payload[i]);
    data3 += (char)payload[i];
  }
  Serial.println("data: "+ data3);
//   if(data3=="lighton")
//   {
// Serial.println(data3);
// digitalWrite(LED,HIGH);
//   }
//   else
//   {
// Serial.println(data3);
// digitalWrite(LED,LOW);
//   }
// data3="";
}
```

STEP 2:
IOT DEVICE- IOT PLATFORM

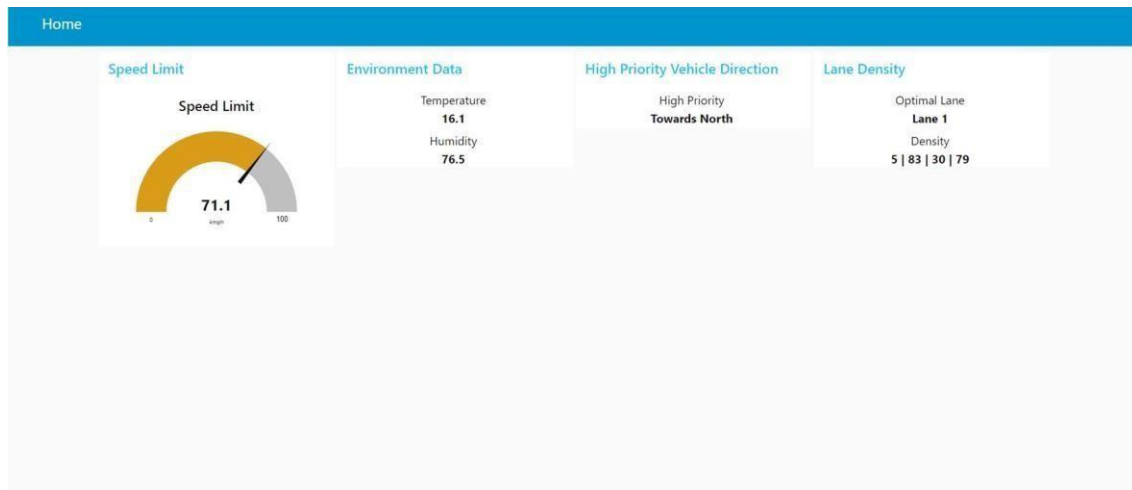By simulating in wokwi platform,the data is published in IBM cloud.

STEP 3:
ESTABLISH IN NODE RED
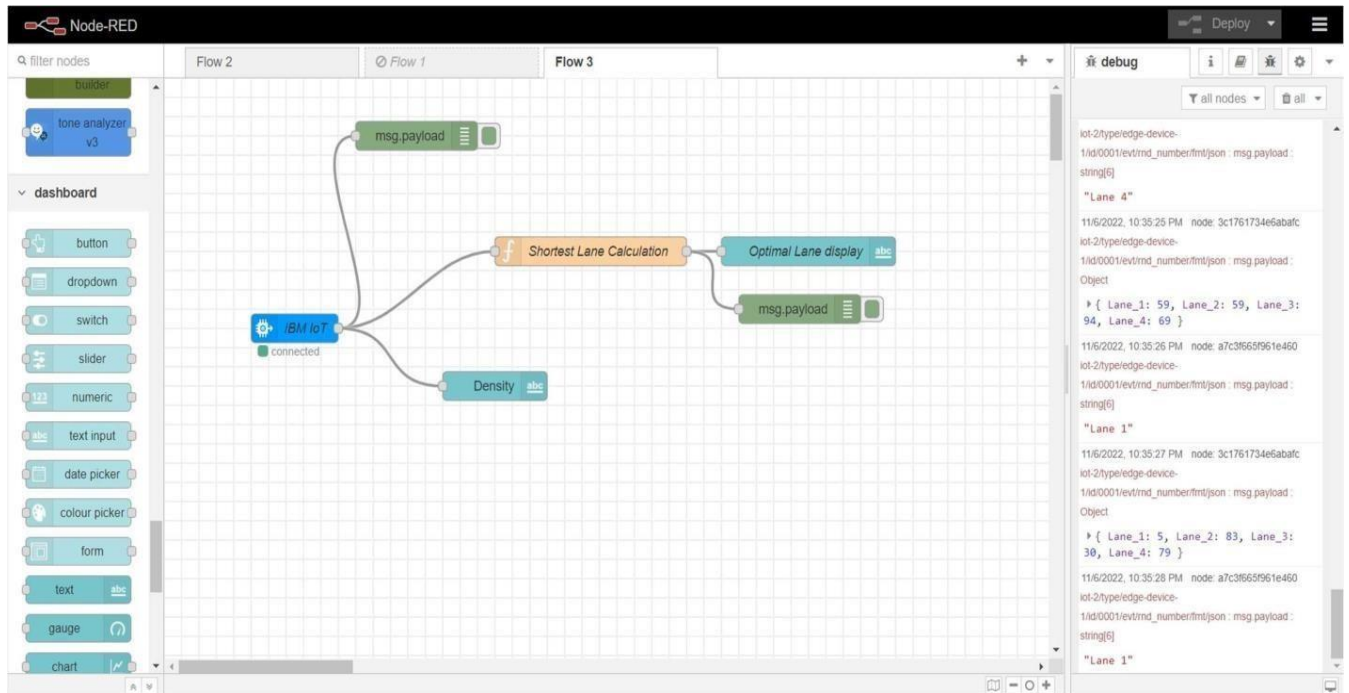
STEP 4:
RESULT
NODE RED WEB UI

THANK YOU