

Real-Time River Water Quality Monitoring and Control System

TEAM ID:-PNT2022TMID15771

1.INTRODUCTION

Now a days water is one of the mandatory for living the life. It is one of the challenge to survive the people in earth. Because of the population is high and the need of the water is also a demand. So we have to predict and how much amount of water is used for our daily purpose. Any imbalance in the quality of water would severely affect the humans health and at the same time it would affect the ecological balance among all species. Water quality refers to the chemical, biological, radiological, and biological parameters of the water. The high use of chemicals in manufacturing, construction and other industries, fertilizers in farms and also directly leaving the polluted water from industries into nearby water bodies have made a huge contribution to the global water quality reduction, which has become an important problem.

1.1 PROJECT OVERVIEW

The main objective of this project is to control the usage of the water in river and how to control it by using the software and giving alerts to the person because all the peoples are using a lot of water for their personal use. The objective of water quality monitoring is to obtain quantitative information on the physical, chemical, and biological characteristics of water via statistical sampling. Real-time Process Monitoring collects data on critical process variables including temperatures, pressures, flow rates, run-times, and can even include things like vibration and electrical draw/load. This additional data empowers manufacturing management while also enhancing floor productivity, quality and compliance. Monitoring allows for proactive response, data security and data gathering and the overall good health of a computer system.

1.2 PURPOSE

The main objective of this research is to monitor the river water level by using the internet of things. This system can keep a strict check on the pollution of the water resources and be able to provide an environment for safe drinking water. Water-quality monitoring is used to alert us to current, ongoing, and emerging problems; to determine compliance with drinking water standards, and to protect other beneficial uses of water

- available on the web in real-time.
- accurate measurements on pH.
- total dissolved salt
- electrical conductivity.

2. LITERATURE SURVEY

The application of IoT and IIoT in environmental remote monitoring and controlling, especially in water and wastewater quality systems has been discussed in many research papers. In a smart water system was developed to prevent water overflow or leakage with auto water pump on/off. The authors used laser sensors for water level detection and the sensors values transmitted through HC12 [24] to the Adarfruit cloud platform via a Wi-Fi module. The cloud platform was designed in such a way that would show the graphical representation of water level and instantaneous value of the current status of water. The online application allows for the monitoring of river water quality. Can determine whether the water contains any dust particles. It is possible to check the water's PH level . You may check particles. It is possible to check the temperature of the water. If the water quality is poor, letting the authorities know so they may go and tell the community not to consume that water. Now a day's Internet of things (IoT) is an innovative technological phenomenon. It is shaping today's world and is used in different fields for collecting, monitoring and analysis of data from remote locations. IoT integrated network is everywhere starting from smart cities, smart power grids, and smart supply chain to smart wearable. Though IoT is still under applied in the field of environment it has huge potential. It can be applied to detect forest fire and early earthquake, reduce air pollution, monitor snow level, prevent landslide, and avalanche etc. a real time water quality monitoring system prototype developed for water monitoring in residential home is presented including availability of cellular network coverage at the site of operation

2.1 EXISTING PROBLEM

Traditional methods of inlet wastewater monitoring involve the manual collection of water samples and the manual reading of the sensors, followed by laboratory analytical techniques to enable early detection and warning in the event of impermissible inlet wastewater to the sewage plant. Such methods take a while to execute and are no longer considered efficient. The current system for monitoring industrial wastewater discharged into the wastewater treatment plant consists of the following components: 1. Analog pH electrode: This electrode is used to monitor the pH of the wastewater inflow. 2. pH transmitter with display: this device is used to display pH readings. 3. SCADA system screen: utilized to monitor all instrument measurements in real-time. The system works as follows: Throughout his shift, the worker checks the display numbers to determine whether they are less than 6.5 or greater than 9, indicating the presence of industrial effluent. The existing technology is incapable of autonomously closing and opening the entrance gates and does not include an audible alarm, SMS notification, or alerts

2.2 REFERENCES

TITLE: Water quality monitoring using wireless sensor networks: Current trends and future research directions

AUTHOR: Abhijit Pathak , Talha Bin Emran

DESCRIPTION: The current approach for monitoring water quality is manual, has a tedious procedure, and takes a lot of time. This research suggests a sensor-based method for monitoring water quality. Multiple sensors make up the system, which measures the physical and chemical characteristics of the water. A microprocessor for running the system, a communication mechanism for inter- and intra-node communication, and a number of sensors are the basic elements of a Wireless Sensor Network (WSN). Remote monitoring and Internet of Things (IoT) technologies can be used to obtain real-time data.

TITLE: Smart Risk Assessment Systems using Belief-rule based DSS and WSN Technologies

AUTHOR:KarlAnderasson

DESCRIPTION: A microprocessor for system processing, a communication system for inter- and intra node communication, and a number of sensors are the core elements of a wireless sensor network (WSN). Remote monitoring and Internet of Things (IoT) technologies can be used to obtain real time data. With the aid of Spark streaming analysis through Spark MLlib, Deep Learning Neural Network Models, Belief Rule Based (BRB) system, and comparison to standard values, data gathered at the separate site may be shown visually on a server PC. The agent will receive an automatic warning SMS alert if the obtained value is higher than the threshold value. Our suggested work is unique in that it aims to provide a water monitoring system with high frequency, high mobility, and cheap cost.

TITLE: The use of artificial neural networks for the prediction of water quality parameters

AUTHOR: Yashwanth Gowda K. N, Spoorth G.B


DESCRIPTION: Given water is becoming the most important resource for all humans, operating drinking water utilities in real time might be difficult. These issues came about as a result of factors including an increasing population, scarce water supplies, ageing infrastructure, etc. Better methods of checking the quality of the water are therefore required. To decrease water population growth and to lessen illnesses associated with water Additionally, according to the World Health Organization (WHO), this catastrophe represents "the biggest mass poisoning of a people in history. This paper's major objective is to create a sensor-based water quality in water monitoring system.

2.3 PROBLEM STATEMENT DEFINITION

Real-time data access can be done by using remote monitoring and Internet of Things (IoT) technology. Data collected at the apart site can be displayed in a visual format on a server PC with the help of Spark streaming analysis through Spark ML lib, Deep learning neural network models, Belief Rule Based (BRB) system and is also compared with standard values. Also it assures low cost efficient water quality monitoring and control over river water. Since its battery operated, it is much safer for the locality and people to use the river water that has low rate of electrical shocks as the battery is completely insulated and rechargeable so that the system is continuous. By using this product people can predict , analyse the hardness of water and also the factors like temperature and turbidity of water for having a safe drinking and water with better consistency for house hold purposes. Since water is an essential compound in our daily basis intake of it in an healthy manner is provided by our cost efficient quality monitoring and control system which is market affordable and greatly life saving factor for people using river water. The environment around consists of five key elements e.g., soil, water, climate, natural vegetation, and landforms. Among these water is the utmost crucial element for human life. It is also vital for the persistence of other living habitats. Whether it is used for drinking, domestic use, and food production or recreational purposes, safe and readily available water is the need for public health . So it is highly imperative for us to maintain water quality balance. Otherwise, it would severely damage the health of the humans and at the same time affect the ecological balance among other species. Using different sensors, this system can collect various parameters from water, such as pH, dissolved oxygen, turbidity, conductivity, temperature, and so on. The rapid development of WSN technology provides a novel approach to real-time data acquisition, transmission, and processing. The clients can get ongoing water quality information from far away. Now a day's Internet of things (IoT) is an innovative technological phenomenon. It is shaping today's world and is used in different fields for collecting, monitoring and analysis of data from remote locations. IoT integrated network is everywhere starting from smart cities, smart power grids, and smart supply chain to smart wearable . Though IoT is still under applied in the field of environment it has huge potential. It can be applied to detect forest fire and early earthquake, reduce air pollution, monitor snow level, prevent landslide, and avalanche etc. Moreover, it can be implemented in the field of water quality monitoring and controlling system . Water quality monitoring has gained more interest among researchers in this twenty-first century. Numerous works are either done or ongoing in this topic focusing on various aspects of it. The key theme of all the projects was to develop an efficient, cost-effective, real time water quality monitoring system which will integrate wireless sensor network and internet of things

3. IDEATION AND PROPOSED SOLUTION

3.1 EMPATHY MAP CANVAS

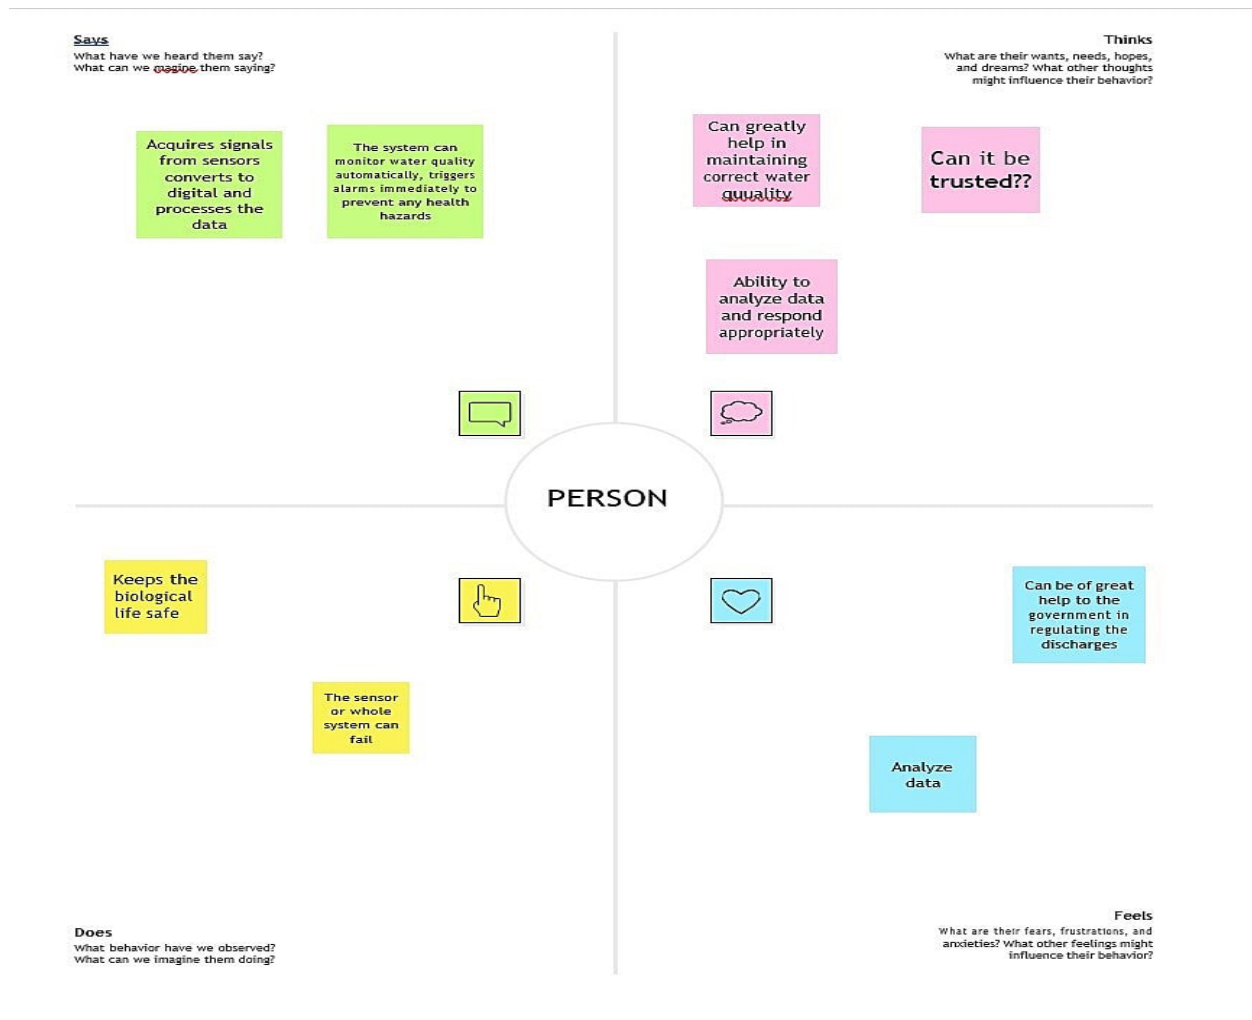

The empathy map is about is describing the project with a gain and pain in this regard the depicts about the outcome of our real time water monitoring system.


3.2 IDEATION AND BRAINSTORMING

4

Prioritize

Your team should all be on the same page about what's important moving forward. Place your ideas on this grid to determine which ideas are Important and which are feasible.

⌚ 20 minutes

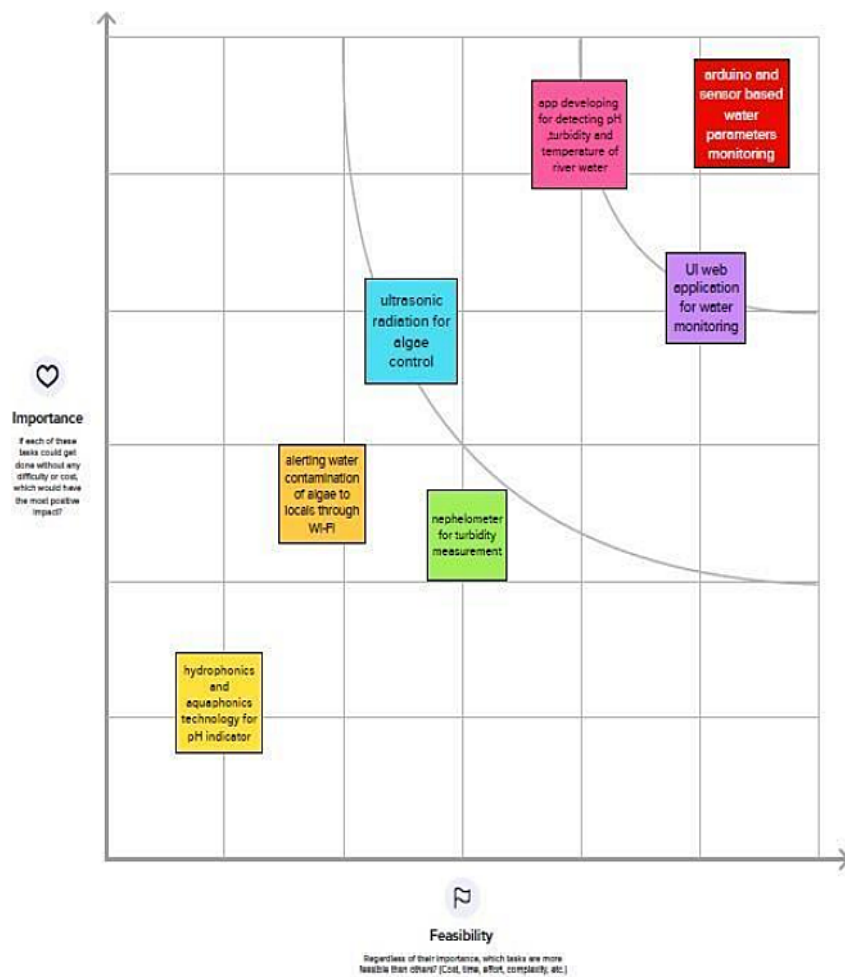

3.3 PROPOSED SOLUTION

S.No.	Parameter	Description
1.	Problem Statement (Problem to be solved)	Massive growth of algae called eutrophication leads to pollution (monitoring and controlling the quality of river water)
2.	Idea / Solution description	Detecting the dust particles, PH level of water, Dissolved oxygen and temperature to be monitored and alerting the authorities if water quality is not good.
3.	Novelty / Uniqueness	River water quality can be monitored by web application. Quality parameter will track continuously with standard measurements.
4.	Social Impact / Customer Satisfaction	Localities will not get suffered by poor quality of water by alerting them when the water quality is not good.
5.	Business Model (Revenue Model)	Water quality monitoring system by sensors for industrial water treatment plant, river bodies, aquaculture, digital loggers.
6.	Scalability of the Solution	Measuring of real time values and continuous monitoring helps in maintaining the quality of water.

3.4 PROBLEM SOLUTION FIT

<p>1. CUSTOMER SEGMENT(S) <small>Who is your customer? i.e. working parents of 0-5 y.o. kids</small></p> <p>CS</p> <p>People living in rural areas near to the river ,who uses river water</p>	<p>6. CUSTOMER CONSTRAINTS <small>What constraints prevent your customers from taking action or limit their choices of solutions? i.e. spending power, budget, no cash, network connection, available devices.</small></p> <p>CC</p> <p>Water quality monitoring system is used for identify the water pollution on specific area. People may find it hard to recover if any fault occurs,this system prevent people from water pollution.</p>	<p>5. AVAILABLE SOLUTIONS <small>Which solutions are available to the customers when they face the problem</small></p> <p>AS</p> <p>Individual notification to each people could be sent,it is not possible . this system will still notify the corporation and they can further notify the people to aware.</p>
--	---	---

<p>2. JOBS-TO-BE-DONE / PROBLEMS <small>Which jobs-to-be-done (or problems) do you address for your customers? There could be more than one; explore different sides.</small></p> <p>J&P</p> <p>The river water quality monitoring system that checks periodically ,the dust particles,temperature and PH level and gave notifies for the public when the water quality varies</p>	<p>9. PROBLEM ROOT CAUSE <small>What is the real reason that this problem exists? What is the back story behind the need to do this job? i.e. customers have to do it because of the change in regulations.</small></p> <p>RC</p> <p>We know that the sensor are expensive and the system needs more than one sensors to work,these sensors are used periodically to check the quality of water and if any problem, need to be replace frequently.</p>	<p>7. BEHAVIOUR <small>What does your customer do to address the problem and get the job done? i.e. directly related: find the right solar panel installer, calculate usage and benefits; indirectly associated: customers spend free time on volunteering work (i.e. Greenpeace)</small></p> <p>BE</p> <p>The customer could use the user guide provided to overcame the problem or else they can report and contact the corporation. They will take care of the problem.</p>
---	---	---

4. REQUIREMENT ANALYSIS

4.1 FUNCTIONAL REQUIREMENTS


FR No.	Functional Requirement (Epic)	Sub Requirement (Story/ Sub-Task)
FR-1	User Login	Confirmation through verified password
FR-2	View Water Details	View current water details in website View traditional water eligibility in website
FR-3	Logout	Logs out the user successfully

4.2 NON FUNCTIONAL REQUIREMENTS

FR No.	Non-Functional Requirement	Description
NFR-1	Usability	Load time for user interface screens shall not be more than 2 seconds.
NFR-2	Security	User account is password protected Account creation done only after email verification
NFR-3	Reliability	Users can access their account 98% of the time without failure
NFR-4	Performance	Load time for user interface screens shall not be more than 2 seconds. Login info verified within 10 seconds.
NFR-5	Availability	Maximum downtime will be about 4 hours
NFR-6	Scalability	System can handle about 1000 users at any given time

5. PROJECT DESIGN

5.1 DATA FLOW DIAGRAM

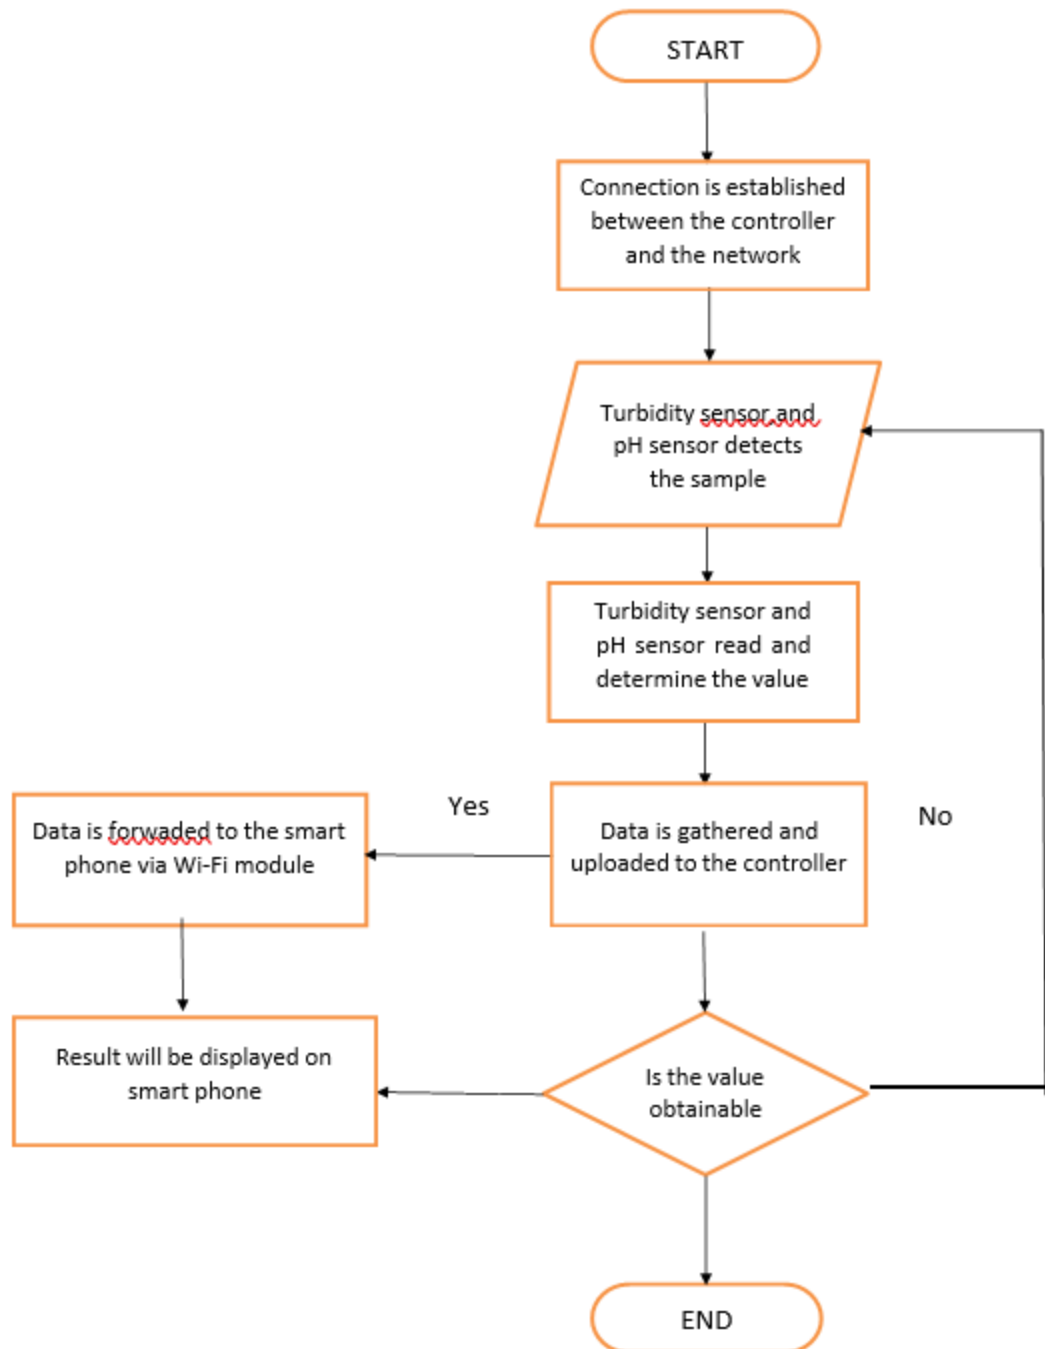

5.2 SOLUTION & TECHNICAL ARCHITECTURE

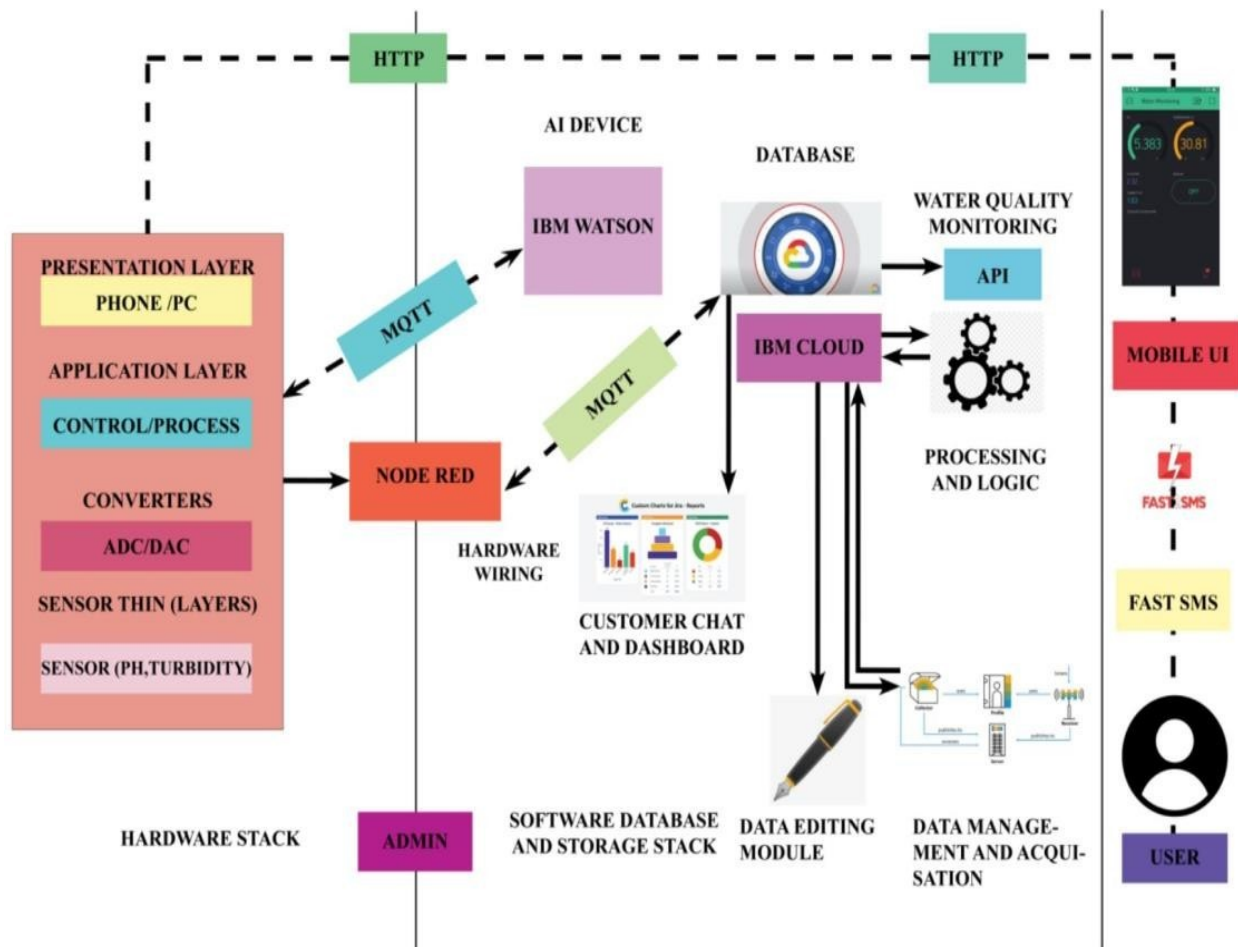


Table-1 : Components & Technologies:

S.No	Component	Description	Technology
1.	User Interface	Mobile UI	HTML, CSS, java script
2.	Application Logic-1(mobile application)	Scale meter is introduced to monitor the waterparameters	Java
3.	Application Logic-2(AI Application)	Forpredicting future valuesof water qualityrange	IBMWatson Assistant
4.	Database	Data Type	NOSQL.
5.	Cloud Database	Database Service on Cloud	IBM Cloudant
6.	File Storage	File storage requirements: Container Platform Version 4.6	IBMBlock Storage
7.	External API-1	The data is used to compare the values for sensorwith threshold values	IBMwater quality API
8.	External API-2	For the locals and authorities to know the waterquality	mobile API,
9.	Machine Learning Model(node-red)	For interfacing hardware and software application(a virtual wiring tool)	Platform: Node.js
10.	Infrastructure (Server/ Cloud)	Application Deployment on cloud Cloud Server Configuration : application-client-bnd	IBMcloud

S.No	Characteristics	Description	Technology
1.	Open-Source Frameworks	Bootstrap	CSS
2.	Security Implementations	MQTT,CoAP,DTLS,6LoWPAN	Encryptions, OWASP
3.	Scalable Architecture	The scalability of architecture (3 – tier)	IOT and mobile application
4.	Availability	Distributed servers	IBM cloud and Watson
5.	Performance	Use of cache,better performance	Fast SMS application

5.3 USER STORIES

1 Phases	Analysing the river water			Finding the pH level of water			Separation of pure water and dirty water			Recycling of dirty water for agricultural use		
High-level steps your user needs to accomplish from start to finish												
2 Steps	Whether the river water is dirty or not			Check whether the pH is between 6.5 and 8.5			Using pure water finding machine			Collect the dirty water and send the water to the recycling factory		
Detailed actions your user has to perform	Check the surroundings of river water	Also find whether the industrial waste are mixing into river water		Check whether the pH is between 6.5 and 8.5	If the pH level is normal we can use it for drinking purpose	So finding the drinking level of pH	Normally people identify the pure water by observing the upper layer, thickness and colour of water	Usage of water purifier to separate pure water and dirty water		Using chemical components for recycling process	Finally recycled water is sent to farmers for agricultural purpose	
3 Feelings	If the river water quality is in correct level, ground water level will increase			If the pH level of river water is matches to the PH level of pure water, they feel good			Supplying some amount of water for commercial uses			The recycling water can also be used for some other purpose		
What your user might be thinking and feeling at the moment	Animals and birds are drinking river water	The river water is essential for human beings.		They feel more secure about their environment	They feel comfortable after drinking pure water daily		They feel happy about drinking pure water.	They might feel secure without worrying about infection or some other problems caused by river water		Also used for some industrial purpose.	In manufacturing company they can also use this recycled water	
	If the river water quality is not good, then the ground water will get decrease	If the river water is polluted then animals and birds cannot able to drink water	Polluted water is not essential for human beings.	Polluted water is not essential for human beings.	People may feel that environment is not clean due to river water is polluted.	They use river water daily and also they are feeling that the river water is not good.	They also worried about the diseases caused due to the polluted river water.	People need the healthy fishes from river water for selling.	They also worried about the living organism.	Coastal people are the major affected people by river water pollution.	Recycling water is sufficient for industrial purpose.	Is the pure water is available for every day.
4 Pain points	Chemical waste products from industrial processes are discharge into river			Because of throwing dusts it will create some mess smell.			This water is harmful for drinking.			Sewage and waste water are mixing into the river water		
Problems your user runs into	Theft of sand from river side may cause the river to dry fast.	Pollution may occur due to acid rain.		Water pollution may cause diseases.	It will affect the Eco system.		This causes harm to the organisms living in the river water	Also increasing river water temperature affects the living organisms		Don't throw any solid waste into the water stream as it clog the flow of water thereby leading to pollution	Climate change will affect river water	
5 Opportunities	We use the detector to easily identify our device			We include sensor for detecting PH level of water.			Water proof device is used for ensuring safety			We can give the guarantee about pure water in case of detecting PH level of river water.		
Potential improvements or enhancements to the experience	Using drone for everytime monitoring	Our device is miniature compared to other devices		Used solar panel for energy.	We insert high quality battery		By using this device we can also control the PH level of the water.	Any time and any where can find the device.		Control the water quality using this device	Life time of the device is more	

6. PROJECT PLANNING & SCHEDULING

6.1 SPRINT PLANNING & ESTIMATION

Sprint	Functional Requirement (Epic)	User Story Number	User Story/ Task	Story Points	Priority	Team Members
Sprint-1	Registration	USN-1	As a user, I can register for the application by entering my email, password, and confirming my password.	2	High	1
Sprint-1	User Confirmation	USN-2	As a user, I will receive confirmation email once I have registered for the application	1	Medium	2
Sprint-1	Login	USN-3	As a user, I can log into the application by entering email & password	2	High	3
Sprint-2	Interface Sensor	USN-1	A sensor interface is a bridge between a device and any attached sensor. The interface takes data collected by the sensor and outputs it to the	2	High	2

			attached device.			
Sprint-3	Coding (Accessing datasets)	USN-1	Coding is a set of instructions used to manipulate information so that a certain input results in a particular output.	2	High	4
Sprint-4	Web Application	USN-1	As a user, I will show the current Information of the River water.	1	Medium	2

6.2 SPRINT DELIVERY SCHEDULE

Sprint	Total Story Points	Duration	Sprint Start Date	Sprint End Date (Planned)	Story Points Completed (as on Planned End Date)	Sprint Release Date (Actual)
Sprint-1	20	4 Days	24 Oct 2022	27 Oct 2022	20	29 Oct 2022
Sprint-2	20	5 Days	28 Oct 2022	01 Nov 2022	20	04 Nov 2022
Sprint-3	20	8 Days	02 Nov 2022	09 Nov 2022	20	11 Nov 2022
Sprint-4	20	9 Days	10 Nov 2022	18 Nov 2022	20	19 Nov 2022

7.CODING & SOLUTIONING

7.1 FEATURE 1

```
import time
i=0
while (i<=10):
    i=i+1
    time.sleep(1)

    import random
    temperature=random.randint(0,30)
    humidity=random.randint(1,100)
    if temperature<=15:
        print(temperature, "temperature is low")
    elif temperature<=25:
        print(temperature, "temperature is normal")
    else :
        print(temperature, "temperature is high")
    if humidity<=30:
        print(humidity, "humidity is low ")
    elif humidity<=60:
        print(humidity, "humidity is normal")
    else :
        print(humidity, "humidity is high")
```

7.2 FEATURE 2

```
#include <LiquidCrystal.h>
LiquidCrystal lcd(12, 13, 11, 10, 9, 8);
int pirPin=7;
int pirInput=0;
int bulbPin=6;
int photoValue=0;
int tempReading=0,temp1=0,temperature=0;
int fanPin=5;
int gasReading=0;
int greenLed=4;
int yellowLed=3;
int redLed=2;
int piezoPin=0;
void scrollScreenSaver() {
    lcd.clear() ;
    lcd.setCursor(15, 0);
    lcd.print("Welcome");
    lcd.setCursor(15, 1);
    lcd.print("to my home");
    for (int positionCounter = 0; positionCounter < 22; positionCounter++) {
        lcd.scrollDisplayLeft();
        delay(50);
    }
}
void setup()
{
    lcd.begin(16, 2);
    lcd.print("hello, world!");
    pinMode(pirPin, INPUT);
    pinMode(bulbPin, OUTPUT);
}
void loop()
{
    lcd.setCursor(0, 1);
    lcd.print(millis() / 1000);
    pirInput=digitalRead(pirPin);
    photoValue=analogRead(A0);
    Serial.println(photoValue);
    tempReading=analogRead(A1);
```

```

temperature=(5000.0/1024.0*tempReading/10.0);
Serial.println(temperature);
gasReading=analogRead(A2);
Serial.println(gasReading);
Serial.println(".....");
digitalWrite(greenLed,gasReading>100 ? HIGH : LOW);
digitalWrite(yellowLed,gasReading>200 ? HIGH : LOW);
digitalWrite(redLed,gasReading>300 ? HIGH : LOW);
if(pirInput==HIGH)
{
  lcd.clear();
  lcd.setCursor(0,0);
  lcd.print("Motion Detected");
  if(photoValue<300)
  {
    digitalWrite(bulbPin,HIGH);
    lcd.setCursor(0,1);
    lcd.print("Light is on");
    delay(1000);
  }
  if(temperature>25)
  {
    digitalWrite(fanPin,HIGH);
    lcd.setCursor(0,1);
    lcd.print("          ");
    lcd.setCursor(0,1);
    lcd.print("Fan is on");
    delay(1000);
  }
}
else
{
  scrollScreenSaver() ;
}
delay(1000);
digitalWrite(13, LOW);
delay(1000);
}


```

8. TESTING

8.1 TEST CASES

```
6 temperature is low
88 humidity is high
1 temperature is low
25 humidity is low
11 temperature is low
79 humidity is high
20 temperature is normal
13 humidity is low
9 temperature is low
92 humidity is high
12 temperature is low
42 humidity is normal
17 temperature is normal
75 humidity is high
27 temperature is high
23 humidity is low
13 temperature is low
80 humidity is high
10 temperature is low
14 humidity is low
10 temperature is low
22 humidity is low

...Program finished with exit code 0
Press ENTER to exit console.
```

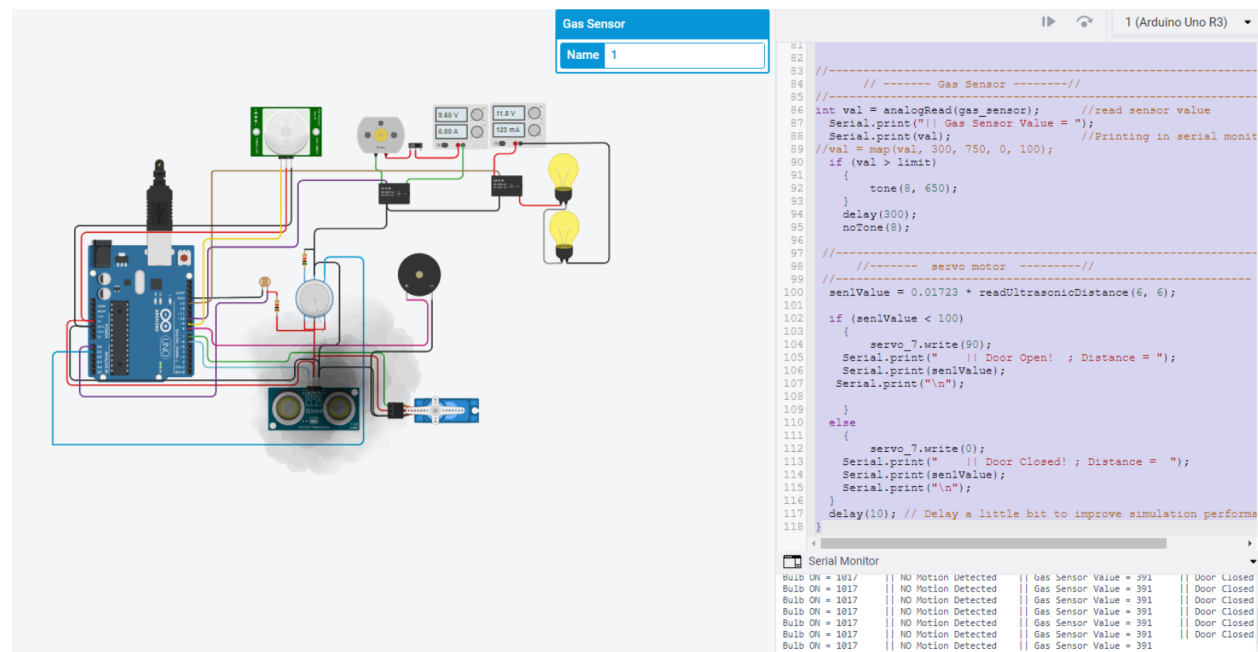

8.2 USER ACCEPTANCE TESTING

Dashboard ▾

[Edit dashboard](#) [Upgrade account](#) [Create resource](#) +

For you

Select an option ▾

Build

Explore IBM Cloud with this selection of easy starter tutorials and services.

Explore IBM Cloud Shell

Try a command-driven approach for creating, developing, and deploying a web project.

Getting started 2 min

Create and deploy an application

Browse our starter kits, and then select one to jump start the process to create and deploy your app.

Getting started 5 min

Visit the IBM Cloud catalog

Explore our unique product catalog that contains 190+ services and software for your business solutions.

Getting started 1 min

Build a web app with Watson Speech to Text

Deploy a conversational interface compatible with any application, device, or channel.

Getting started 15 min

Invite Users

Invite users to join your account and get started or something new.

Recommended 3 n

News

View all

WebSphere Application Server Support Restatement

IBM Adds Lifecycle Services to Enterprise Networking and Deepens Strategic Partnership with Cisco

Recent support cases

View all

Planned maintenance

View all

IBM Cloud status

View all

9. RESULTS

9.1 PERFORMANCE METRICES

The proposed system can provide an efficient IoT-based dynamic, continuous, and real-time online monitoring of the industrial wastewater discharged into wastewater treatment plants, as well as remote control of the water's path to avoid all forms of damage. The system is designed for low cost, small size, high sensitivity, easy operation, and lightweight. It minimizes the time involved in lab testing. The results are recorded in the cloud so that any previous data of testing can be selected easily. No wired Networks were used. The system has more scalability of sensors and reduces power consumption: it is easy to add new sensors and new IoT devices, and more than two sensors can be connected to one IoT module. The wastewater department can easily analyze the data and make reports. Using IoT, an integrated sensor is used to analyze the accuracy of data in real-time. These sensors could share data among various wastewater stations in the city because they are connected to IoT networks. Further, SMS notifications keep all administrators up to date on all events and allow for continuous follow-up, making control, monitoring, and decision-making easier. It reduces the manpower as less manual work is needed. The government can identify the company that discharged illegal industrial wastewater based on the data and act against the guilty parties. Network management enables users to connect to any available WIFI network for flexibility of use in different locations, rather than being restricted to a fixed WIFI network in the current location. Communication management supports auto transfer mode between WIFI and GPRS connections in the case of WIFI disconnection to ensure continuous data transfer. The primary advantage of any system is that the operators in each station have fast access to various reports to make decisions. The proposed system has the advantage of enabling remote ON/OFF Control in different wastewater stations. The proposed system provides various alert options.

10. ADVANTAGES & DISADVANTAGES

ADVANTAGES:-

- The boat is mobile in nature and hence large number of samples are easily collected from different locations in less time.
- It is very easy to maintain the IoT based water quality monitoring system as all the electronic boards are available in the boat itself.
- The system is very cheap as the hardware and software does not cost much.
- Machine learning techniques have made it very easy to plot the data collected in various formats for proper analysis.
- Cloud storage platforms such as adafruit, azure helps in storing the sensor data immediately and wirelessly to the robust servers.

DISADVANTAGES:-

- It is difficult to collect the water samples from all the area of the water body.
- The cost of analysis is very high.
- The lab testing and analysis takes some time and hence the lab results does not reflect real time water quality measurement due to delay in measurement.
- The process is time consuming due to slow process of manual data collection from different locations of the water body.
- The sensors are very expensive. Moreover their maintenance cost is also very high. This leads to higher cost on the regulatory body.
- The sensors which work on power source may often required to be replaced in case of malfunctioning.

11. CONCLUSION

Our main intentions of this research work were to create a small, economical, flexible, easily configurable, and portable system that could monitor, and control industrial wastewater discharged into waste water treatment plants and prevent damage in the treatment process and equipment and protect the workers which are not qualified to deal with such type of water. Real-time data access can be done by using remote monitoring and Internet of Things (IoT) technology. Data collected at the apart site can be displayed in a visual format on a server PC with the help of Spark streaming analysis through Spark MLlib, Deep learning neural network models, Belief Rule Based (BRB) system and is also compared with standard values. Also it assures low cost efficient water quality monitoring and control over river water. Since its battery operated, it is much safer for the locality and people to use the river water that has low rate of electrical shocks as the battery is completely insulated and rechargeable so that the system is continuous. By using this product people can predict, analyse the hardness of water and also the factors like temperature and turbidity of water for having a safe drinking and water with better consistency for house hold purposes. Since water is an essential compound in our daily basis intake of it in a healthy manner is provided by our cost efficient quality monitoring and control system which is market affordable and greatly life saving factor for people using river water. The environment around consists of five key elements e.g., soil, water, climate, natural vegetation, and landforms. Among these water is the utmost crucial element for human life. It is also vital for the persistence of other living habitats. Whether it is used for drinking, domestic use, and food production or recreational purposes, safe and readily available water is the need for public health. The system can achieve reliability and feasibility in the monitoring processing by verifying the parameters of water and the warnings notifications which made the system more flexible and controllable. This research protects the natural ecosystem of water resources. Based on the comparison study, the proposed system was found to outperform the existing system and related work.


12. FUTURE SCOPE

More water parameters will hopefully be added in future work so that all water parameters can be analyzed. Further improvisation will develop a custom dashboard using the mobile application would be ideal for such application in consumer networks. This research protects the natural ecosystem of water resources. Based on the comparison study, the proposed system was found to outperform the existing system and related work. Physical parameters such as DO, turbidity, conductivity, Residual Chlorine, waste water Flow will be added to the system using additional sensors to propose a complete SCADA system that integrates with IoT technology for real-time monitoring of all pumping stations and treatment plants. Automatic control of all equipment was done based on results and sending SMS notifications for abnormal values and necessary actions to be taken by the users. Furthermore, it is vital to protect sensor data communication via wireless networks from intrusion. Machine learning will be used to supplement the system, which will be a terrific addition to the system in keeping.

13. APPENDIX

SOURCE CODE

```
import random
print('Hazardous Water Level=',str(random.randint(0,100)))
print('Temperature=',str(random.randint(0,100)))
print('Humidity=',str(random.randint(0,100)))
print('Pressure=',str(random.randint(0,100)))
```

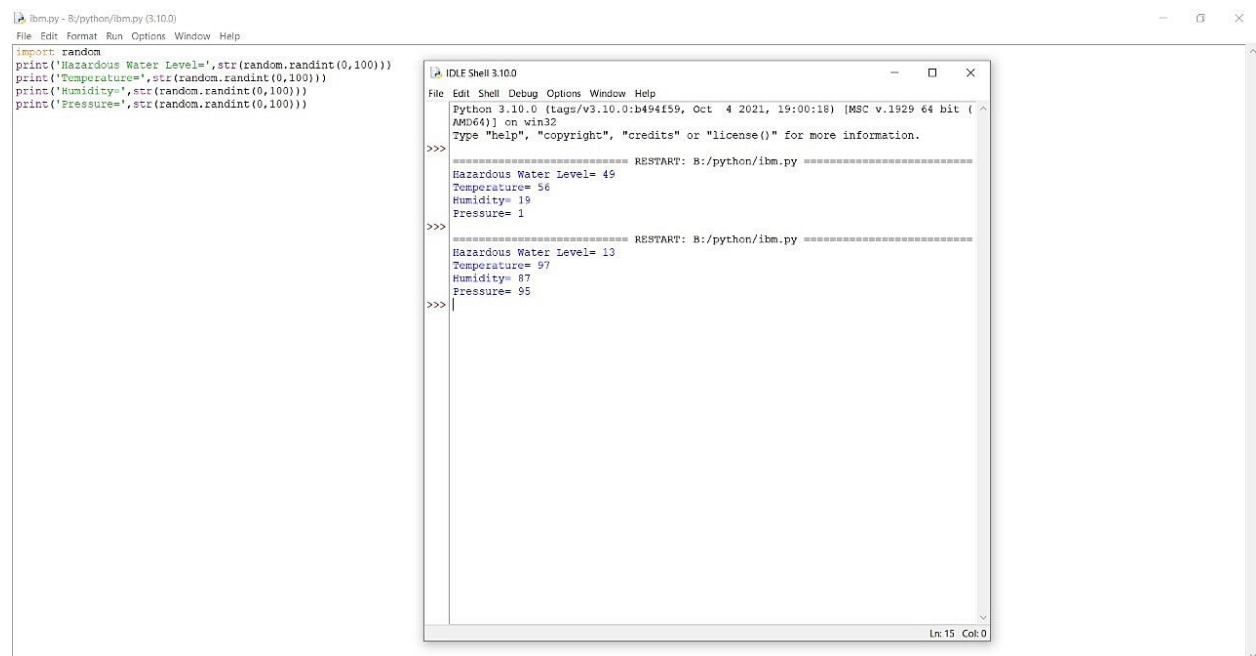

The screenshot displays a Python IDE window titled 'ibm.py - 8/python/ibm.py (3.10.0)'. The editor contains the source code from the previous block. An 'IDLE Shell 3.10.0' window is open, showing the execution of the script. The shell output includes the Python version and build information, followed by two execution runs separated by 'RESTART' markers. The first run produces the following output:

```
Hazardous Water Level= 49
Temperature= 56
Humidity= 19
Pressure= 1
```

The second run produces the following output:

```
Hazardous Water Level= 13
Temperature= 97
Humidity= 87
Pressure= 95
```

The shell window status bar at the bottom indicates 'Ln: 15 Col: 0'.

GITHUB LINK:-

<https://github.com/IBM-EPBL/IBM-Project-17650-1659674710/tree/main/FINAL%20DELIVERABLES>

DEMO VIDEO LINK:-

https://drive.google.com/drive/folders/1Ltw_TMBfLL3ESb6BTMKAIk_LaCG46jIX?usp=share_link

