## Assignment 4

### **WOKWI STIMULATOR**

#### **QUESTION:**

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cms send "alert" to ibm cloud and display in device recent events. Upload document with wokwishare link and images of ibm cloud.


### **CODE:**

```
#include <WiFi.h>//library for wifi
#include <PubSubClient.h>//library for MQtt
#define TrigPIN 15
#define EchoPIN 4
#define MINDIST 100
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);
#define ORG "X6W8jl"
#define DEVICE TYPE "NodeMCU"
#define DEVICE ID "12345"
#define TOKEN "123456781" //Token
String data3;
float h, t;
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";// Server Name
char publishTopic[] = "iot-2/evt/msg/fmt/json";// topic name and type of event
char subscribetopic[] = "iot-2/cmd/command/fmt/String";// cmd REPRESENT command
type AND COMMAND IS TEST OF FORMAT STRING
char authMethod[] = "use-token-auth";// authentication method
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE TYPE ":" DEVICE ID;//client id
WiFiClient wifiClient; // creating the instance for wificlient
PubSubClient client(server, 1883, callback ,wifiClient); //calling the
predefined client id by passing parameter like server id, portand wificredential
void setup()// configureing the ESP32
 Serial.begin(115200);
```

```
pinMode(TrigPIN, OUTPUT);
 digitalWrite(TrigPIN, LOW);
 pinMode(EchoPIN, INPUT);
 delay(10);
 Serial.println();
 wificonnect();
 mqttconnect();
void loop()// Recursive Function
 unsigned long t1;
 unsigned long t2;
 unsigned long pulse_Width;
 float distance;
 digitalWrite(TrigPIN, HIGH);
 delayMicroseconds(10);
 digitalWrite(TrigPIN, LOW);
 pulse_Width = pulseIn(EchoPIN,HIGH);
 distance= pulse_Width *0.034 / 2;
 if(distance<100)</pre>
   PublishData();
 delay(1000);
 if (!client.loop()) {
   mqttconnect();
void PublishData() {
 mqttconnect();//function call for connecting to ibm
    creating the String in in form JSon to update the data to ibm cloud
 String payload = "{\"MESSAGE\":\"ALERT\"}";
 Serial.print("Sending payload: ");
 Serial.println(payload);
 if (client.publish(publishTopic, (char*) payload.c_str())) {
```

```
Serial.println("Publish ok");// if it sucessfully upload data on the cloud
failed
 } else {
   Serial.println("Publish failed");
void mqttconnect() {
 if (!client.connected()) {
   Serial.print("Reconnecting client to ");
   Serial.println(server);
   while (!!!client.connect(clientId, authMethod, token)) {
     Serial.print(".");
     delay(500);
     initManagedDevice();
    Serial.println();
void wificonnect() //function defination for wificonnect
 Serial.println();
 Serial.print("Connecting to ");
 WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to establish
 while (WiFi.status() != WL_CONNECTED) {
   delay(500);
    Serial.print(".");
 Serial.println("");
 Serial.println("WiFi connected");
 Serial.println("IP address: ");
 Serial.println(WiFi.localIP());
void initManagedDevice() {
 if (client.subscribe(subscribetopic)) {
   Serial.println((subscribetopic));
   Serial.println("subscribe to cmd OK");
 } else {
   Serial.println("subscribe to cmd FAILED");
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
```

## **CONNECTIONS**:

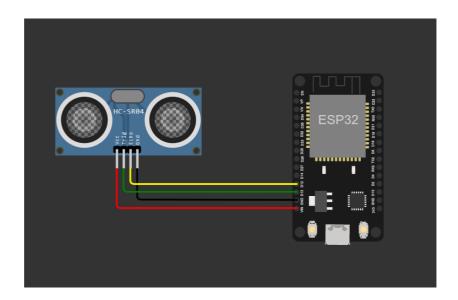

# **WOKWI LINK:**

https://wokwi.com/projects/348022240632111698

#### Output

